


ARK

5通先导型电磁阀 5-Port Pilot Operated Solenoid Valve Series KVF6000



KVF6120-□G



KVF6120-□D




KVF6220-□DZ

规格 Specifications

型号	Model	KVF6120	KVF6220	KVF6320	KVF6420	KVF6520
		KVF6120LT	KVF6220LT	KVF6320LT	KVF6420LT	KVF6520LT
接管口径	Port Size	PT1/2"				
使用流体	Fluid	洁净空气 Clean Air				
工作压力范围	Operating Pressure Range (MPa)	0.15~1.0		0.2~1.0		
有效截面积	Effective Sectional Area (mm²)	65.0		50.0		
环境及流体温度	Ambient & Fluid Temp.	5~60°C (标准型); -15~60°C (耐低温型)				
响应时间	Response Time(5bar)	≤30ms		≤40ms		
最大操作频率	Max.Working Frequency	2c/sec		1c/sec		
润滑*	Lubrication	不需要 Not Required				
手动方式	Manual Override	无锁定按钮式(标准) Push Button (Standard) 旋转锁定式(可选) Lever Lock (Option)				
频率/标准电压	Frequency/Rated Voltage	AC110, AC220 (50/60Hz) / DC12V, DC24V				
容许电压波动范围 Permissible Voltage Variation		标准电压的±10% ±10% of Rated Voltage				
绝缘种类		F级或相同等级 Class F or Equivalent				
功率消耗	Power Consumption	AC	持续 Holding 5.5VA (50/60Hz)			
		DC	2.5W			

* 若需要润滑请用透平1号油ISOVG32
Use Turbine Oil 1st-grade ISOVG32, if necessary


型号表示方法 How To Order

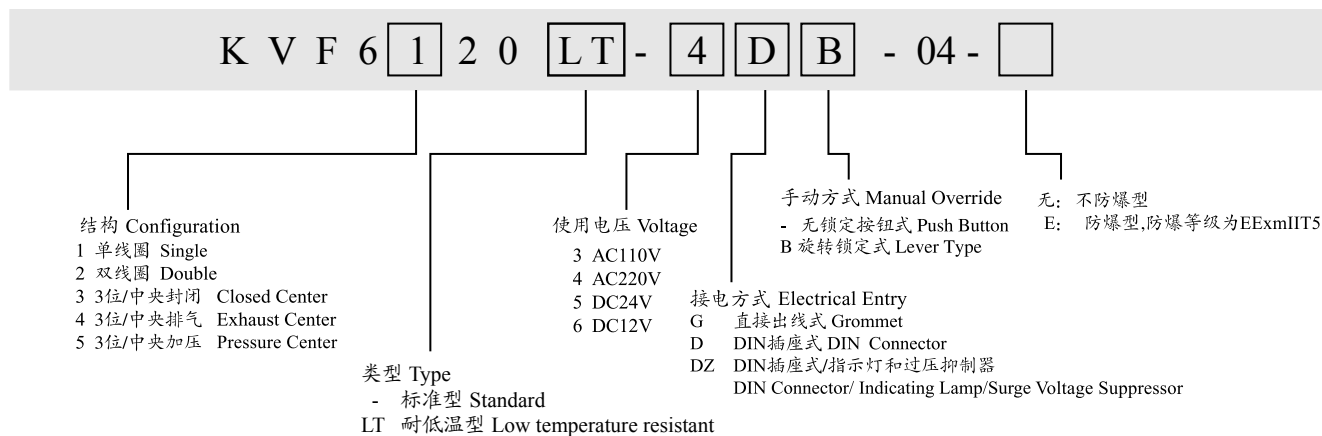


5通先导型电磁阀 5-Port Pilot Operated Solenoid Valve
Series KVF6000
外形尺寸图 Dimensions (mm)

直接出线 (Grommet Type)

KVF6120(LT)-□G-04

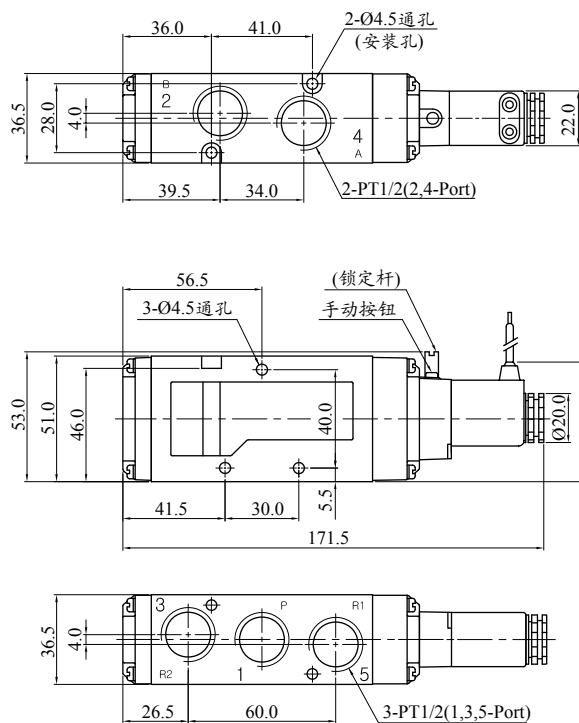


KVF6220(LT)-□G-04

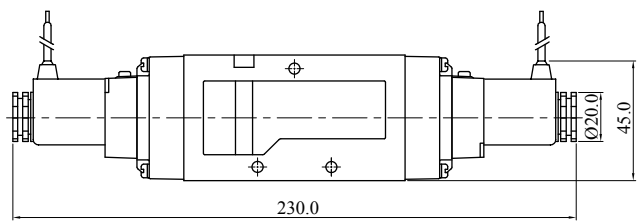



KVF6320(LT)-□G-04

4
5

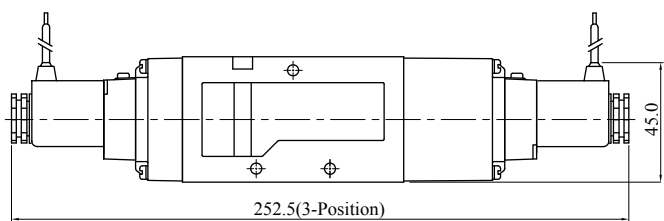

外形尺寸图 Dimensions (mm)

KVF6120- □ D-04

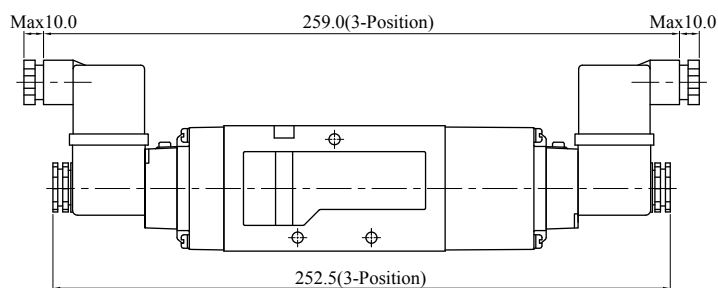

######