




ISO-2规格5通气控阀（底座配管型）
 ISO-2 5-Port Air Operated Valve
 (Base Ported)
 Series KVFA7□40



KVFA 7140-06

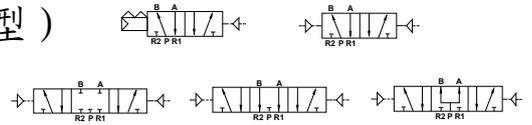

KVFA 7240-06

规格 Specifications

型号	Model	KVFA7140	KVFA7240	KVFA7340	KVFA7440	KVFA7540
接管口径	Port Size	PT3/8", PT1/2", PT3/4"				
气控孔口径	Pilot Port Size	PT1/8"				
使用流体	Fluid	洁净空气 Clean Air				
工作压力范围	Operating Pressure Range (MPa)	0.15~1.0				0.2~1.0
有效截面积	Effective Sectional Area (mm ²)	65.0				50.0
环境及流体温度	Ambient & Fluid Temp.	5~60°C				
*润滑	Lubrication	不需要 Not Required				

* 若需要润滑请用透平1号油ISOVG32
 Use Turbine Oil 1st-grade ISOVG32, if necessary.

型号表示方法 How To Order




结构 Configuration
 1 单气控 Single
 2 双气控 Double
 3 3位中央封闭 Closed Center
 4 3位中央排气 Exhaust Center
 5 3位中央加压 Pressure Center


接管口径 Port Size
 03 3/8"
 04 1/2"
 06 3/4"

ISO-2规格5通气控阀 (底座配管型)
 ISO-2 5-Port Air Operated Valve (Base Ported)
 Series KVFA7□40
 外形尺寸图 Dimensions (mm)

KVFA 7140

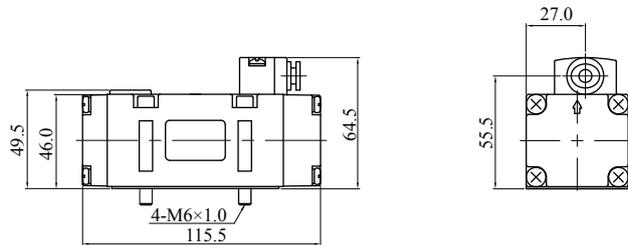


KVFA 7240




KVFA 7340

4
5

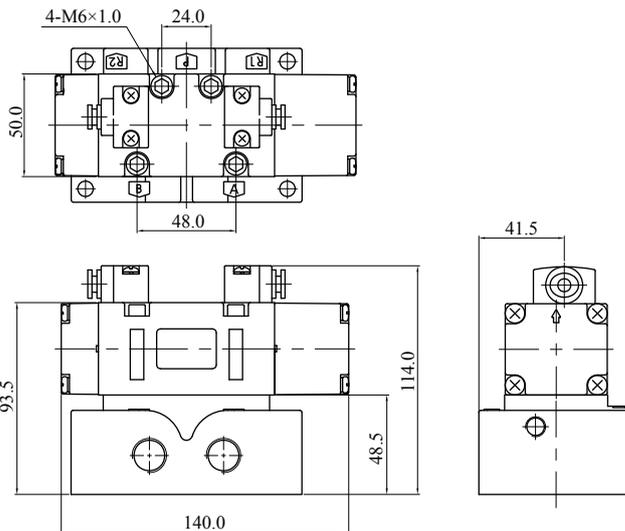

底座外型尺寸图 Sub Base Dimensions (mm)

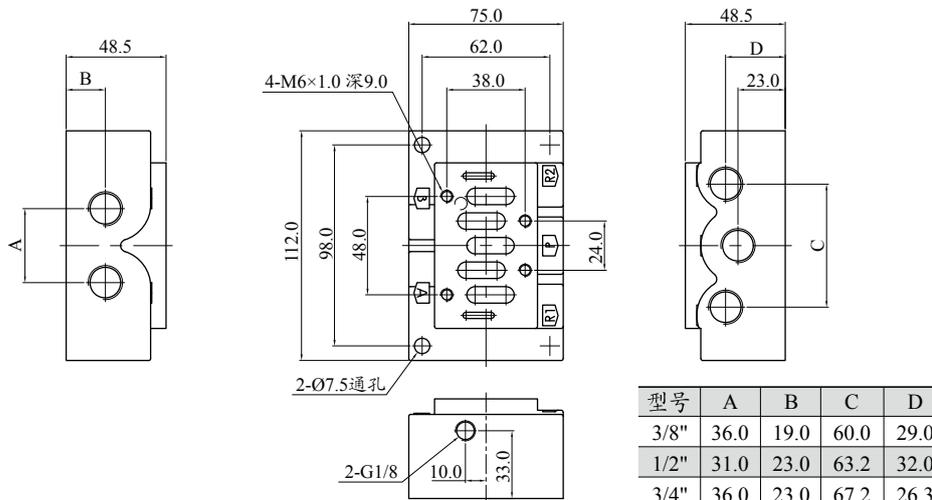

型号	A	B	C	D
3/8"	36.0	19.0	60.0	29.0
1/2"	31.0	23.0	63.2	32.0
3/4"	36.0	23.0	67.2	26.3