


# ARK

## ISO-3规格5通气控阀 (底座配管型) ISO-3 5-Port Air Operated Valve (Base Ported) Series KVFA8□40



KVFA 8140-06

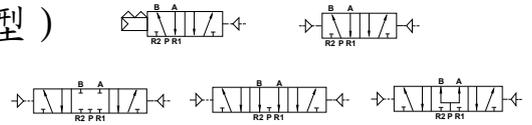

KVFA 8240-06

### 规格 Specifications

型号	Model	KVFA8140	KVFA8240	KVFA8340	KVFA8440	KVFA8540
接管口径	Port Size	PT3/4", PT1"				
气控孔口径	Pilot Port Size	PT1/8"				
使用流体	Fluid	洁净空气 Clean Air				
工作压力范围	Operating Pressure Range (MPa)	0.2~1.0		0.25~1.0		
有效截面积	Effective Sectional Area (mm <sup>2</sup> )	90.0		70.0		
环境及流体温度	Ambient & Fluid Temp.	5~60°C				
*润滑	Lubrication	不需要 Not Required				

\* 若需要润滑请用透平1号油ISOVG32  
Use Turbine Oil 1st-grade ISOVG32, if necessary.

### 型号表示方法 How To Order


K V F A 8 1 4 0 - 06

结构 Configuration  
 1 单气控 Single  
 2 双气控 Double  
 3 3位中央封闭 Closed Center  
 4 3位中央排气 Exhaust Center  
 5 3位中央加压 Pressure Center


接管口径 Port Size  
 06 3/4"  
 10 1"

ISO-3规格5通气控阀 (底座配管型)  
 ISO-3 5-Port Air Operated Valve (Base Ported)  
 Series KVFA8□40  
 外形尺寸图 Dimensions (mm)

KVFA 8140

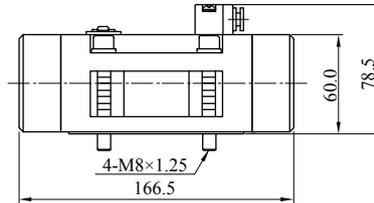


KVFA 8240

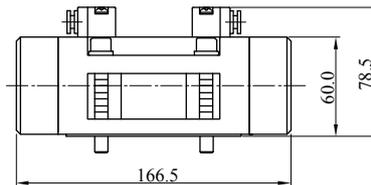

KVFA 8340

4  
5

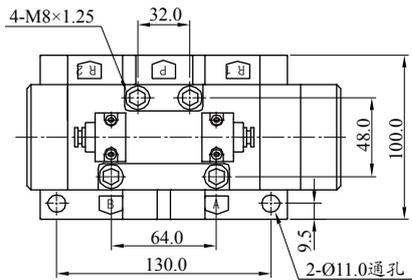

型号	A	B
3/4"	42.5	84.0
1"	50.0	90.0

