




5通机械阀
5-Port Mechanical Valve
Series KVFM350



KVFM350-02-00 KVFM350-02-01

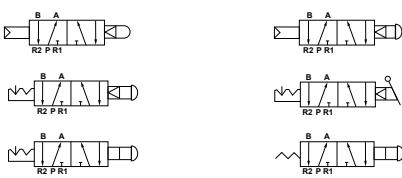

KVFM350-02-33 KVFM350-02-30



KVFM350-02-34

规格 Specifications

规格	Model	KVFM350
接管口径	Port Size	PT1/4"
使用流体	Fluid	洁净空气 Clean Air
工作压力范围	Operating Pressure Range (MPa)	0~0.8
有效截面积	Effective Sectional Area (mm²)	19.0
环境及流体温度	Ambient & Fluid Temp.	5~60°C
* 润滑	Lubrication	不需要 Not Required

* 若需要润滑请用透平1号油ISOVG32
Use Turbine Oil 1st-grade ISOVG32, if necessary.

型号表示方法How To Order

KVFM

350

-

02

-

01

接管口径

02

Port Size

1/4"

驱动机构

Actuator

00 基本 Basic

01 滚轮杠杆 Roller Lever

01-S 硬钢滚轮杠杆 Bearing Steel Roller Lever


30 按钮（蘑菇型） Push Button (Mushroom)

33 按钮（平型） Push Button (Flat)


34 旋转选择（2位） Selector (2-Position)

5通机械阀 5-Port Mechanical Valve
Series KVFM350
外形尺寸图 Dimensions (mm)

基本 Basic
KVFM 350-02-00

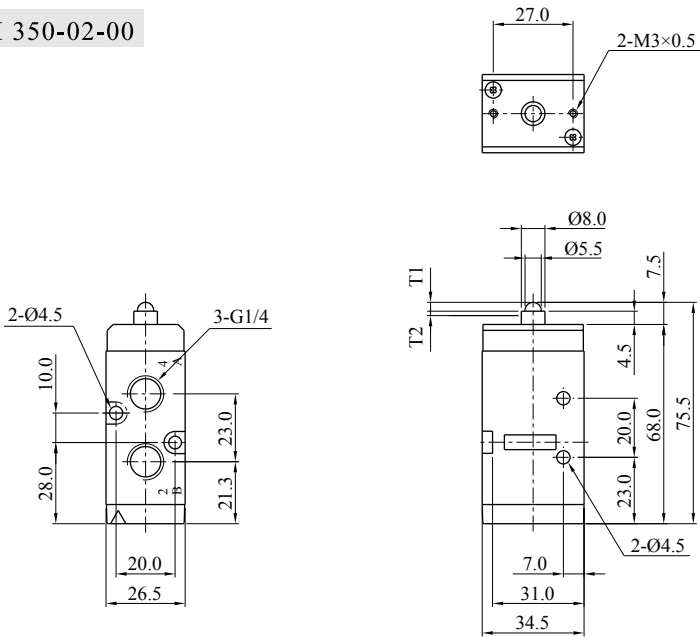


T1	Valid operation distance	3.6 mm
T2	Invalid operation distance	1.0 mm
F1	Pressure for valid operation	3.5 kgf
F2	Pressure for invalid operation	3.5 kgf




2

滚轮杠杆 Roller Lever
KVFM 350-02-01/KVFM 350-02-01S

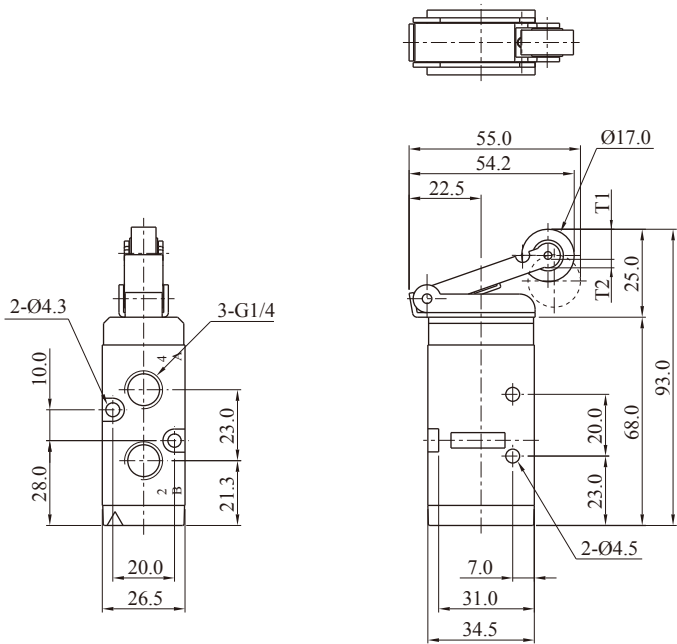


T1	Valid operation distance	9.0 mm
T2	Invalid operation distance	3.0 mm
F1	Pressure for valid operation	1.5 kgf
F2	Pressure for invalid operation	1.5 kgf

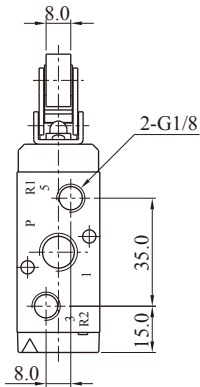

5通机械阀 5-Port Mechanical Valve
Series KVFM350
外形尺寸图 Dimensions (mm)


按钮（蘑菇型） Push Button (Mushroom)

KVFM 350-02-30

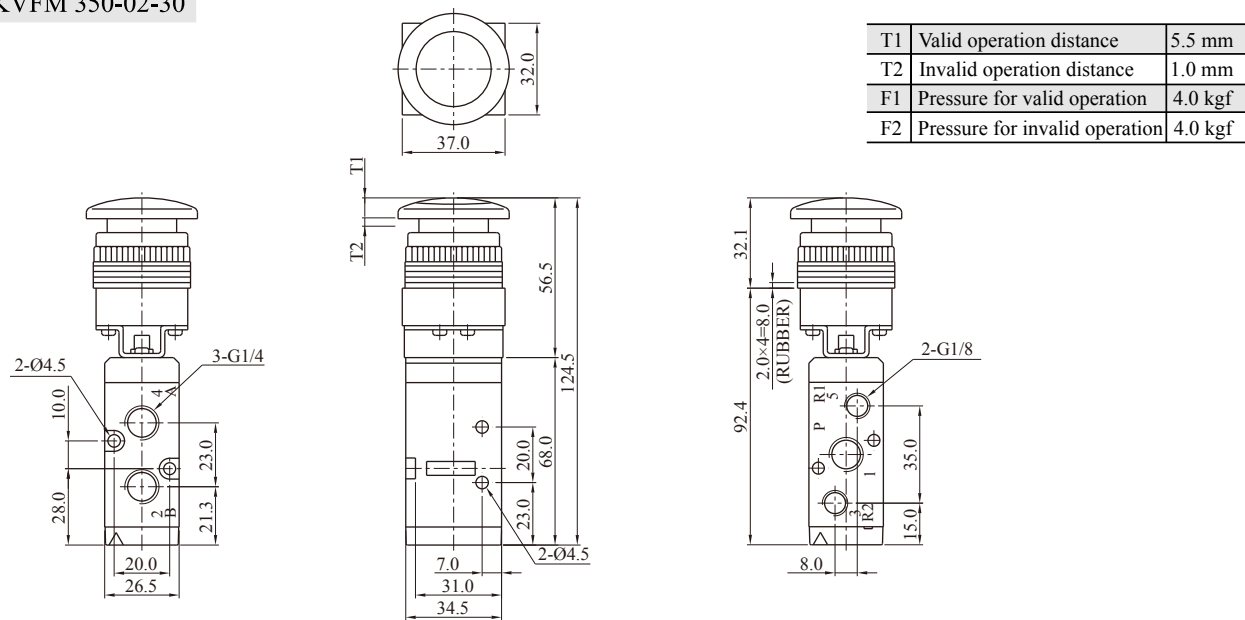


按钮（平型） Push Button (Flash)

KVFM 350-02-33

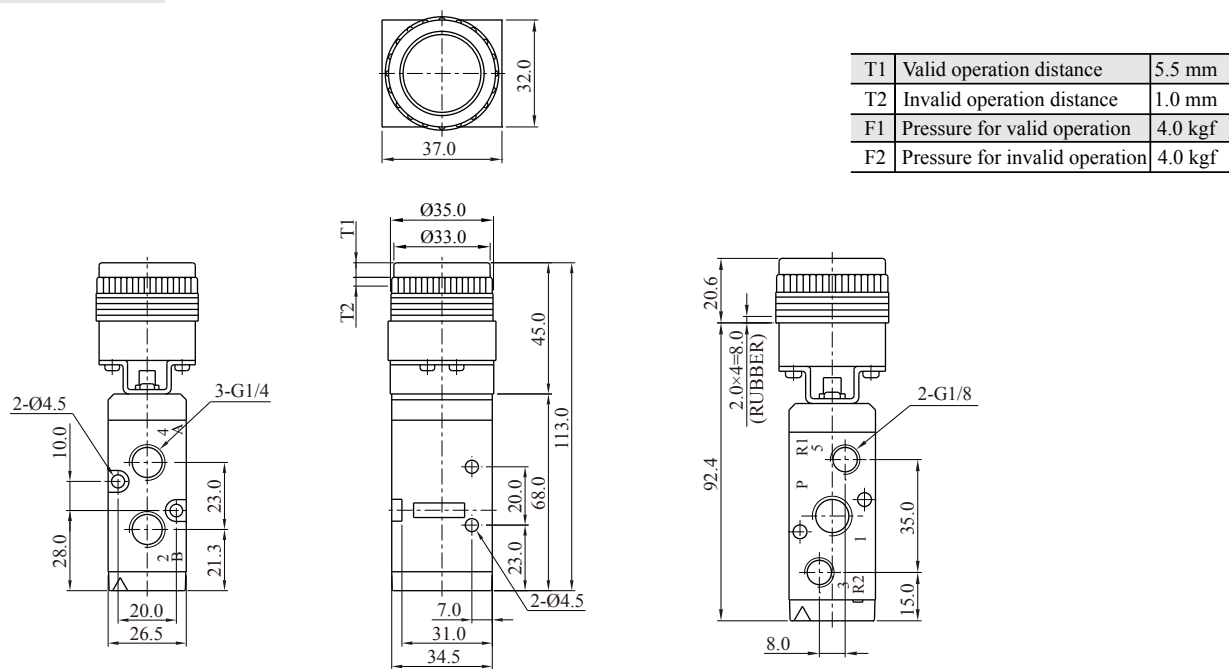

5通机械阀 5-Port Mechanical Valve Series KVFM350 外形尺寸图 Dimensions (mm)

旋转旋转（2位） Selector (2-Position)
 KVFM 350-02-34



T1	Valid operation distance	5.5 mm
T2	Invalid operation distance	1.0 mm
F1	Pressure for valid operation	4.0 kgf
F2	Pressure for invalid operation	4.0 kgf

