


ARK

3通机械阀
3-Port Mechanical Valve
Series KVM230




规格 Specifications

型号	Model	KVM230
接管口径	Port Size	PT1/4"
使用流体	Fluid	洁净空气 Clean Air
工作压力范围	Operating Pressure Range (MPa)	0~0.8
有效截面积	Effective Sectional Area (mm²)	16
环境及流体温度	Ambient & Fluid Temp.	5~60°C
* 润滑	Lubrication	不需要Not Required

* 若需要润滑请用透平1号油ISOVG32
Use Turbine Oil 1st-grade ISOVG32, if necessary.


型号表示方法 How To Order

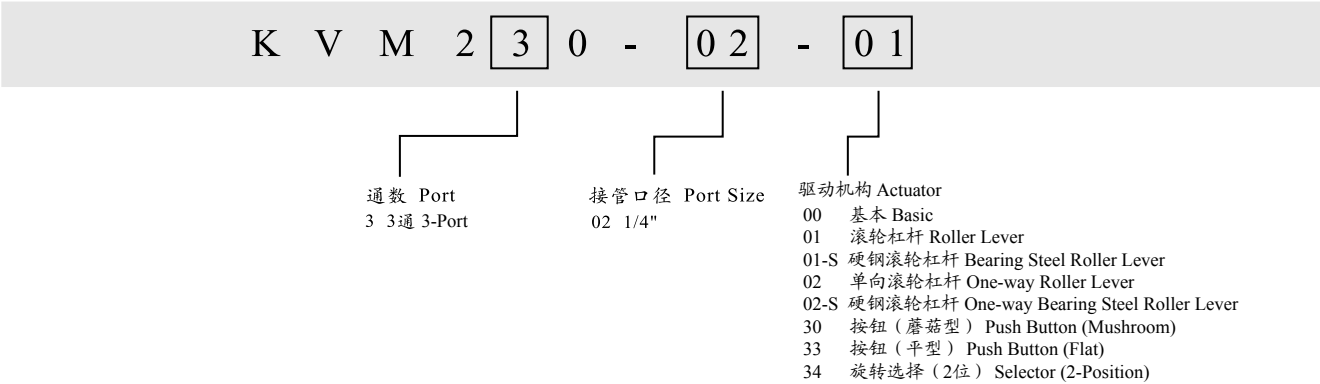

3通机械阀 3-Port Mechanical Valve Series KVM230 外形尺寸图 Dimensions (mm)


基本 Basic

KVM 230-02-00

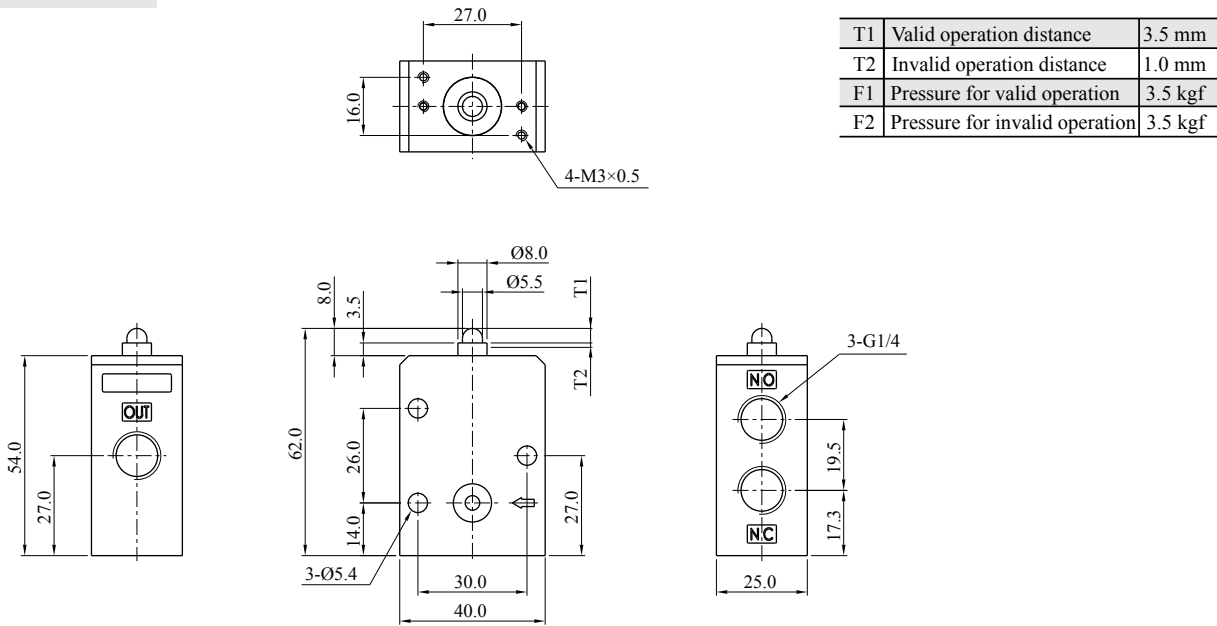


滚轮杠杆 Roller Lever

KVM 230-02-01/KVM 230-02-01S

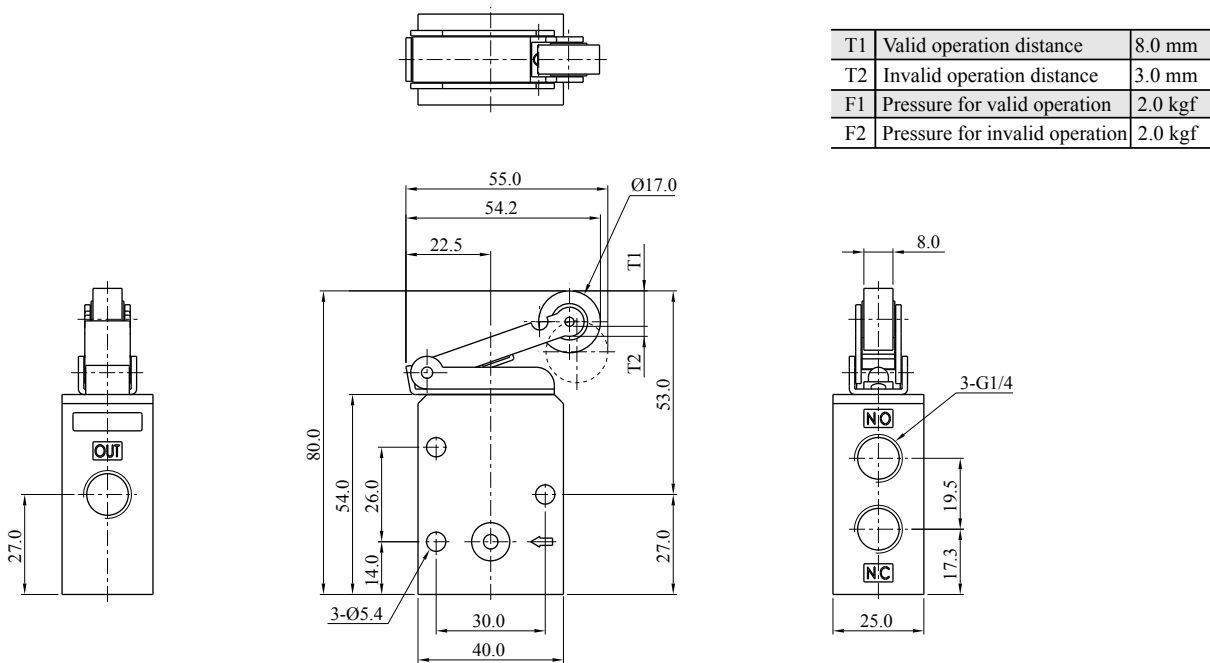


3通机械阀 3-Port Mechanical Valve
Series KVM230
外形尺寸图 Dimensions (mm)

单向滚轮杠杆 One-way Roller Lever
KVM 230-02-02/KVM230-02-02S

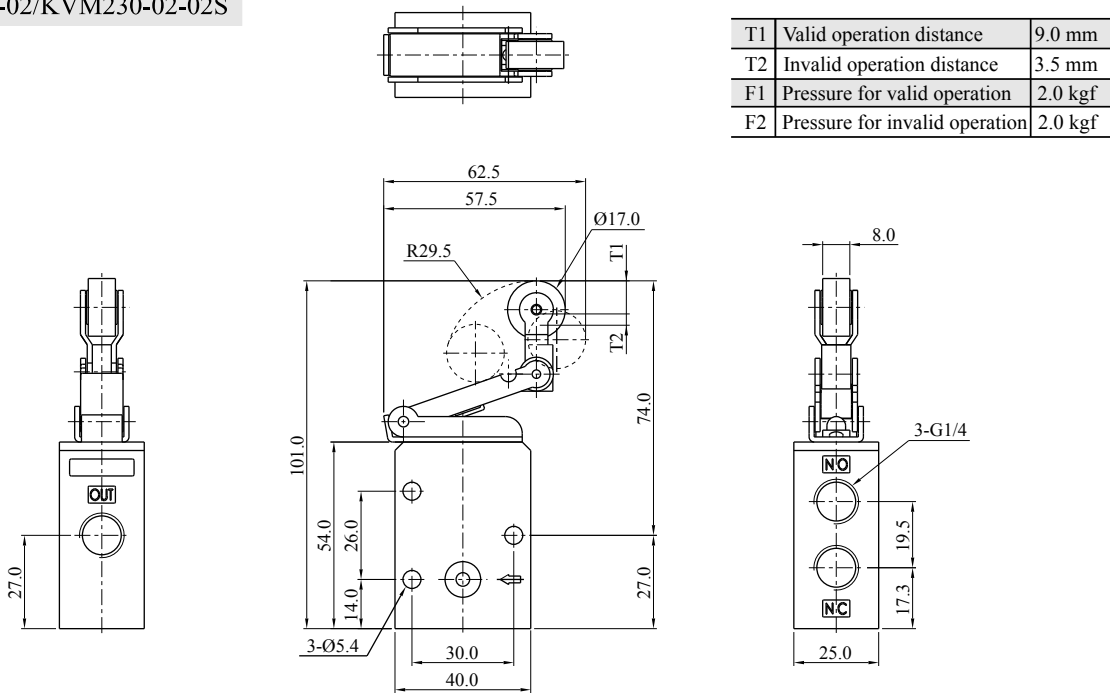


按钮（蘑菇型） Push Button (Mushroom)
KVM 230-02-30

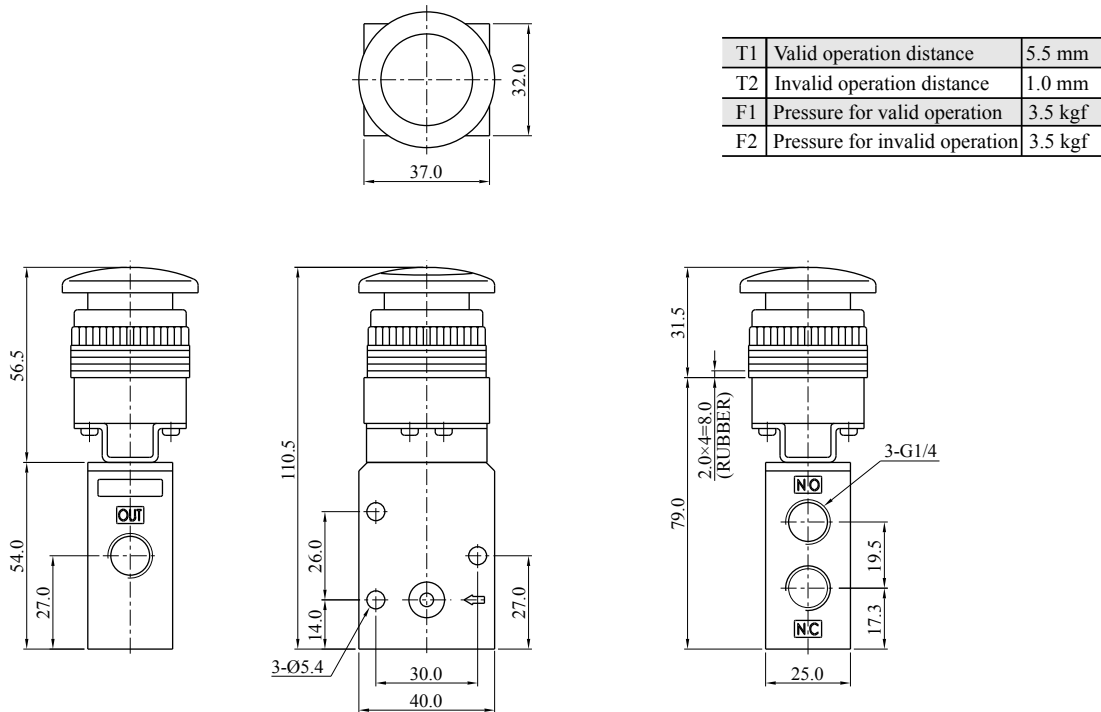


3通机械阀 3-Port Mechanical Valve Series KVM230 外形尺寸图 Dimensions (mm)

按钮（平型） Push Button (Flash)

KVM 230-02-33

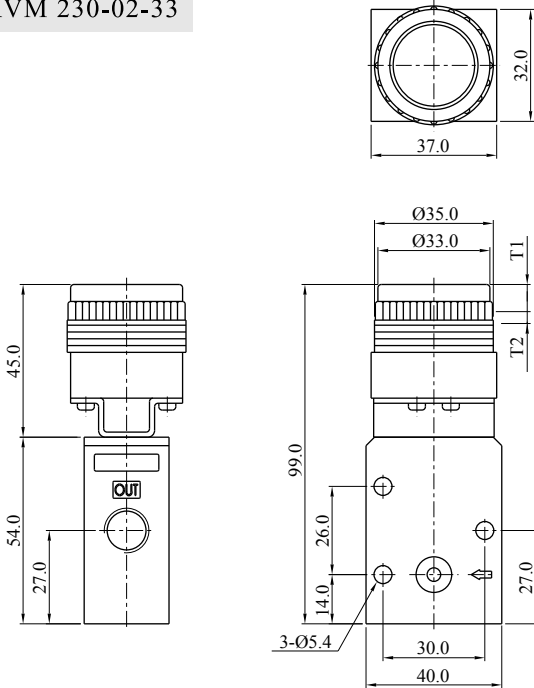


T1	Valid operation distance	5.5 mm
T2	Invalid operation distance	1.0 mm
F1	Pressure for valid operation	3.5 kgf
F2	Pressure for invalid operation	3.5 kgf

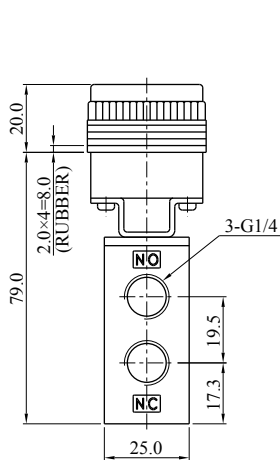

旋转旋转（2位） Selector (2-Position)

KVM 230-02-34



T1	Valid operation distance	5.5 mm
T2	Invalid operation distance	1.0 mm
F1	Pressure for valid operation	3.5 kgf
F2	Pressure for invalid operation	3.5 kgf

