

## 3通先导型电磁阀 3-Port Pilot Operated Solenoid Valve Series KVP342



KVP342-□D




KVP342-□DZ

### 规格 Specifications

型号	Model	KVP342
接管口径	Port Size	PT1/4"
使用流体	Fluid	洁净空气 Clean Air
工作压力范围	Operating Pressure Range (MPa)	0.15~1.0
有效截面积	Effective Sectional Area (mm <sup>2</sup> )	19.0
环境及流体温度	Ambient & Fluid Temp.	5~60°C
响应时间	Response Time(5bar)	≤25ms
最大操作频率	Max.Working Frequency	5c/sec
*润滑	Lubrication	不需要 Not Required
手动方式	Manual Override	无锁定按钮式(标准) Push Button (Standard) 旋转锁定式(可选) Lever Lock (Option)
频率/标准电压	Frequency/Rated Voltage	AC110, AC220 (50/60Hz) / DC12V, DC24V
容许电压波动范围	Permissible Voltage Variation	标准电压的±10% ±10% of Rated Voltage
绝缘种类	Coil Insulation Class	F级或相同等级 Class F or Equivalent
功率消耗	Power Consumption	AC 持续 Holding 5.5VA (50/60Hz)
		DC 2.5W

\* 若需要润滑请用透平1号油ISOVG32  
Use Turbine Oil 1st-grade ISOVG32, if necessary.

### 型号表示方法 How To Order

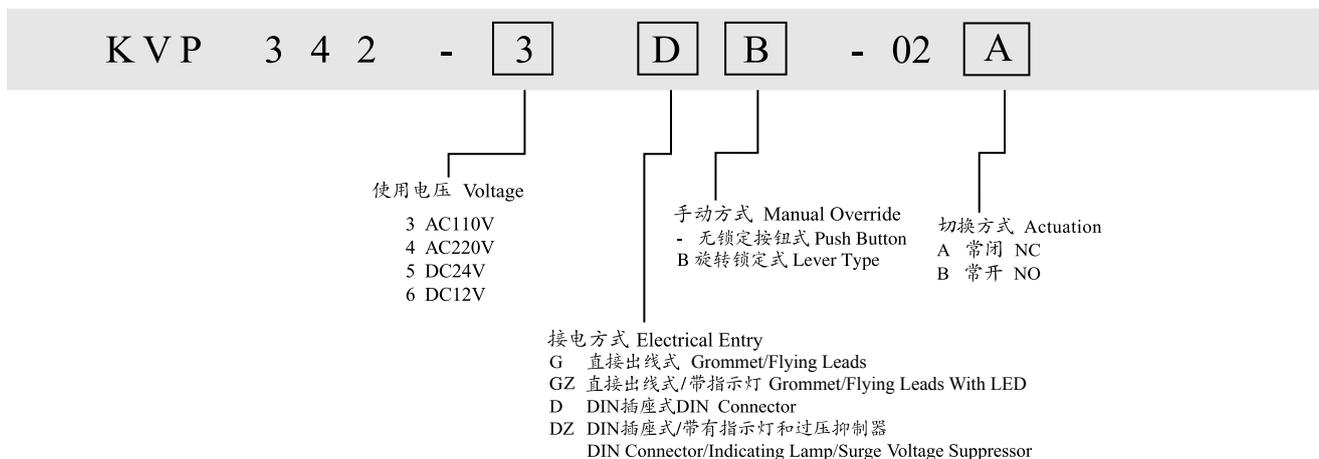



# 汇流板 Manifold Series KVP300


## 规格 Manifold Specifications

型号	Model	KVP300
接管口径	Port Size	PT1/4"
使用流体	Fluid	洁净空气 Clean Air
工作压力范围	Operating Pressure Range (MPa)	0.15~1.0
位置数	Stations	2~10

## 汇流板外形尺寸图 Manifold Dimensions (mm)

DIN 插座式

DIN Connector Type

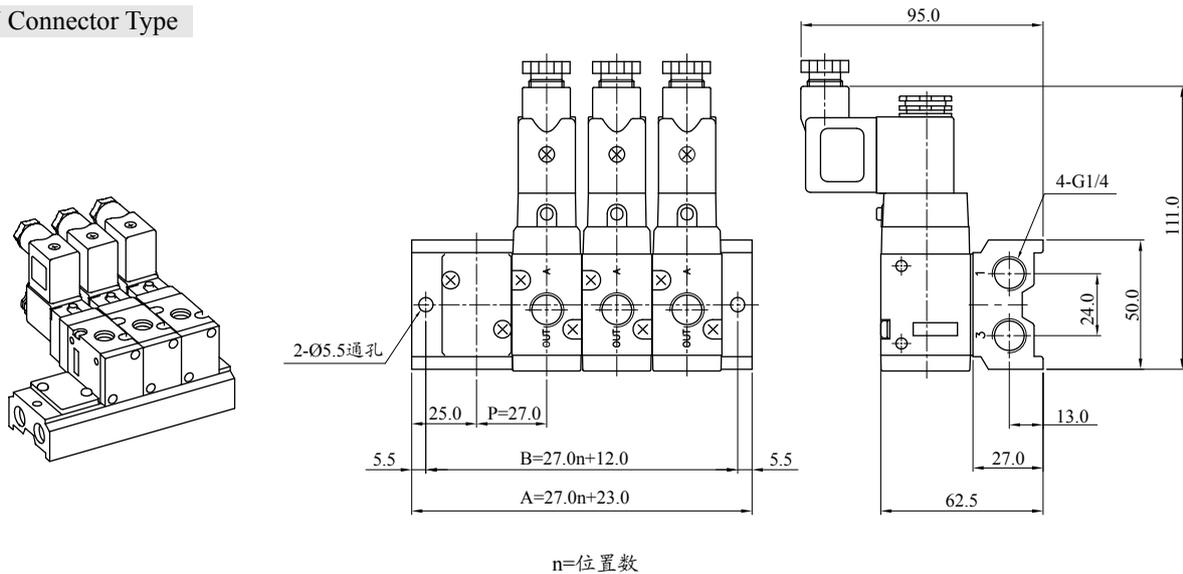

位置数	2	3	4	5	6	7	8	9	10
A	77.0	104.0	131.0	158.0	185.0	212.0	239.0	266.0	293.0
B	66.0	93.0	120.0	147.0	174.0	201.0	228.0	255.0	282.0

## 型号表示方法 How to Order

