


5通先导型电磁阀
5-Port Pilot Operated
Solenoid Valve
Series KVZ3000




规格 Specifications

型号	Model	KVZ3120	KVZ3220	KVZ3320	KVZ3420	KVZ3520
接管口径	Port Size	M5				
使用流体	Fluid	洁净空气 Clean Air				
工作压力范围	Operating Pressure Range (MPa)	0.15~1.0		0.2~1.0		
有效截面积	Effective Sectional Area (mm²)	3.6		3.0		
环境及流体温度	Ambient & Fluid Temp.	5~60℃				
响应时间	Response Time(5bar)	≤25ms		≤35ms		
最大操作频率	Max.Working Frequency	5c/sec		3c/sec		
*润滑	Lubrication	不需要 Not Required				
手动方式	Manual Override	无锁定按钮式(标准) Push Button (Standard) 旋转锁定式(可选) Lever Lock (Option)				
频率/标准电压	Frequency / Reated Voltage	AC110, AC220 (50/60Hz) / DC12V, DC24V				
容许电压波动范围	Permissible Voltage Variation	额定电压的±10% ±10% of Rated Voltage				
绝缘种类	Coil Insulation Class	F级或相同等级 Class F or Equivalent				
功率消耗	Power Consumption	AC	持续 Holding 3.5VA (50/60Hz)			
		DC	2.5W			

* 若需要润滑请用透平1号油ISOVG32
Use Turbine Oil 1st-grade ISOVG32, if necessary.


型号表示方法 How To Order

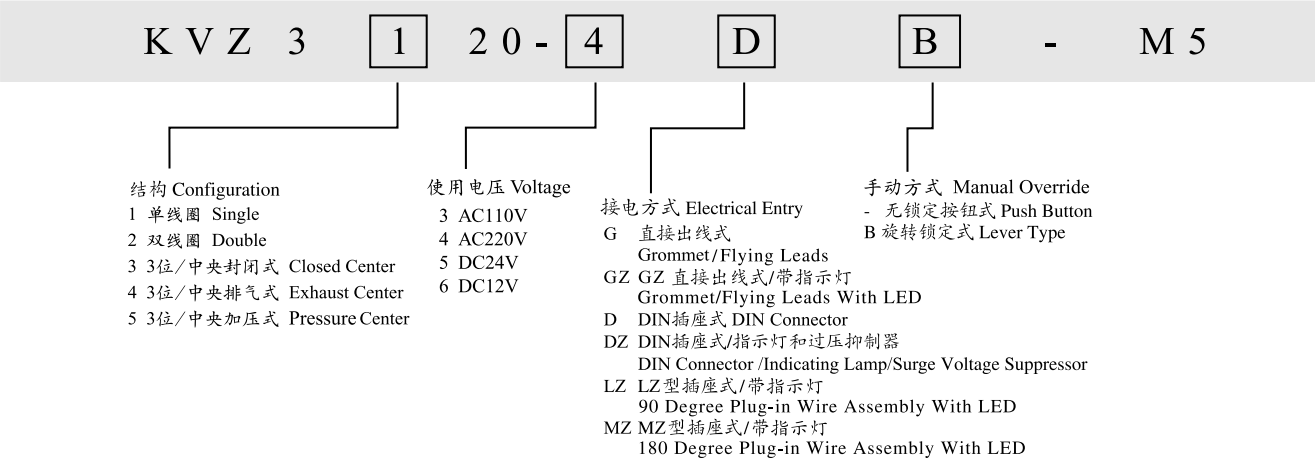


5通先导型电磁阀 5-Port Pilot Operated Solenoid Valve
Series KVZ3000
外形尺寸图 Dimensions (mm)

直接出线式/带指示灯 (Grommet Type / With LED)

KVZ3120-□GZ-M5

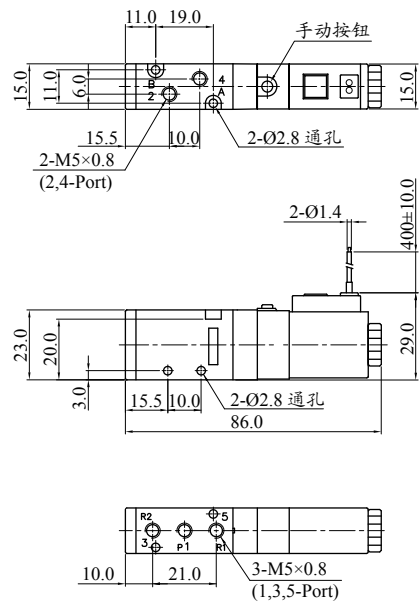


KVZ3220-□GZ-M5

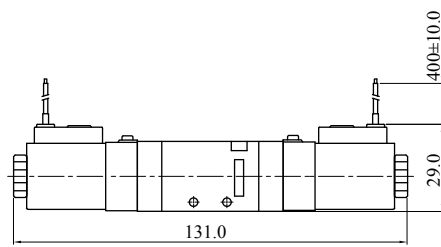

KVZ3320-□GZ-M5


4
5

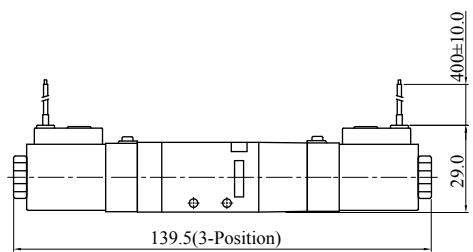


5通先导型电磁阀 5-Port Pilot Operated Solenoid Valve Series KVZ3000 外形尺寸图 Dimensions (mm)

DIN型插座式 (DIN Connector Type)


KVZ 3120-□D-M5

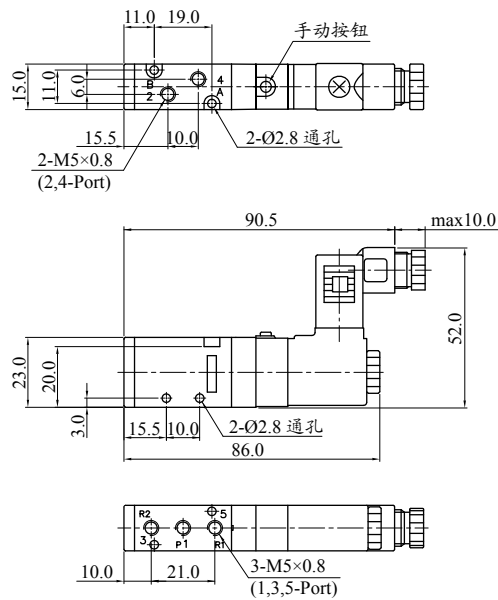

KVZ 3220-□D-M5

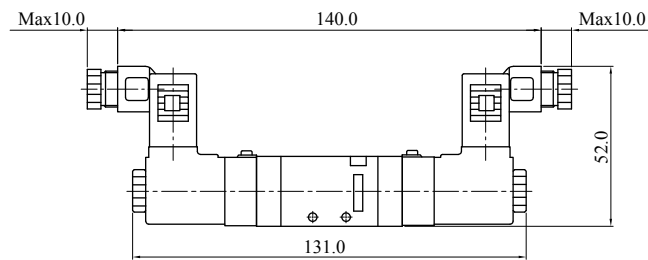


KVZ3320-□D-M5
4
5

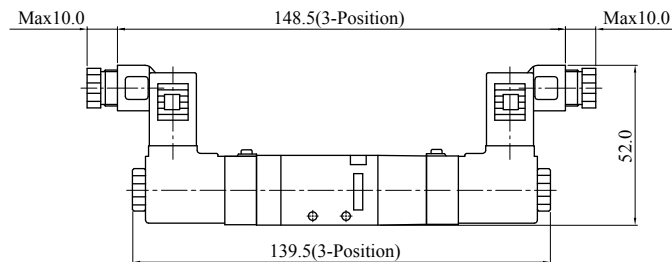


5通先导型电磁阀 5-Port Pilot Operated Solenoid Valve
Series KVZ3000
外形尺寸图 Dimensions (mm)


LZ 型插座式(LZ Plug Connector Type)
KVZ3120-□LZ-M5

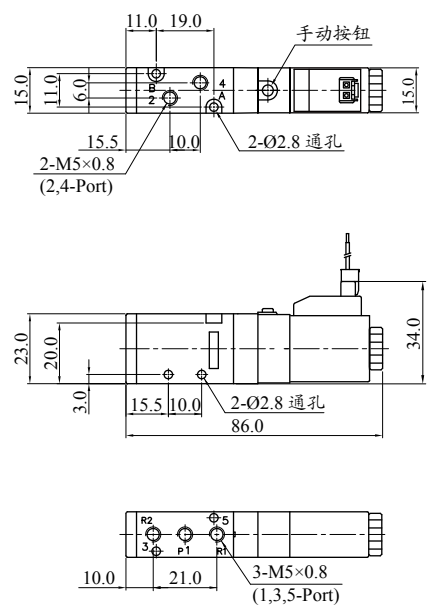

KVZ3220-□LZ-M5

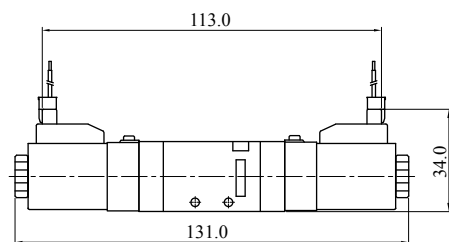


KVZ3320-□LZ-M5
4
5

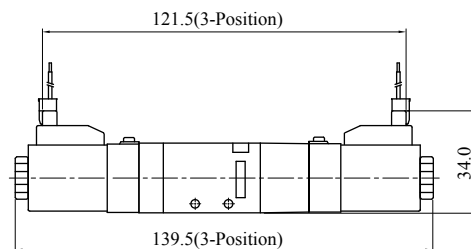


5通先导型电磁阀 5-Port Pilot Operated Solenoid Valve
Series KVZ3000
外形尺寸图 Dimensions (mm)

MZ型插座式(MZ Plug Connector Type)

KVZ3120-□ MZ-M5

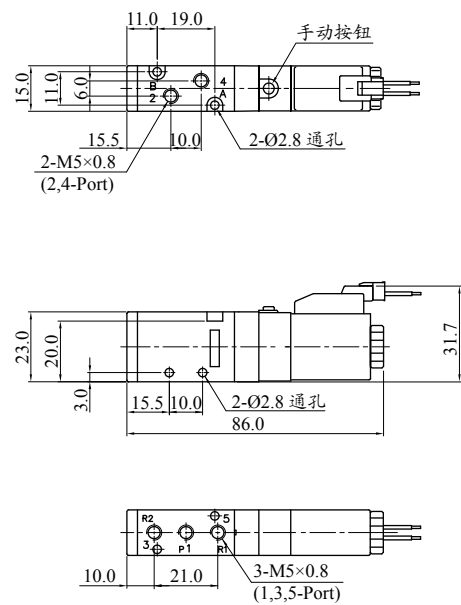


KVZ3220-□ MZ-M5

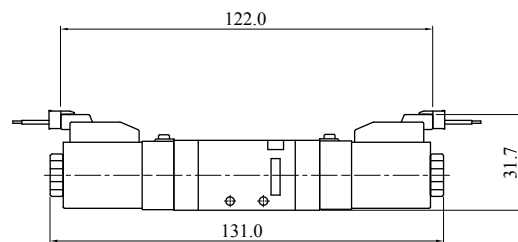

KVZ3320-□ MZ-M5

4
5

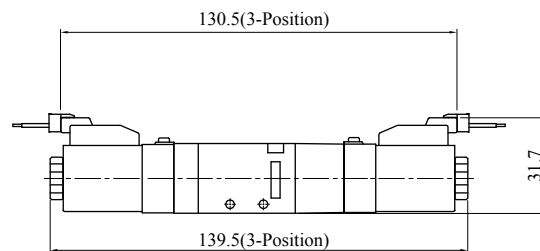

汇流板 Manifold

Series KVZ3000


规格 Manifold Specifications

型号	Model	KVZ3000
接管口径	Port Size	PT1/8"
使用流体	Fluid	洁净空气 Clean Air
工作压力范围	Operating Pressure Range (MPa)	0.15~1.0
位置数	Stations	2~10

汇流板外形尺寸图 Manifold Dimensions (mm)

DIN 插座式

DIN Connector Type

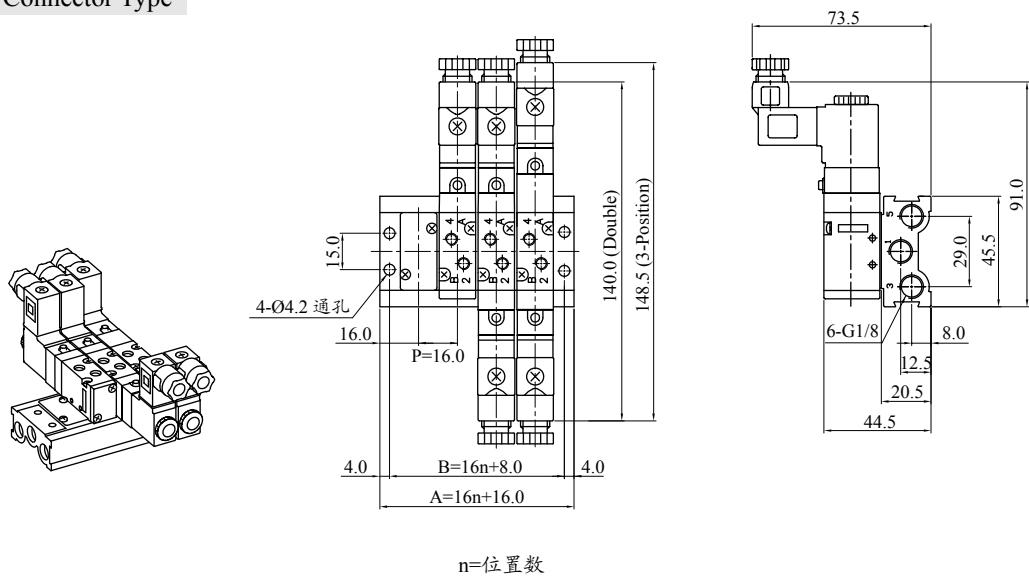

位置数	2	3	4	5	6	7	8	9	10
A	48.0	64.0	80.0	96.0	112.0	128.0	144.0	160.0	176.0
B	40.0	56.0	72.0	88.0	104.0	120.0	136.0	152.0	168.0

型号表示方法 How to Order

KVZ

3000

-

M5

-

B2

适用电磁阀 Applicable Solenoid Valve

Series KVZ3000

汇流板位置数 No. of Stations

M2	2
M4	4
...	...
M10	10

盲板数量 No. of Blank Plates

-	无 None
B1	1
B2	2
B3	3
...	...