


5通机械阀  
5-Port Mechanical Valve  
Series KVZM550



KVZM550-01-00

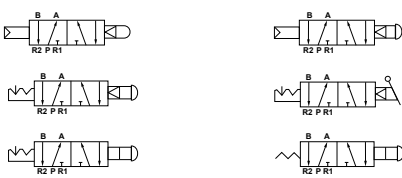

KVZM550-01-01



KVZM550-01-33



KVZM550-01-30



KVZM550-01-34

规格 Specifications

|         |                                |                 |
|---------|--------------------------------|-----------------|
| 型号      | Model                          | KVZM550         |
| 接管口径    | Port Size                      | PT1/8"          |
| 使用流体    | Fluid                          | 洁净空气 Clean Air  |
| 工作压力范围  | Operating Pressure Range (MPa) | 0~0.8           |
| 有效截面积   | Effective Sectional Area (mm²) | 12.6            |
| 环境及流体温度 | Ambient & Fluid Temp.          | 5~60°C          |
| * 润滑    | Lubrication                    | 不需要Not Required |

\* 若需要润滑请用透平1号油ISOVG32  
Use Turbine Oil 1st-grade ISOVG32, if necessary.

型号表示方法 How To Order

KVZM550-01-01


接管口径  
01 1/8"

驱动机构 Actuator  
00 基本 Basic  
01 滚轮杠杆 Roller Lever  
01-S 硬钢滚轮杠杆 Bearing Steel Roller Lever  
30 按钮（蘑菇型） Push Button (Mushroom)  
33 按钮（平型） Push Button (Flat)  
34 旋转选择（2位） Selector (2-Position)

# 5通机械阀 5-Port Mechanical Valve Series KVZM550 外形尺寸图 Dimensions (mm)


基本 Basic

KVZM 550-01-00

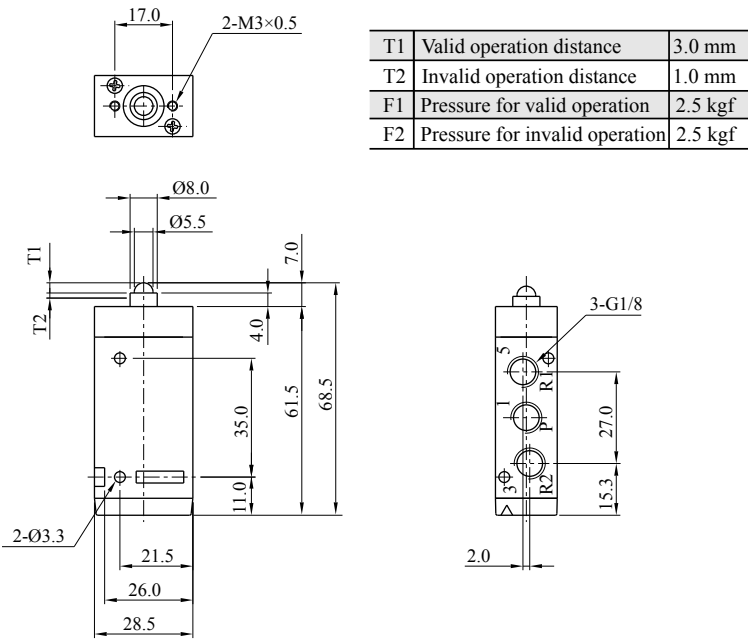

滚轮杠杆 Roller Lever


KVZM 550-01-01/ KVZM550-01-01S

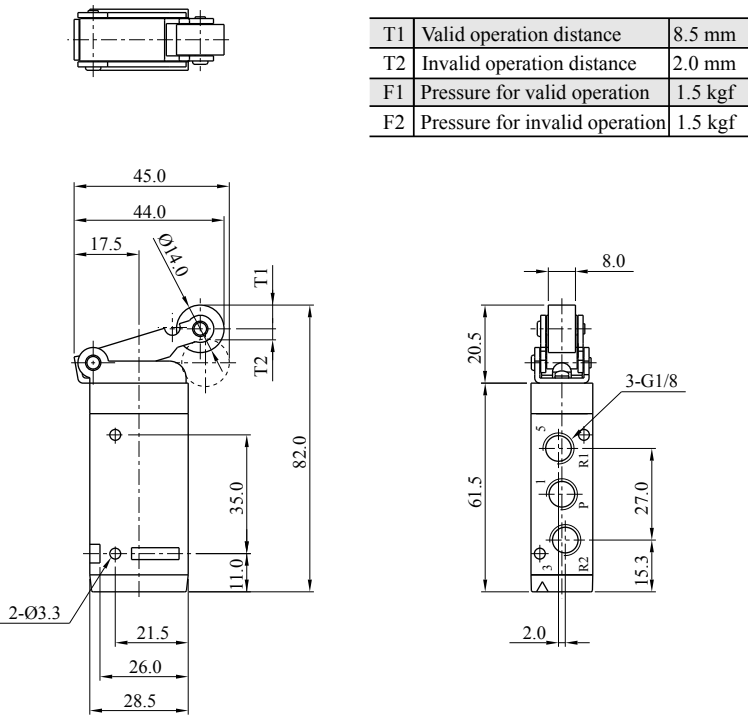

5通机械阀 5-Port Mechanical Valve  
Series KVZM550  
外形尺寸图 Dimensions (mm)


按钮（蘑菇型） Push Button (Mushroom)

KVZM 550-01-30

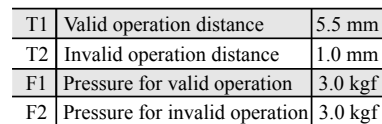


按钮（平型） Push Button (Flash)

KVZM 550-01-33

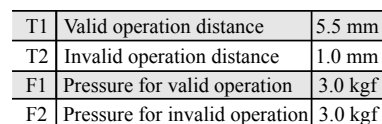

5通机械阀 5-Port Mechanical Valve  
Series KVZM550  
外形尺寸图 Dimensions (mm)

旋转旋转（2位） Selector (2-Position)  
KVZM 550-01-34



|    |                                |         |
|----|--------------------------------|---------|
| T1 | Valid operation distance       | 5.0 mm  |
| T2 | Invalid operation distance     | 1.0 mm  |
| F1 | Pressure for valid operation   | 3.0 kgf |
| F2 | Pressure for invalid operation | 3.0 kgf |

