


ARK

先导型零压差启动式2通电磁阀 2-Port Zero Differential Pressure Pilot operated Solenoid Valve Series KWK□□XC



规格 Specifications

使用流体 Fluids	空气, 水, 热水, 瓦斯, 轻油等 Air, water, hot water, gas, light oil, etc.
动作方式 Operation	先导零压差启动式 Pilot operated/ Zero differential pressure
形式 Structure	常闭 N.C., 常开 N.O.
接管口径 Port size	G3/8~G2
动作压力范围 Operating pressure range	0~1.0 MPa
阀体材质 Body material	锻铜, 不锈钢SS304 Brass, stainless steel SS304
密封材质 Seal material	丁晴橡胶 NBR, 氟橡胶 VITON, 乙丙橡胶 EPDM
环境温度 Ambient temperature	0~65°C
流体温度 Fluid temperature	0~80°C (丁晴橡胶 NBR), 0~120°C (氟橡胶 VITON) 0~130°C (乙丙橡胶 EPDM)
标准电压 Rated voltage	AC24V, AC110V, AC220V, DC12V, DC24V ±10%允许波动 Permissible variation
安装方式 Mounting	任意 (在动作压力差范围内) Free (within operating pressure difference)


常闭型 Normally Closed

型号 Model	接管口径 Port size	通孔直径 Orifice (mm)	Cv	最低动作压力差 Min. operating pressure difference (MPa)	最高动作压力差 Max. operating pressure difference (MPa)						功率 Power	
					空气 Air		水 Water		轻油 Light oil ≤20 CST)		VA	W
					AC	DC	AC	DC	AC	DC	AC	DC
KWK-10XC-16	G3/8	16	4.8	0	1	0.6	1	0.6	0.7	0.4	33	20
KWK-15XC-16	G1/2	16	4.8	0	1	0.6	1	0.6	0.7	0.4	33	20
KWK-20XC-20	G3/4	20	7.6	0	1	0.6	1	0.6	0.7	0.4	33	20
KWK-25XC-25	G1	25	12	0	1	0.6	1	0.6	0.7	0.4	33	20
KWK-32XC-32	G1 1/4	32	24	0	1	0.6	1	0.6	0.7	0.4	57	45
KWK-40XC-40	G1 1/2	40	29	0	1	0.6	1	0.6	0.7	0.4	57	45
KWK-50XC-50	G2	50	48	0	1	0.6	1	0.6	0.7	0.4	57	45

常开型 Normally Open

型号 Model	接管口径 Port size	通孔直径 Orifice (mm)	Cv	最低动作压力差 Min. operating pressure difference (MPa)	最高动作压力差 Max. operating pressure difference (MPa)						功率 Power	
					空气 Air		水 Water		轻油 Light oil ≤20 CST)		VA	W
					AC	DC	AC	DC	AC	DC	AC	DC
KWK-10XC-16-□-NO	G3/8	16	4.8	0	0.5	0.5	0.5	0.5	0.3	0.3	33	20
KWK-15XC-16-□-NO	G1/2	16	4.8	0	0.5	0.5	0.5	0.5	0.3	0.3	33	20
KWK-20XC-20-□-NO	G3/4	20	7.6	0	0.5	0.5	0.5	0.5	0.3	0.3	33	20
KWK-25XC-25-□-NO	G1	25	12	0	0.5	0.5	0.5	0.5	0.3	0.3	33	20
KWK-32XC-32-□-NO	G1 1/4	32	24	0	0.5	0.5	0.5	0.5	0.3	0.3	70	55
KWK-40XC-40-□-NO	G1 1/2	40	29	0	0.5	0.5	0.5	0.5	0.3	0.3	70	55
KWK-50XC-50-□-NO	G2	50	48	0	0.5	0.5	0.5	0.5	0.3	0.3	70	55

型号表示方法 How To Order

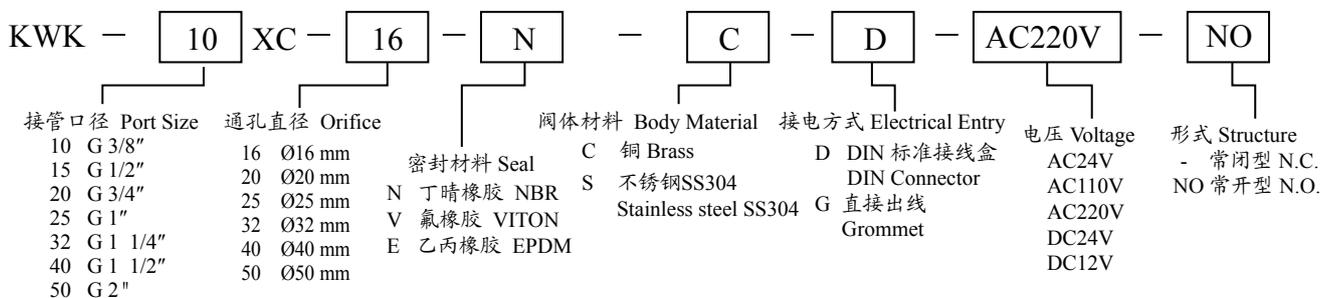


先导型零压差启动式2通电磁阀

2-Port Zero Differential Pressure Pilot operated Solenoid Valve


Series KWK□□XC

外形尺寸图 Dimensions (mm)

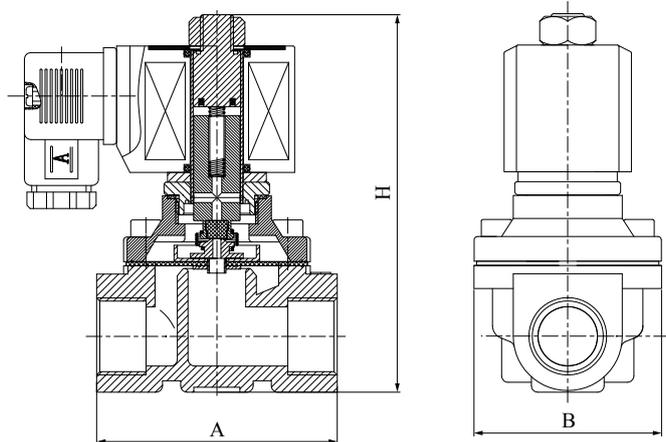

常闭型 Normally Closed

型号 Model	接管 口径 Port size	A	B	H
KWK-10XC-16	G3/8	69	57	106
KWK-15XC-16	G1/2	69	57	106
KWK-20XC-20	G3/4	73	57	114
KWK-25XC-25	G1	99	77.5	121
KWK-32XC-32	G1 1/4	112	86.5	150
KWK-40XC-40	G1 1/2	123	94	160
KWK-50XC-50	G2	168	123	183

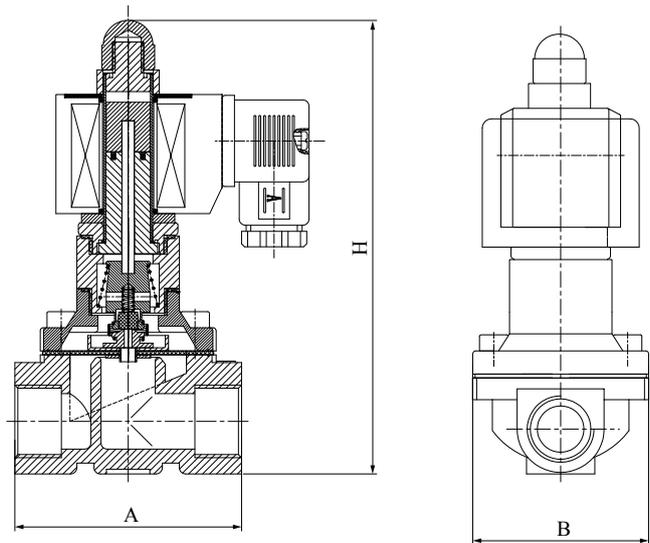

常开型 Normally Open

型号 Model	接管 口径 Port size	A	B	H
KWK-10XC-16-□-NO	G3/8	69	57	135
KWK-15XC-16-□-NO	G1/2	69	57	135
KWK-20XC-20-□-NO	G3/4	73	57	142
KWK-25XC-25-□-NO	G1	99	77.5	150
KWK-32XC-32-□-NO	G1 1/4	112	86.5	180
KWK-40XC-40-□-NO	G1 1/2	123	94	190
KWK-50XC-50-□-NO	G2	168	123	216