

SCROLL A



Mobility

SCROLL A is a self-closing rigid tube designed for wire routing and cables protection. SCROLL A also provides an open scroll shape for an easy installation.



- Compression resistance
- Wire Routing and Protection
- Open scroll shape for an easy installation



- **Product family:**
Hard Smooth Tubing
- **Construction:**
Self-closing rigid tube
- **Materials:**
Rigid PVC



Environments


- Interior
- Cooling System
- Brake Line,
- HVAC (*Heating, Ventilation and Air-Conditioning*)

PHYSICAL PROPERTIES

Properties	Test Method	Result
Standard colors without stripe	-	Black
Long term aging (3000h)	-	85°C
Short term aging (240h)	-	105°C
Overlap (Covering)	-	7.5% (27.2°)
Hardness	ASTM D2240	76-79 shore D
Flammability	ISO 3795	self-extinguishing

DIMENSIONS

Designation	ID	Thickness (T)	Gap (G)	Covering (C) %
	(mm)			
SCROLL A 07	7	0.5	1.5	7.5 (27.2°)
SCROLL A 09	9	0.5	1.5	7.5 (27.2°)
SCROLL A 07	7	0.7	1.5	7.5 (27.2°)
SCROLL A 09	9	0.7	1.5	7.5 (27.2°)
SCROLL A 11	11	0.7	1.5	7.5 (27.2°)
SCROLL A 12	12	0.7	1.5	7.5 (27.2°)
SCROLL A 13	13	0.7	1.5	7.5 (27.2°)
SCROLL A 14	14	0.7	1.5	7.5 (27.2°)
SCROLL A 15	15	0.7	1.5	7.5 (27.2°)
SCROLL A 17	17	0.7	1.5	7.5 (27.2°)
SCROLL A 22	22	0.7	1.5	7.5 (27.2°)
SCROLL A 26	26	0.7	1.5	7.5 (27.2°)
SCROLL A 30	30	0.7	1.5	7.5 (27.2°)

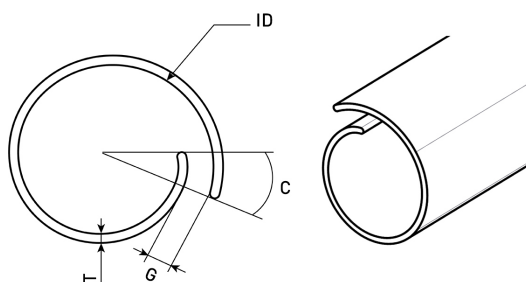

PACKAGING

Minimum cut lengths from 35 mm
(Other lengths upon request only)