

LANGOFLEX DP-S



Mobility

Langoflex DP-S is a braided sleeve designed to protect cables exposed to high levels of abrasion. This product is expandable and easy to install and has a standard density construction.



- Mechanical & Abrasion protection
- Standard construction
- High abrasion resistance




- **Product family:**
Expandable Sleeving
- **Construction:**
Braided
- **Materials:**
PET duo monofilament



Environments

- Interior
- Engine
- HEV/EV
- Battery
- Cooling System
- HVAC
- Brake
- Fuel

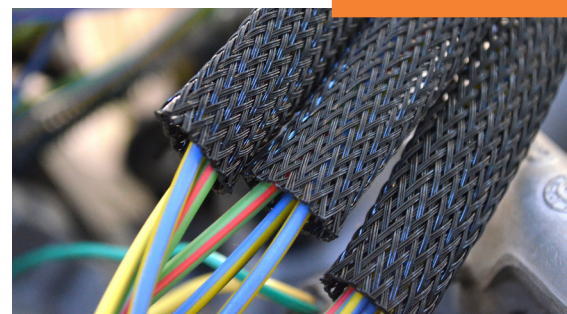


PHYSICAL PROPERTIES

Properties	Test Method	Result
Standard colors without stripe	-	Black
Long term aging (3000h)	-	150°C
Short term aging (240h)	-	175°C
Abrasion resistance	GMW 14327	Category 5
Flammability	FMVSS 302	0 mm/min

DIMENSIONS

Designation	Nominal A Ø (mm)	Maximum B Ø (mm)
LANGOFLEX DP-S 03	3	6
LANGOFLEX DP-S 06	6	11
LANGOFLEX DP-S 08	8	13
LANGOFLEX DP-S 10	10	13
LANGOFLEX DP-S 13	13	19
LANGOFLEX DP-S 16	16	25
LANGOFLEX DP-S 19	19	32
LANGOFLEX DP-S 22	22	41
LANGOFLEX DP-S 25	25	48
LANGOFLEX DP-S 32	32	57
LANGOFLEX DP-S 38	38	57
LANGOFLEX DP-S 44	44	70
LANGOFLEX DP-S 50	50	76
LANGOFLEX DP-S 63	63	76
LANGOFLEX DP-S 76	76	-

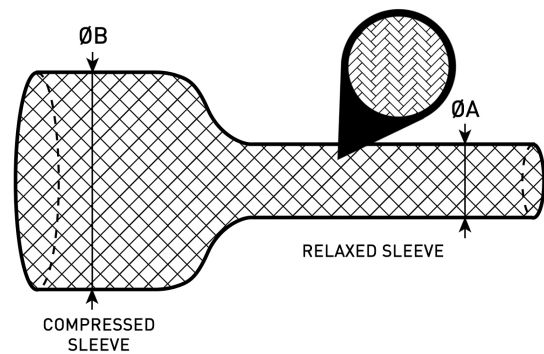

DELFINEN_LANGOFLEX DP-S_EN_v4.0

Data and photos for information only. Delfingen makes no warranties as to the accuracy or completeness of this information. Delfingen reserves the right to make changes in materials or processing without notifications.

PACKAGING

Coils
Cut lengths upon request