

# EXPANDABLE SLEEVING



## LANGOFLEX G



Mobility

Langoflex G is a braided sleeve designed to protect cables exposed to medium levels of abrasion. This product is expandable and easy to install and has standard density construction.



- Mechanical & Abrasion protection
- Medium abrasion resistance



- **Product family:** Expandable Sleeving
- **Construction:** Braided
- **Materials:** PET .010" (0.25 mm) monofilament



**Environments**

- Interior
- Engine
- HEV/EV
- Battery
- Cooling System
- HVAC
- Brake
- Fuel




## PHYSICAL PROPERTIES

Properties	Test Method	Result
Standard colors without stripe	-	Black, orange
Long term aging (3000h)	-	150°C
Short term aging (240h)	-	175°C
Abrasion resistance	GMW 14327	Category 4
Flammability	SAE J 369	self-extinguishing

Other colors or stripe upon request

## DIMENSIONS

Designation	Nominal A Ø (mm)	Maximum B Ø (mm)
LANGOFLEX G 03	3	7
LANGOFLEX G 06	6	9
LANGOFLEX G 06	6	10
LANGOFLEX G 08	8	14
LANGOFLEX G 10	10	16
LANGOFLEX G 13	13	20
LANGOFLEX G 19	19	34
LANGOFLEX G 25	25	38
LANGOFLEX G 32	32	44
LANGOFLEX G 44	44	63
LANGOFLEX G 50	50	70

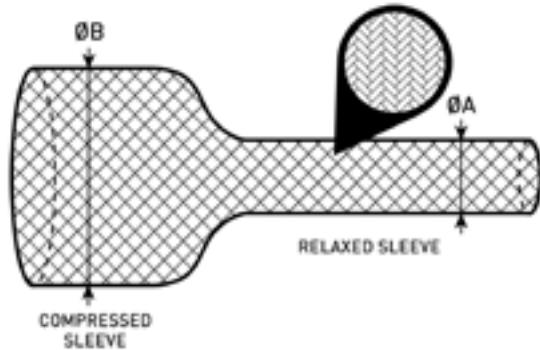

DELFINGEN\_LANGOFLEX\_G\_EN\_v4.1

Data and photos for information only. Delfingen makes no warranties as to the accuracy or completeness of this information. Delfingen reserves the right to make changes in materials or processing without notifications.

## PACKAGING

Coils  
Cut lengths upon request