



**Submersible Pump
Filter Equipment
Submersible Light
Transformer**

中山市天伟电机电器有限公司

ZHONG SHAN SKYISH ELECTROMOTOR & ELECTRICAL APPLIANCE CO.,LTD

中国广东省中山市小榄镇工业大道北48号

NO.48 INDUSTRY ROAD(NORTH), XIAOLAN TOWN, ZHONGSHAN, GUANGDONG 528415, CHINA

TEL: +86 760-28183088

FAX: +86 760-22239900

HTTP:// www.skyish-zs.com

E-MAIL: Jack@skyish-zs.com

 **SKYISH**[®]
天伟电机电器

致力于水族类泵业的领航者

To focus on the leader of the aquatic life Pump

Zhongshan Skyish Electromotor & Electrical Appliance Co. Ltd. is specialized in manufacturing various water gardening products like submersible pumps, handicraft pumps, water treatment systems and aquarium products. Rich experiences, advanced equipments, strong technical forces, excellent management team, well-trained workers, strict operation standards and advanced testing machines with high-efficient automatic production lines. Professional production technology makes high quality products. All products are authenticated with GS, UL, BS, CE, SAA and CUL certificate. Skyish products are well-sold globally.

“Quality” is the base of our company, creation and innovation is guidance, customer satisfaction is our goal. Skyish is trying the best to make continuous improvements and want to provide you the best product!

中山市天伟电机电器有限公司，是一家专业生产各式潜水泵、工艺品水泵、水处理系统等花园类产品及水族类器材的厂家。经验丰富，设备先进，技术力量雄厚，现代化的管理模式；优秀的管理队伍，受专业培训的作业人员，严谨的工艺规范，先进的检测仪器，高效率的自动化生产线，专业的生产技术，造就优质的产品。公司产品已通过欧盟GS/CE/EMC、英国BS、美国加拿大UL/CUL、澳洲SAA等主要经济体国家或地区的安规认证！公司产品不仅畅销国内市场，同时也大量出口到世界各地，受到顾客们的高度支持和赞扬。

天伟以追求质量为本，发展创新，并以满足客户需求为服务宗旨。我们会竭尽所能与全世界的客户共同合作，共同进步，共同创造美好未来。




Illumifalls

Easy to install and maintain

Lighted Spillway with energy efficient Blue LED Lights

Intricately hand woven, weather-proof wicker won't fade or crack

Elevated, non-aquatic planting area

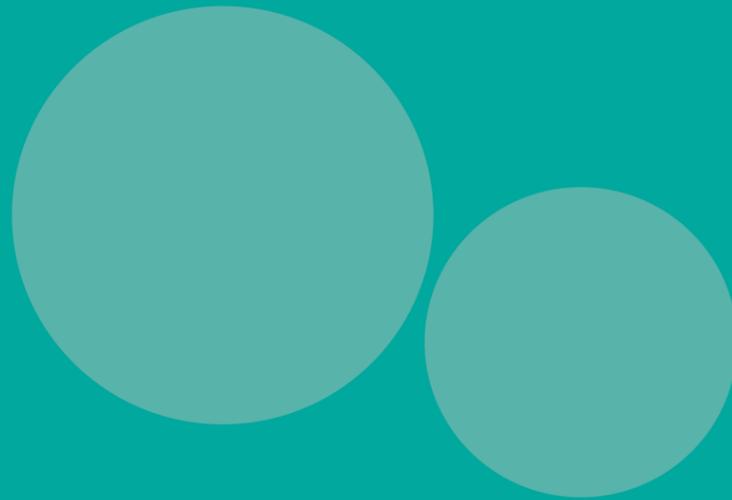

现代的手织藤条和光滑,酷银色的铝架可以搭配任何露台。蓝色或白色LED灯,照亮瀑布流水,给您的露台增添一份美丽的夜间效果。顶部的植物种植区域可以种植任何植物或放置任何装饰性的物品。

Contemporary hand woven hazelnut wicker with a smooth, cool aluminum ledge will compliment any patio. LED lights, in blue or white, illuminate the spillway for a beautiful nighttime effect. The elevated planting area allows for customization with plants, or any decorative material.



Model 型号	SC2-111-77-PW
Dimension(mm) 尺寸	1110*775*636mm
Colour of LED Light 灯光颜色	白色 (White)、蓝色(Blue)
Clour of Product 产品颜色	棕色 (Brown)、灰色(Grey)
Supply Voltage 工作电压	120V/220-240V/12V/50Hz/60Hz



现代的手织藤条和光滑, 酷银色的铝架可以搭配任何露台。易于安装和维护。您可以尽情享受这款漂亮水池所发出的令人放松的声音, 它也是一款漂亮的户外装饰品。

Contemporary hand woven hazelnut wicker with a smooth, cool aluminum ledge will compliment any patio. Easy to install and maintain. You can enjoy the relaxing sounds of this beautiful patio pond as it compliments your outdoor decor.

Model 型号	SC1-77-77-PW
Dimension(mm) 尺寸	775*775*368mm
Colour of LED Light 灯光颜色	白色 (White)、蓝色(Blue)
Clour of Product 产品颜色	棕色 (Brown)、灰色(Grey)
Supply Voltage 工作电压	120V/220-240V/12V/50Hz/60Hz



天然棕草, 黑色涂层铁架和带灯的喷泉让您的户外空间充满生机。棕草垫给您的喷泉提供了一个种植面积的框架。喷泉提供两种喷头选择以及一个LED照明灯圈, 给您的户外空间增添一种漂亮的夜间效果。

Natural coco fiber, black powder coated steel and an illuminated water feature will bring your outdoor space to life. The coco fiber mat provides a planting area that frames the fountain. The fountain features two nozzle options with an illuminating LED light ring for a beautiful nighttime effect.

Model 型号	HP-79-36-PW
Dimension(mm) 尺寸	Φ787*104mm
Colour of LED Light 灯光颜色	白色 (White)、蓝色(Blue)
Clour of Product 产品颜色	棕色 (Brown)、灰色(Grey)
Supply Voltage 工作电压	120V/220-240V/12V/50Hz/60Hz



天然棕草，黑色涂层铁架和带灯的喷泉让您的户外空间充满生机。棕草垫给您的喷泉提供了一个种植面积的框架。喷泉提供两种喷头选择以及一个LED照明灯圈，给您的户外空间增添一种漂亮的夜间效果。

Natural coco fiber, black powder coated steel and an illuminated water feature will bring your outdoor space to life. The coco fiber mat provides a planting area that frames the fountain. The fountain features two nozzle options with an illuminating LED light ring for a beautiful nighttime effect.

Model 型号

HP-56-30-PW

Dimension(mm) 尺寸

Φ560*673mm

Colour of LED Light 灯光颜色

白色 (White)、蓝色(Blue)

Clour of Product 产品颜色

黑色加棕色 (Black & Brown)

Supply Voltage 工作电压

120V/220-240V/12V/50Hz/60Hz



天然棕草，黑色涂层铁架和带灯的喷泉让您的户外空间充满生机。棕草垫给您的喷泉提供了一个种植面积的框架。喷泉提供两种喷头选择以及一个LED照明灯圈，给您的户外空间增添一种漂亮的夜间效果。

Natural coco fiber, black powder coated steel and an illuminated water feature will bring your outdoor space to life. The coco fiber mat provides a planting area that frames the fountain. The fountain features two nozzle options with an illuminating LED light ring for a beautiful nighttime effect.

Model 型号

HP-56-56-BW

Dimension(mm) 尺寸

Φ560*468mm

Colour of LED Light 灯光颜色

白色 (White)、蓝色(Blue)

Clour of Product 产品颜色

黑色加棕色 (Black & Brown)

Supply Voltage 工作电压

120V/220-240V/12V/50Hz/60Hz



这款喷泉工艺品可以给您的装饰添加一种经典的感觉。柔和的流水声音加上您所选择的植物让您的后院,露台更加完美。
This planter fountain adds a classic touch to any décor. The gentle sound of water combined with your choice of plants makes this perfect addition to your backyard, patio or deck.

Model 型号 **HP-51-51-QW**

Dimension(mm) 尺寸 **Φ510*318mm**

Colour of LED Light 灯光颜色 白色 (White)、蓝色(Blue)

Clour of Product 产品颜色 灰色(Grey)

Supply Voltage 工作电压 120V/220-240V/12V/50Hz/60Hz



这款圆水池有深沉的、摩卡藤条纹路。复杂的手工编织,不受天气影响,藤条不会褪色或开裂。易于安装和维护。您可以尽情享受这款漂亮水池所发出的令人放松的声音,它也是一款漂亮的户外装饰品。

This patio pond has a rich, Mocha wicker finish. Intricately hand woven, weather proof, wicker won't fade or crack. Easy to install and maintain. You can enjoy the relaxing sounds of this beautiful patio pond as it compliments your outdoor décor.

Model 型号 **SC1-55-55-PB**

Dimension(mm) 尺寸 **Φ500*400mm**

Colour of LED Light 灯光颜色 白色 (White)、蓝色(Blue)

Clour of Product 产品颜色 棕色 (Brown)

Supply Voltage 工作电压 120V/220-240V/12V/50Hz/60Hz



这款喷泉工艺品可以给您的装饰添加一种经典的感觉。柔和的流水声音加上您所选择的植物让您的后院,露台更加完美。
This planter fountain adds a classic touch to any décor. The gentle sound of water combined with your choice of plants makes this perfect addition to your backyard, patio or deck.

Model 型号 SC1-58-58-Q

Dimension(mm) 尺寸 Φ580*230mm

Colour of LED Light 灯光颜色 白色 (White)、蓝色(Blue)

Clour of Product 产品颜色 灰色(Grey)

Supply Voltage 工作电压 120V/220-240V/12V/50Hz/60Hz



这款挂墙藤工艺品可以给任何室内或室外空间带来流水的视觉和听觉感受。手编的藤条,装饰漂亮的石头和植物一起给人一种非常漂亮,自然的感觉。石头纹路的背景墙在晚上会闪闪发光。这款工艺品还可以用作桌面喷泉。

This wall mountable water feature brings the sight and sound of running water to any indoor or outdoor space. Hand woven wicker, decorative stones and plant material come together for a beautiful, natural look. The rock finish wall adds a touch of glittering illumination at night. This water feature can also be used as a tabletop fountain.



Model 型号 SC1-40-30-PW

Dimension(mm) 尺寸 400*300*630mm

Colour of LED Light 灯光颜色 白色 (White)、蓝色(Blue)

Clour of Product 产品颜色 棕色 (Brown)

Supply Voltage 工作电压 120V/220-240V/12V/50Hz/60Hz

FOUNTAIN PUMP

NOISELESS

FLOW ADJUSTABLE RUST-LESS
流量可自由调节、静音、抗腐蚀



TP SERIES
TP 系列

卓越的性能:


- 可通过水泵前部的旋钮调整水流大小的。
- 有良好的防水和绝缘性能。
- 防腐、耐腐、高品质的不锈钢轴，支持咸淡水环境。
- 永磁同步马达，高效率低消耗。
- 外壳为ABS材料，经久耐用之构造，无腐蚀隐患。
- 多种功能：涵盖抽水、过滤、喷洒、增氧等。
- 广泛用于鱼缸、工艺品、假山、喷泉花园等。

Outstanding Features:


- It is able to adjust the water freely by the knob in the front of pump.
- Waterproof and good performance of insulation.
- Anti-friction,rust-less,high-quality stainless steel axle,suitable for salt and fresh water.
- permanent magnetic synchronous motor,efficient energy consumption.
- ABS plastic coated body,durable construction,non-corroding.
- Multiple application-able to pump and filter water,spray oxygen.
- Wide application for kinds of aquarium,craftwork,rockery,fontain and so on.



Model: **TP-180**
电压 Volt: 12/100/220/240V
频率 Freq: 50/60Hz
功率 Power: 2/2.5/4W
扬程 H/cm: 50cm
产品尺寸(LxWxH):40x35x30mm

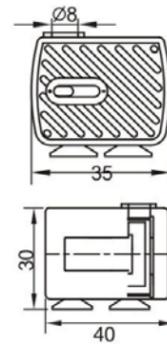


Model: **TP-200**
电压 Volt: 12/100/220/240V
频率 Freq: 50/60Hz
功率 Power: 2/2.5/4/5W
扬程 H/cm: 60/70cm
产品尺寸(LxWxH):50x44x33mm

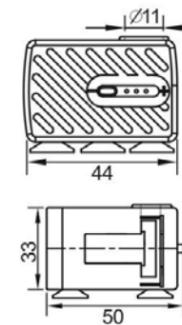


Model: **TP-300**
电压 Volt: 12/100/220/240V
频率 Freq: 50/60Hz
功率 Power: 4.3/4.5/5/5.5/6.5W
扬程 H/cm: 65/75cm
产品尺寸(LxWxH):60x40x50mm




Model: **TP-400**
电压 Volt: 12/100/110-120/220-240V
频率 Freq: 50/60Hz
功率 Power: 4/4.5/5/6W
扬程 H/cm: 70/90cm
产品尺寸(LxWxH):66x43.5x53mm

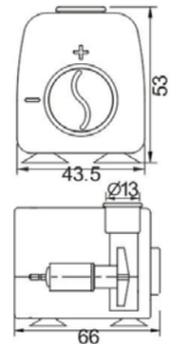


Model: **TP-450**
电压 Volt: 12/100/110-120/220-240V
频率 Freq: 50/60Hz
功率 Power: 6/6.5/7W
扬程 H/cm: 90/110cm
产品尺寸(LxWxH):66x43.5x53mm

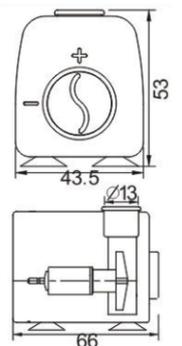

Model: **TP-500**
电压 Volt: 12/100/110-120/220-240V
频率 Freq: 50/60Hz
功率 Power: 6/6.5/7/7.5/8/9W
扬程 H/cm: 90/100cm
产品尺寸(LxWxH):72.5x50x58mm

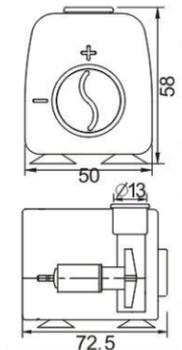

Model: **TP-600**
电压 Volt: 12/100/110-120/220-240V
频率 Freq: 50/60Hz
功率 Power: 9/10/11/12.5W
扬程 H/cm: 110/120/120cm
产品尺寸(LxWxH):72.5x50x58mm

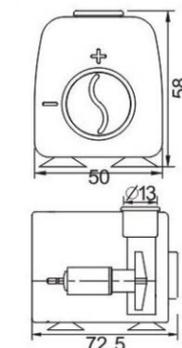

TP SERIES
TP 系列



TP SERIES
TP 系列




Model: **TP-750**

电压 Volt: 12/100/110-120/220-240V
频率 Freq: 50/60Hz
功率 Power: 8/10/11/12/13W
扬程 H/cm: 140/150cm
产品尺寸(LxWxH):76x50x62mm



Model: **TP-1500F**

电压 Volt: 12/100/110-120/220-240V
频率 Freq: 50/60Hz
功率 Power: 25/27.5/30W
扬程 H/cm: 220/230cm
产品尺寸(LxWxH):152x77x98mm




Model: **TP-1000**

电压 Volt: 12/100/110-120/220-240V
频率 Freq: 50/60Hz
功率 Power: 17/18/19/21W
扬程 H/cm: 140/160cm
产品尺寸(LxWxH):90x58x72.5mm




Model: **TP-2000**

电压 Volt: 110-120/220-240V
频率 Freq: 50/60Hz
功率 Power: 35/45W
扬程 H/cm: 250/270cm
产品尺寸(LxWxH):102x77x105mm




Model: **TP-1200**

电压 Volt: 12/100/110-120/220-240V
频率 Freq: 50/60Hz
功率 Power: 30/32W
扬程 H/cm: 190cm
产品尺寸(LxWxH):90x58x90mm




Model: **TP-2000F**

电压 Volt: 110-120/220-240V
频率 Freq: 50/60Hz
功率 Power: 35/45W
扬程 H/cm: 250/270cm
产品尺寸(LxWxH):156x77x105mm




Model: **TP-1500**

电压 Volt: 12/100/110-120/220-240V
频率 Freq: 50/60Hz
功率 Power: 25/27.5/30W
扬程 H/cm: 220/230cm
产品尺寸(LxWxH):103x77x98mm

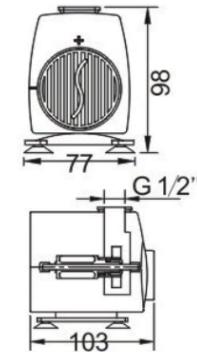

Model: **TP-2500**

电压 Volt: 110-120/220-240V
频率 Freq: 50/60Hz
功率 Power: 45W
扬程 H/cm: 270cm
产品尺寸(LxWxH):102x77x105mm



TP SERIES
TP 系列




TP SERIES
TP 系列




Model: **TP-2500F**

电压 Volt: 110-120/220-240V
频率 Freq: 50/60Hz
功率 Power: 45W
扬程 H/cm: 270cm
产品尺寸(LxWxH):156x77x105mm




Model: **TP-3500F**

电压 Volt: 110-120/220-240V
频率 Freq: 50/60Hz
功率 Power: 70/85W
扬程 H/cm: 340/350cm
产品尺寸(LxWxH):202x93x125mm




Model: **TP-3000**

电压 Volt: 110-120/220-240V
频率 Freq: 50/60Hz
功率 Power: 60/70W
扬程 H/cm: 290cm
产品尺寸(LxWxH):126x93x125mm




Model: **TP-3000F**

电压 Volt: 110-120/220-240V
频率 Freq: 50/60Hz
功率 Power: 60/70W
扬程 H/cm: 290cm
产品尺寸(LxWxH):202x93x125mm



Model: **TP-3500**

电压 Volt: 110-120/220-240V
频率 Freq: 50/60Hz
功率 Power: 70/85W
扬程 H/cm: 340/350cm
产品尺寸(LxWxH):126x93x125mm

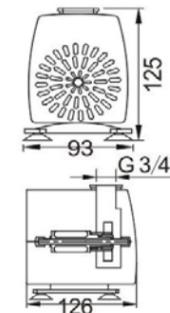

fountain PUMP

SGP SERIES SGP 系列

用途:

安全潜水、省电耐用、超静高效

适用于淡水、海水。

有效吸收水油污物，保持水面清洁。

适用于水族缸及喷泉等喷水装饰工程。

Use description:

Submersible safely.

Energy saving & Durable.

Applicable in both fresh water & sea water.

Absorb dirty oil effectively and keep water clean.

Widely used in aquarium & fountain projects etc.



SGP SERIES
SGP 系列

卓越的性能:

- 可通过水泵前部的旋钮调整水流大小的。
- 有良好的防水和绝缘性能。
- 防磨、耐腐、高品质的不锈钢轴，支持咸淡水环境。
- 永磁同步马达，高效率低消耗。
- 外壳为ABS材料，经久耐用之构造，无腐蚀隐患。
- 多种功能：涵盖抽水、过滤、喷洒、增氧等。
- 广泛用于鱼缸、工艺品、假山、喷泉花园等。

Outstanding Features:

- It is able to adjust the water freely by the knob in the front of pump.
- Waterproof and good performance of insulation.
- Anti-friction, rust-less, high-quality stainless steel axle, suitable for salt and fresh water.
- permanent magnetic synchronous motor, efficient energy consumption.
- ABS plastic coated body, durable construction, non-corroding.
- Multiple application-able to pump and filter water, spray oxygen.
- Wide application for kinds of aquarium, craftwork, rockery, fountain and so on.



Model: **SGP-300**


电压 Volt: 12/110-120/220-240V

频率 Freq: 50/60Hz

功率 Power: 4/5W

扬程 H/cm: 70/89cm

产品尺寸(LxWxH):65.5x38x56mm

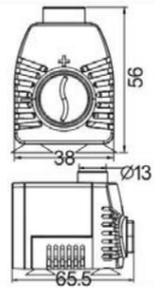

Model: **SGP-600**


电压 Volt: 12/110-120/220-240V

频率 Freq: 50/60Hz

功率 Power: 7W

扬程 H/cm: 110cm

产品尺寸(LxWxH):76.5x43.5x59.5mm

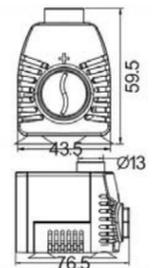

Model: **SGP-1200**


电压 Volt: 120V

频率 Freq: 60Hz

功率 Power: 22W

扬程 H/cm: 190cm

产品尺寸(LxWxH):76.5x43.5x59.5mm

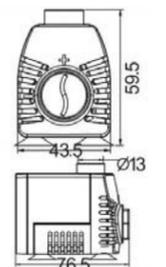

Model: **SGP-2000**


电压 Volt: 110-120/220-240V

频率 Freq: 50/60Hz

功率 Power: 35W

扬程 H/cm: 240/250cm

产品尺寸(LxWxH):105.5x76.8x116mm

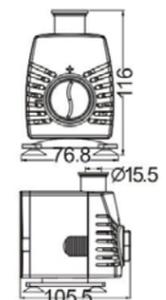

fountain PUMP




ECO

TPD SERIES TPD 系列

采用“高度集成驱动电路技术”和“先进的专用驱动程序技术”，集成了“永磁电机”的优点，不需另外提供转子的“励磁线圈”和“励磁电流”，开发出全新一代的潜水泵专用电机。“TPD系列”正是采用了此款节能环保的驱动电机潜水泵，配套高效的螺旋式泵腔设计，使“TPD系列”潜水泵“更节能”、“更环保”和“更安全”！


主要用途：水族，花园，喷泉

This new generation of submersible pump motor is developed by using "highly integrated driving circuit technology" and "advanced special driver technology", which integrates the advantages of permanent magnet motor, and no need for additional rotor excitation coil and excitation current. TPD pump is adopted this energy conservation and environmental protection motor, formed with a complete set of high efficient screw pump cavity design. These submersible pumps are more energy efficient, greener and safer!
Application: Aquariums, gardens, fountains

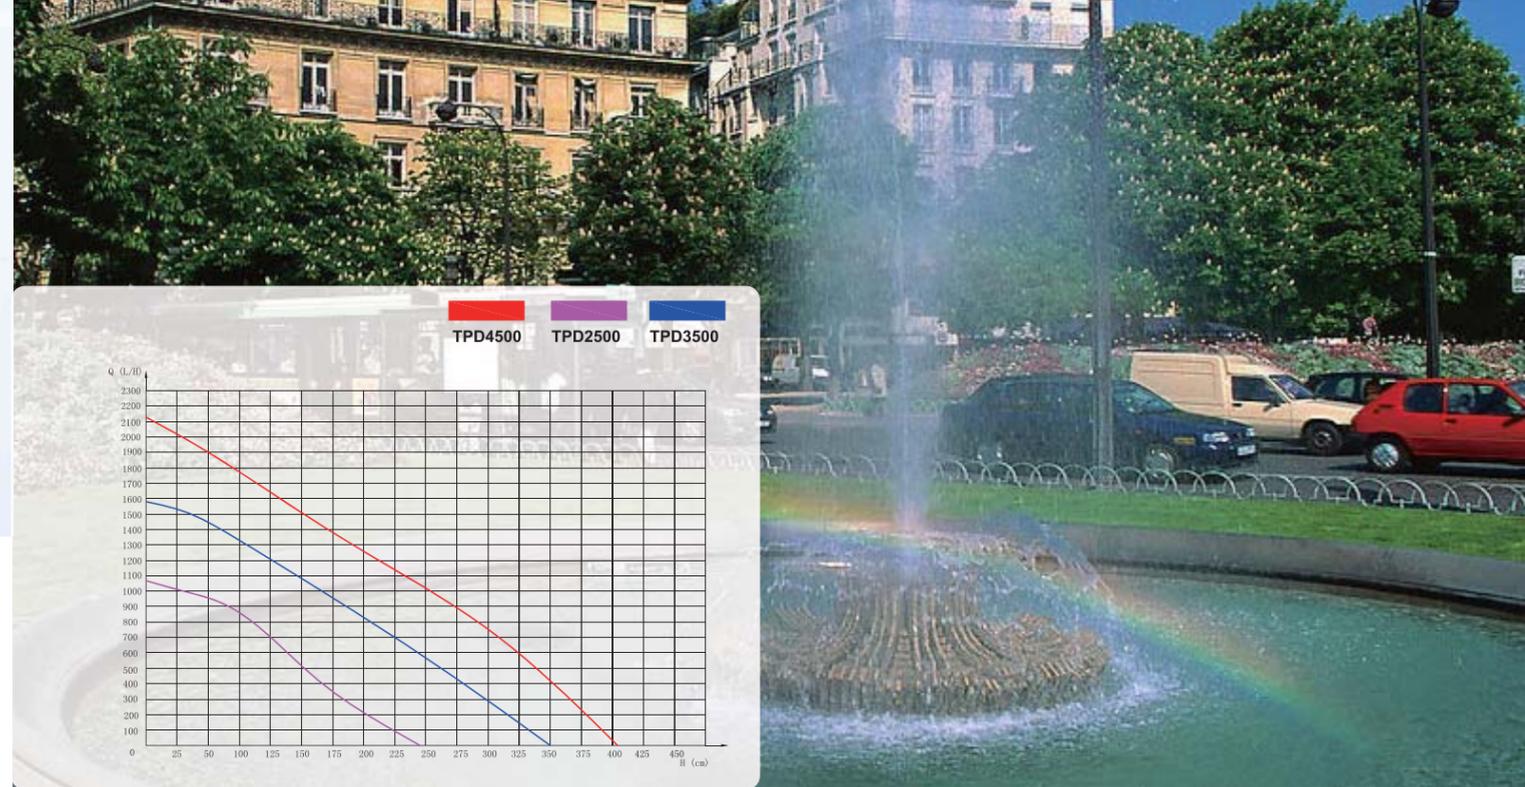


Model: **TPD-2500**

电压 Volt: 120V/220-240V
频率 Freq: 50/60Hz
功率 Power: 27W
扬程 H/cm: 1000cm
产品尺寸(LxWxH):152x100x101mm

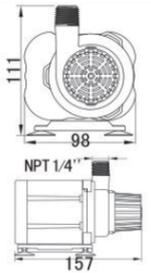


Model: **TPD-3500**

电压 Volt: 120V/220-240V
频率 Freq: 50/60Hz
功率 Power: 42W
扬程 H/cm: 350cm
产品尺寸(LxWxH):152x100x101mm

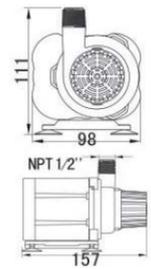

Model: **TPD-4500**

电压 Volt: 120V/220-240V
频率 Freq: 50/60Hz
功率 Power: 68W
扬程 H/cm: 410cm
产品尺寸(LxWxH):158x100x105mm

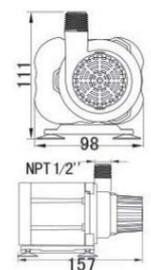

fountain PUMP

SFP SERIES SFP 系列



低水位自动停转水泵装有可以探测到水位过低并自动停止运转的感应器，当恢复到正常水位后，水泵重新开始运转，预防干转甚至烧坏。适用于中型或大型喷泉水池。简单方便。

This low water shut-off pump has built in sensors that detects low water levels and shuts itself off. Once normal levels resume, it turns back on Protects your pump from running dry and burning out. 130-300GPH, best suited for medium or large fountains. Easy, simple.

- 1、 low water shut-off feature when mounted on wet surfaces.
- 2、 Suction cups hold pump secure when mounted on wet surfaces.
- 3、 Meant for fresh water use only.
- 4、 Do not use this pump in water that is heavily chlorinated or water that has a high pH levels.
- 5、 This kind of pumps are low voltage. can be used with LED lights that powers≤2W directly.



Model: **SFP170**
 电压 Volt: 120V/220-240V
 频率 Freq: 50/60Hz
 功率 Power: 10W
 扬程 H/cm: 130cm
 产品尺寸(AxBxC):85x59x62.5mm; D=φ13

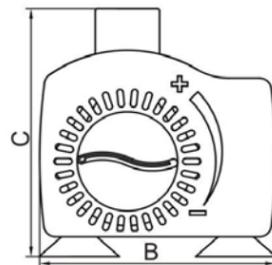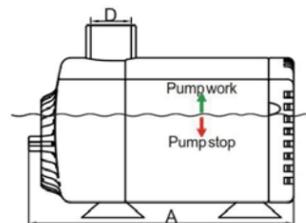


Model: **SFP300** (with light)
 电压 Volt: 120V/220-240V
 频率 Freq: 50/60Hz
 功率 Power: 22W
 扬程 H/cm: 200cm
 产品尺寸(AxBxC):102x74x75mm; D=φ13

Waterfalls PUMP



SBP SERIES
SBP 系列

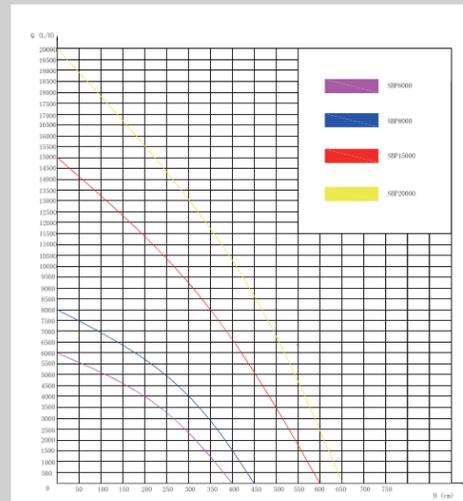

显著优点:

- 可用于水底。
- 海水淡水两用。
- 采用优质ABS作为机壳塑材。
- 提供专业节能型电机。
- 采用高精度抛磨陶瓷轴套。
- 抗损效果显著、叶轮动力强劲。
- 所有电气部分完全填入腹腔并有高效树脂密封，无漏电隐患。
- 维护极为简单，无需特别工具。



Outstanding Features:

- The hidden power inside the pond.
- ABS Pump housing
- Energy saving motor
- Ceramic bearings
- Particularly robust impeller
- Suitable for filter systems
- All electrical parts full encapsulated in artificial resin
- Easy maintenance, no tools required
- Removable rotor assembly

Product information 产品信息

	SBP6000	SBP8000	SBP15000	SBP20000
Dimension(mm) 尺寸	239*123*151mm		239*123*151mm	
Supply Voltage 工作电压	120v 60Hz / 220V-240V 50Hz			
Power 功率	45W	65W	140W	200W
H/cm 扬程	400cm	450cm	600cm	650cm
L/H 流量	6000l/h	8000l/h	15000l/h	20000l/h
Outlet 出水口	1 1/4" 1"	1 1/2" 1"	1 1/2" 2"	

Pond PUMP

ER SERIES

ER 系列

显著优点:


- 可陆用。
- 海水淡水两用。
- 采用优质ABS作为机壳塑材。
- 提供专业节能型电机。
- 采用高精度抛磨陶瓷轴套。
- 抗损效果显著、叶轮动力强劲。
- 所有电气部分完全填入腹腔并有高效树脂密封，无漏电隐患。
- 维护极为简单，无需特别工具。

Outstanding Features:

- The hidden power inside the pond.
- ABS Pump housing
- Energy saving motor
- Ceramic bearings
- Particularly robust impeller
- Suitable for filter systems
- All electrical parts full encapsulated in artificial resin
- Easy maintenance, no tools required
- Removable rotor assembly



Product information 产品信息

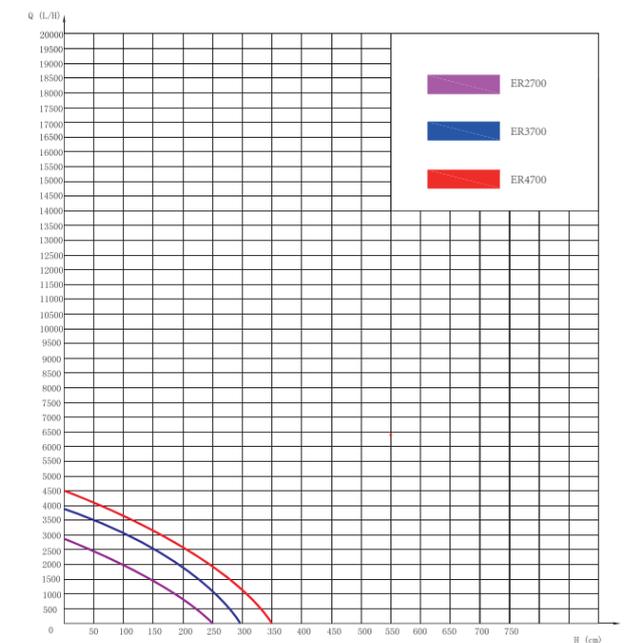

	ER2700	ER3700	ER4700
Dimension(mm) 尺寸	165*87*121mm		
Supply Voltage 工作电压	220-240V 50Hz		
Power 功率	32W	47W	55W
H/cm 扬程	250cm	290cm	350cm
L/H 流量	2700l/h	3700l/h	4500l/h
Outlet 出水口	3/4"		

Pond PUMP

LBP SERIES

LBP 系列




最新款的“直流变频”技术潜水泵，采用“专用直流变频驱动电路”。配以独特的外形设计，使水泵可以平卧，直立的工作。配套泵腔使用高效的螺旋式泵腔设计，使水泵达到高扬程，大流量的同时，更节能，更环保。

主要用途：水族，花园，喷泉

This is the latest "DC frequency conversion" technology submersible pump, using "special DC variable frequency drive circuit with the unique appearance design. The pumps can work recumbently or erectly. Auxiliary pump cavity is the efficient screw pump cavity design which makes the pump to achieve high lift and large flow rate at the same time, more energy-efficient and more environmentally friendly.

Application: Aquariums, gardens, fountains

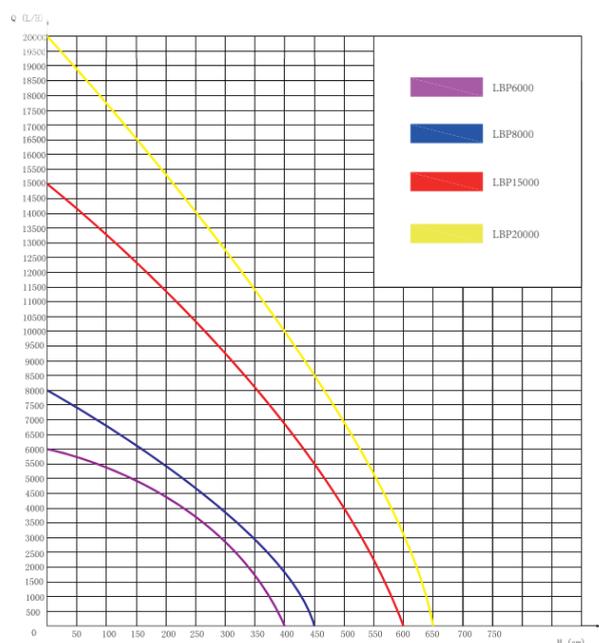

Product information

产品信息

	LBP6000	LBP8000	LBP15000	LBP20000
Dimension(mm) 尺寸	270*150*162mm			
Supply Voltage 工作电压	120v 60Hz / 220V-240V 50Hz			
Power 功率	45W	65W	140W	200W
H/cm 扬程	400cm	450cm	600cm	650cm
L/H 流量	6000l/h	8000l/h	15000l/h	20000l/h
Outlet 出水口	1 1/4" 1"	1 1/2" 1"	1 1/2" 2"	

LSP10000
LSP13000

LSP7000
LSP8500



Utility & Sump PUMP

LSP SERIES

LSP 系列




此系列水泵使用高效的“单相异步电机”驱动，性能稳定，使用寿命长，潜水泵的泵腔是螺旋式泵腔设计，高扬程，大流量，出水效率高；吸水口与水底距离为3 mm；主要针对能抽取更底的藏水，同时可以配装水位保护开关，在水位低于一定高度时，水泵自动停止运行，在水位高度达一定位置时，水泵自动开始工作。

主要用途：用于水池，地下室，车库等抽水用！

LSP pumps are using efficient single-phase asynchronous motor drive, stable performance and long service life. Pump chamber is a screw cavity design, high lift, large flow, high efficiency water outlet; Water inlet is only 3 mm from the bottom. It's designed for getting water from a very low level. It is also equipped with water level protection switch. When the water level is lower than a certain height, the pump automatically stops running, in the water level of a certain position, the pump automatically starts to work.

Application: Ponds, basements, garages

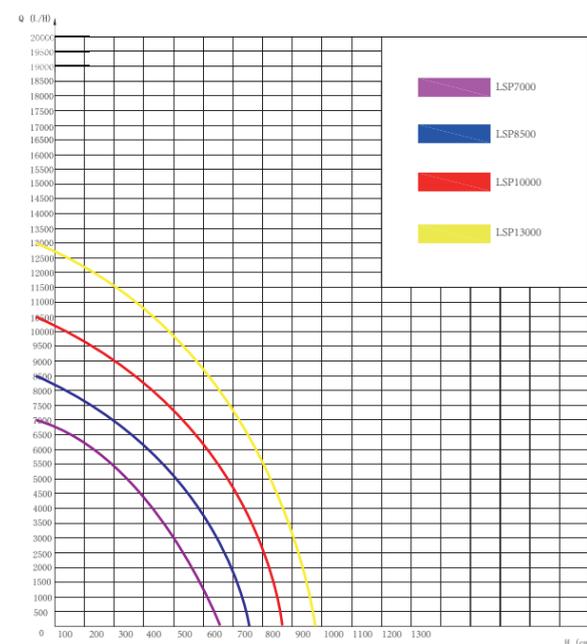

Product information

产品信息

	LSP7000	LSP8500	LSP10000	LSP13000
Dimension(mm) 尺寸	Φ155x230		Φ160x268	
Supply Voltage 工作电压	120V 60Hz		220-240V 50Hz	
Power 功率	200W	320W	400W	460W
H/cm 扬程	620cm	720cm	840cm	940cm
L/H 流量	7000l/h	8500l/h	10500l/h	13000l/h
Outlet 出水口	1"		1 1/4"	


FILTER SERIES / 过滤器系列



- 1、 Biochemistry sponge to filter,water clearing;
- 2、 Includes large power UVC-lamp for clearing the alga and sterilization;
- 3、 Expelling contamination from filter by backflush;
- 4、 Easy to operate,take part,fit and clean;
- 5、 Large capacity for biological filtering systems;
- 6、 No water leakage,includes warning valve for pressure overrunning,safe for using;
- 7、 Suitable for garden ponds,fish ponds.

- 1、 生化绵过滤，清洁水源。
- 2、 带有大功率UVC灯，可彻底清除藻类和杀死有害细菌。
- 3、 可以反冲洗，将过滤有污染物体排出桶外。
- 4、 易拆卸，易组装，操作和清洗十分简便。
- 5、 超大容积，更有效地进行生化过滤。
- 6、 不漏水，带有压力过高警告阀，安全耐用。
- 7、 适用于园艺工程，池塘及鱼塘的过滤系统。

Pressure Activated -Self Cleaning Filter

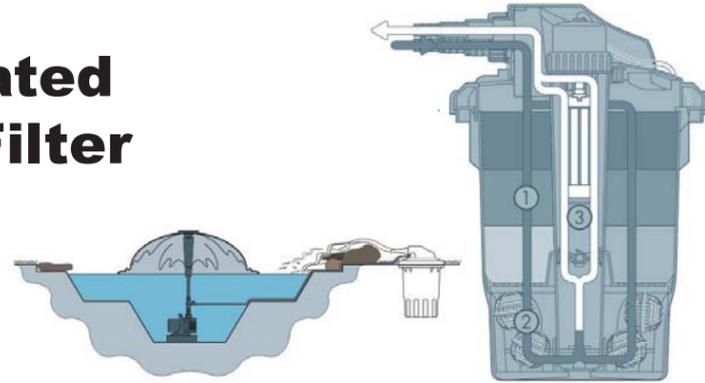

STAGE 1 - MECHANICAL FILTRATION

Water is pumped into the filter creating the necessary pressure to begin the mechanical filtration stage. There are three phases in the mechanical filtration stage-coarse,medium-coarse and fine filtration. Each phase uses a specially designed foam sponge to effectively remove most of unwanted debris.

STAGE 2 - BIOLOGICAL FILTRATION

The biological filtration stage begins when water reaches the bottom of the filter. This stage uses bio-balls providing a habitat for beneficial bacteria to grow. These bacteria naturally convert harmful ammonia and other wastes into healthy nitrates that fertilize aquatic plants and support a healthy pond environment.

STAGE 3 - UV FILTRATION

The final filtering stage uses a low voltage-Ultra-Violet(UV)light located in the middle of your filter. Exposure to the UV light kills algae as the water passes upward through the filter on its way back to your pond.

第一阶段：机械过滤


把水泵经过过滤桶的同时提供了机械过滤阶段开始时的必要压力。机械过滤分三个阶段；粗的过滤，中粗过滤和细的过滤。每一个阶段使用一个特别设计的泡沫海棉，能有效的去除大部分多余的杂物。

第二阶段：生物过滤

生物过滤阶段开始于当水到达过滤器的底部时。这个阶段使用生化球为有益细菌的生长提供了栖息地，这些细菌可以自然的将有害氨和其他废物转换为健康的能够丰富水生植物生长的硝酸钾并维持一个健康清洁的池塘环境。

第三阶段：紫外线过滤

最后的过滤阶段是使用一个位于您的过滤器中央的低电压紫外线（UV灯）。当水向上穿过过滤器回到池塘的过程中暴露在紫外线中的藻类和细菌就会被杀死，杀菌率高达95%以上。

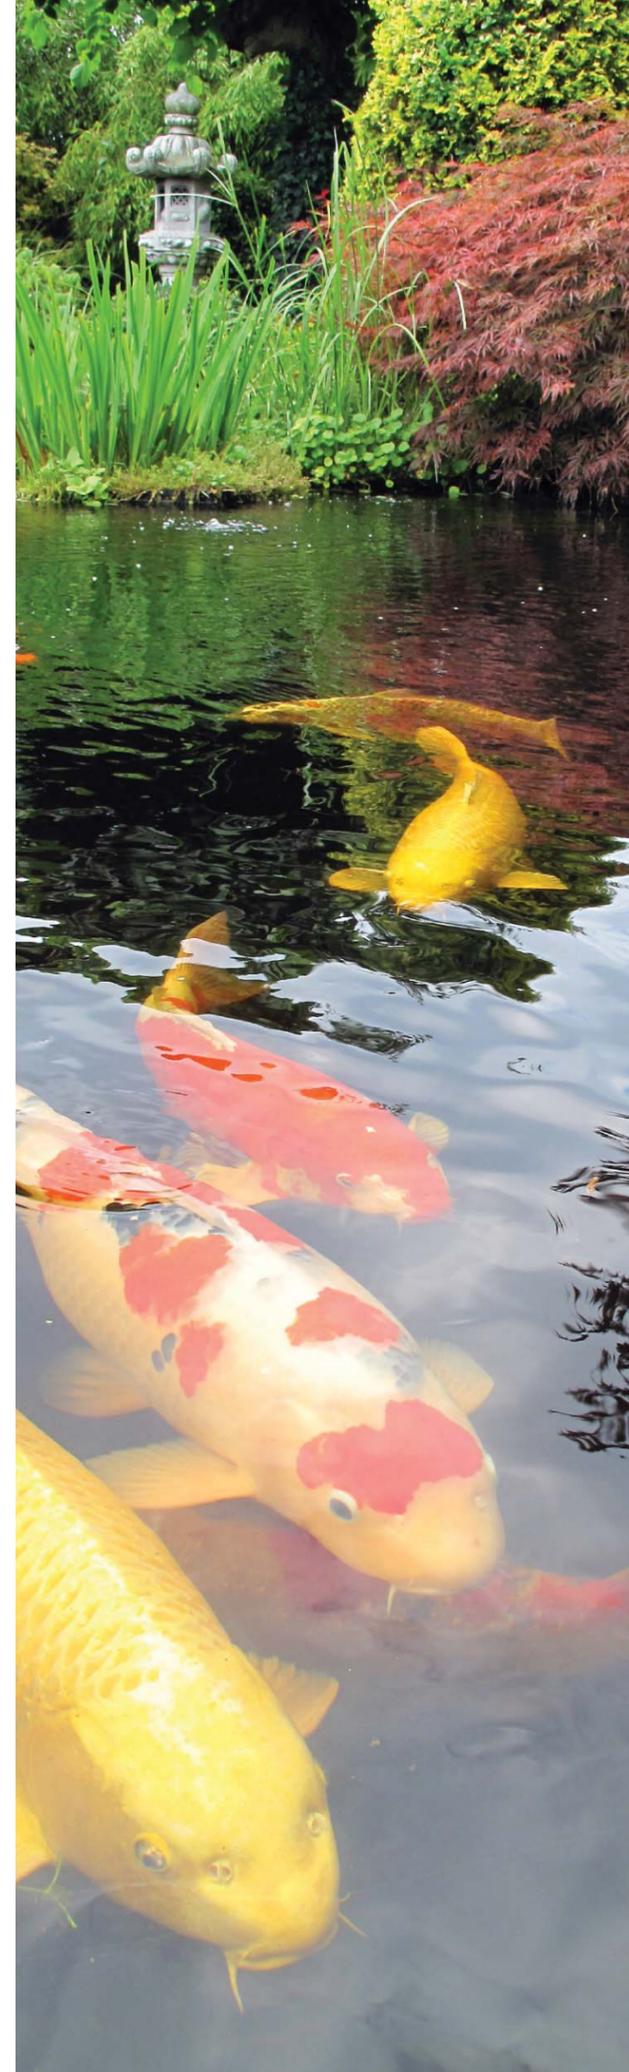

Model 型号	10L-Pressure Activated-Self Cleaning Filter
Volume(L) 体积	10
Ponds(L) 水池体积	5000
In/Out(mm) 进、出水口	Φ15/20/25
Dimension(mm) 尺寸	Φ288.5*401
UV(W) 功率	7

10L



Model 型号	20L-Pressure Activated-Self Cleaning Filter
Volume(L) 体积	20
Ponds(L) 水池体积	9000
In/Out(mm) 进、出水口	Φ20/25/32/40
Dimension(mm) 尺寸	Φ364.5*516
UV(W) 功率	9
Aperatiing voltae 工作电压	220-240v /50Hz 、120v /60Hz


20L




Model 型号	30L-Pressure Activated-Self Cleaning Filter
Volume(L) 体积	30
Ponds(L) 水池体积	13000
In/Out(mm) 进、出水口	Φ20/25/32/40
Dimension(mm) 尺寸	Φ364.5*396
UV(W) 功率	11
Aperatiing voltae 工作电压	220-240v /50Hz 、120v /60Hz

30L

Filter applications:

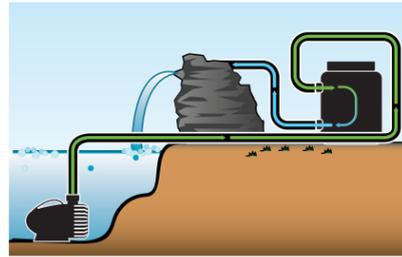


Can be used out of your pond.

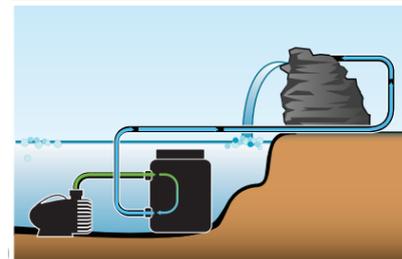

Can be used in your pond.


- 1、 For pumps 800-1500 gallons
- 2、 Pressurized for maximum cleaning efficiency.
- 3、 Promotes growth of beneficial bacteria.
- 4、 Improves water quality.
- 5、 Can be used in and out of ponds.

- 1、 适配于800至1500加仑的水泵。
- 2、 通过加压到高效清洗的目的。
- 3、 促进有益细菌的生长。
- 4、 有效改善清水系统的质量。
- 5、 池塘内外均可使用。

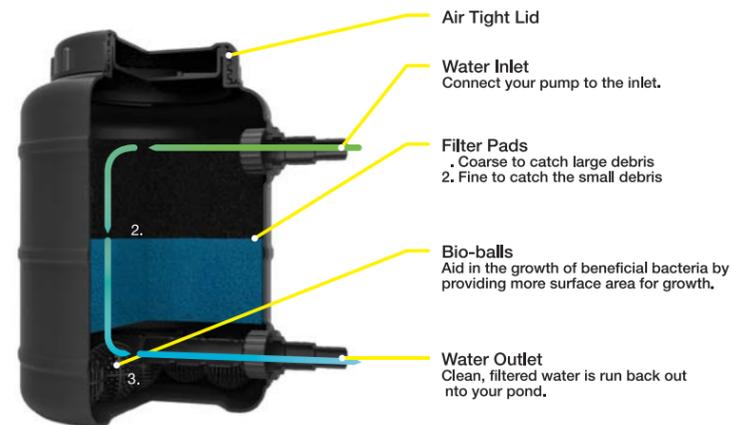


Model 型号	GLQ-600
Volume(L) 体积	10
Ponds(L) 水池体积	5000
In/Out(mm) 进、出水口	Φ20/25
Dimension(mm) 尺寸	Φ230*337

Filter applications:

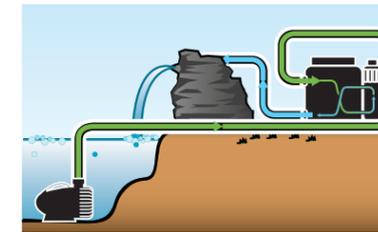


Can be used out of your pond.

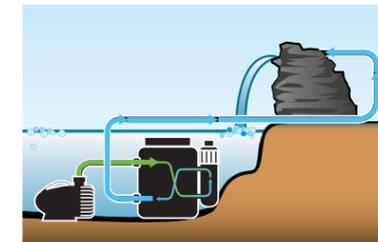

Can be used in your pond.

- 1、 For pumps 800-1500 gallons
- 2、 UV reduces micro-organisms&bacteria that cause green water.
- 3、 Pressurized for maximum cleaning efficiency.Inproves water quality
- 4、 Promotes growth of beneficial bacteria.
- 5、 Can be used in and out of ponds.


- 1、 适配于800至1500加仑的水泵。
- 2、 UV灯有效抑制因微生物及细菌生长而导致水体发绿
- 3、 通过加压到高效清洗的目的。
- 4、 促进有益细菌的生长。
- 5、 池塘内外均可使用。

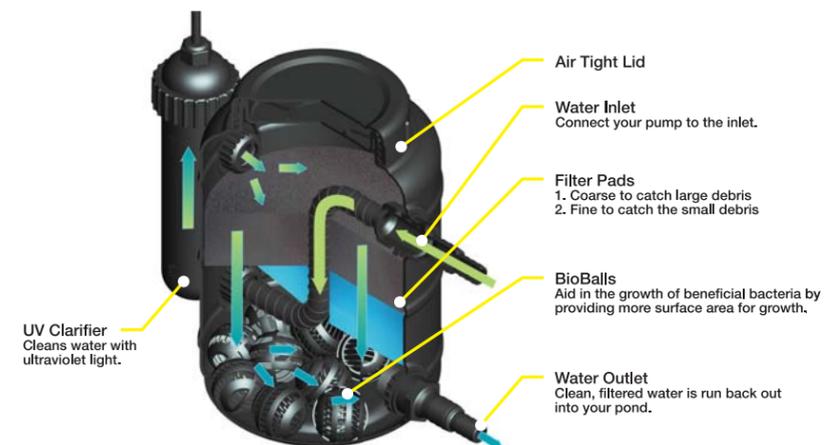


Model 型号	GLQ-600-UVC
Volume(L) 体积	10
Ponds(L) 水池体积	5000
In/Out(mm) 进、出水口	Φ20/25
Dimension(mm) 尺寸	Φ306*337
Operatiing voltae 工作电压	120V 60Hz/220-240v /50Hz
UV(W) 功率	9



Filter applications:

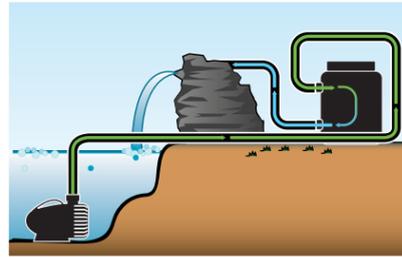


Can be used out of your pond.

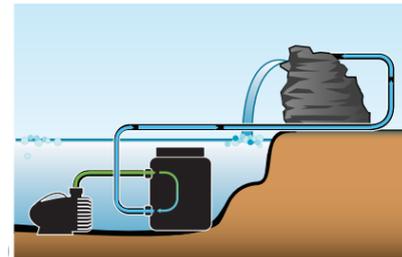

Can be used in your pond.


- 1、 For pumps 800-1500 gallons
- 2、 Pressurized for maximum cleaning efficiency.
- 3、 Promotes growth of beneficial bacteria.
- 4、 Improves water quality.
- 5、 Can be used in and out of ponds.

- 1、 适配于800至1500加仑的水泵。
- 2、 通过加压到高效清洗的目的。
- 3、 促进有益细菌的生长。
- 4、 有效改善清水系统的质量。
- 5、 池塘内外均可使用。

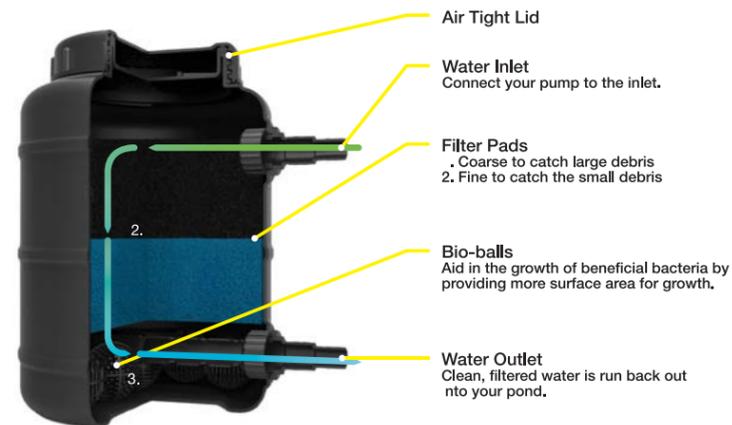


Model 型号	GLQ-600
Volume(L) 体积	10
Ponds(L) 水池体积	5000
In/Out(mm) 进、出水口	Φ20/25
Dimension(mm) 尺寸	Φ230*337

Filter applications:

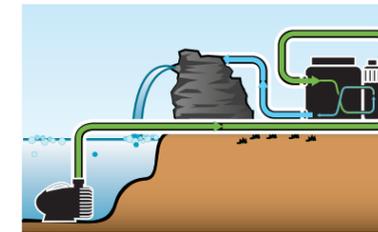


Can be used out of your pond.

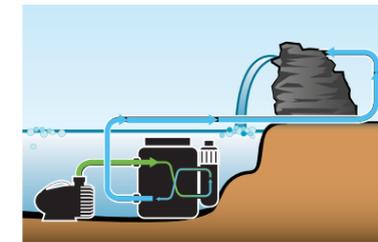

Can be used in your pond.

- 1、 For pumps 800-1500 gallons
- 2、 UV reduces micro-organisms&bacteria that cause green water.
- 3、 Pressurized for maximum cleaning efficiency.Inproves water quality
- 4、 Promotes growth of beneficial bacteria.
- 5、 Can be used in and out of ponds.

- 1、 适配于800至1500加仑的水泵。
- 2、 UV灯有效抑制因微生物及细菌生长而导致水体发绿
- 3、 通过加压到高效清洗的目的。
- 4、 促进有益细菌的生长。
- 5、 池塘内外均可使用。

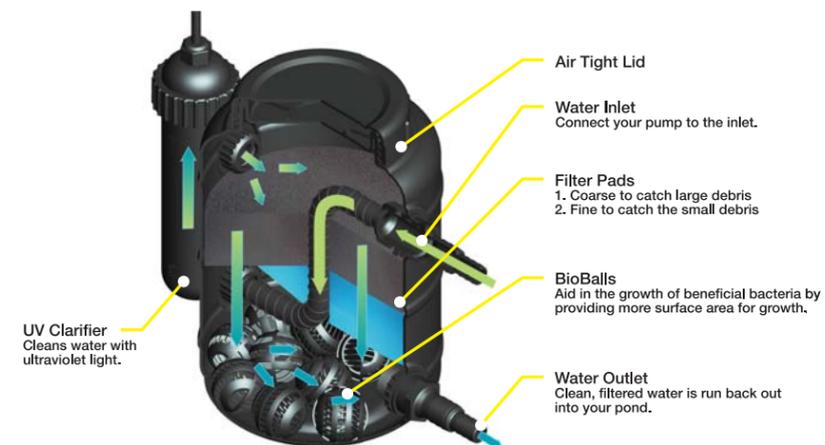

Model 型号	GLQ-600-UVC
Volume(L) 体积	10
Ponds(L) 水池体积	5000
In/Out(mm) 进、出水口	Φ20/25
Dimension(mm) 尺寸	Φ306*337
Operatiing voltae 工作电压	120V 60Hz/220-240v /50Hz
UV(W) 功率	9






- 1、Protects pump from debris.
- 2、Improves water quality and clarity.
- 3、Promotes growth of beneficial bacteria.
- 4、Ideal for pumps up to 500 gallons, such as; TPD300、TPD300H、TPD400H.

- 1、避免水泵受到碎片的破坏，延长泵的使用寿命。
- 2、抽水的同时也能清洁水源。
- 3、促进有益细菌的生长。
- 4、可以TPD300\TPD300H\TPD400H水泵搭配使用。



Model 型号	Pump Filter
Dimension(mm) 尺寸	310*158*149mm

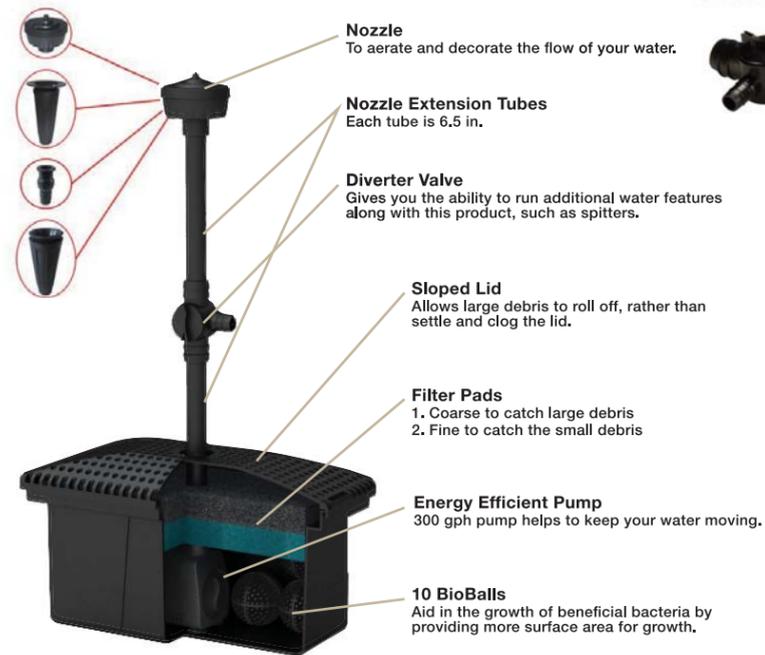

Model 型号	Pump Filter(with pump)
Dimension(mm) 尺寸	310*158*176.5mm
Operating voltage 工作电压	220-240v /50Hz
Power(W) 功率	30

The multifunctional integration design, simple and compact structure makes this product only occupy the minimum space; various optional nozzles for your choice to decorated your small garden or pond at home. The filter box is equipped with 30PPI and 15PPI biochemical filter pads, needle type biological filter balls and energy efficient pump + multi style nozzles. It will not only filter impurities in water, biochemical filter sponge and pin type biological filtering ball can also develop the quality of beneficial nitrifying bacteria in the water, and provide good planting environment. The number of nitrifying bacteria can decompose harmful substances that are harmful to fish, and can make the water clearer. The fish will then be healthier and more active!

多功能一体化设计，简单而紧凑的结构，使此款产品占用最小的空间；可选配各种喷头，点缀下家里的小花园，小鱼池。具有另一翻惬意的感受！


过滤箱内置了“30PPI”和“15PPI生化过滤海绵”、“针式生化过滤球”和“高效节能的水泵+多款式喷头组。”。工作中，既可以过滤水中杂质，“生化过滤海绵”及“针式生化过滤球”也可以培养对水质有益的“硝化细菌”，提供良好的繁殖场所。大量的“硝化细菌”能分解对鱼类的有害物质，并且能使水质更清澈，使鱼类更健康！更活跃！



BOTH FOR FRESH & SEA WATER

This UV light is developed with German technology and equipped with a big watt UV light that works for 8000 hours and a quartz glass tube that endures $\geq 1000^{\circ}\text{C}$ temperature. $\geq 85\%$ of the ultraviolet radiation light can reach water directly to ensure efficient sterilization and control the growth of bad bacteria and algae which helps the quality of your water. Keeps fish away from diseases. Main application: aquarium, fish pond, garden pond etc.

采用德国技术开发的新一代紫外线杀菌过滤器，配置8000小时的工作寿命的大功率紫外杀菌灯和耐 $\geq 1000^{\circ}\text{C}$ 高温的高通透“石英玻璃管”，使紫外线能 $\geq 85\%$ 透过玻璃直接照射入水中，达到高效的杀菌效果，有效的控制池塘的有害细菌和藻类生长，从而保证池塘水质的清洁！保护鱼类远离疾病！主要用途：鱼缸、鱼池，花园水池等。

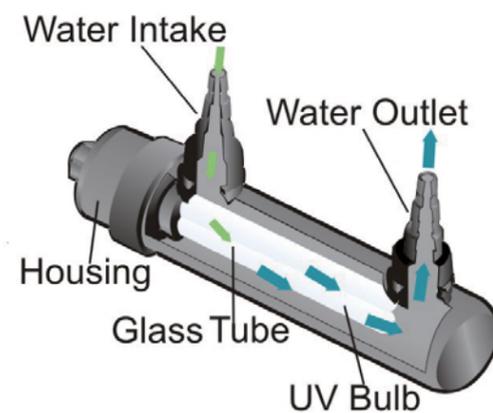

UV LAMP
BOTH FOR FRESH
& SEA WATER



Model: **CL-UV9**

灯电压 Volt: 60/120V
频率 Freq: 60Hz
功率 Power: 9W
灯时长 Bulb life: 8000H
进出水口 In/Out tlet: $\Phi 15/20/25$
产品尺寸(LxWxH): 287*83*102mm



Model: **STUV9-27-09-BW**

灯电压 Volt: 220-240V
频率 Freq: 60Hz
功率 Power: 9W
灯时长 Bulb life: 8000H
进出水口 In/Out tlet: $\Phi 15/20$
产品尺寸(LxWxH): 264*144*101mm



Model: **STUV18-38-15-BW**

灯电压 Volt: 220-240V
频率 Freq: 50Hz
功率 Power: 18W
灯时长 Bulb life: 8000H
进出水口 In/Out tlet: $\Phi 20/25/32/40$
产品尺寸(LxWxH): 380*176*149mm



Model: **STUV36-65-18-BW**

Model: **STUV55-65-15-BW**

灯电压 Volt: 220-240V
频率 Freq: 50Hz
功率 Power: 36/55W
灯时长 Bulb life: 8000H
进出水口 In/Out tlet: $\Phi 20/25/32/40$
产品尺寸(LxWxH): 658*176*149mm

Full-automatic electric wave filter


This fully automatic rolling filter is designed with transparent PC chamber which allows you to see the inner filtration condition clearly. The equipped rolling paper is able to sort out minor contaminations as little as 0.1mm and get them out from water to keep the water clean. Main application: aquarium, fish pond, garden pond etc.

全自动过滤功能，PC透明箱体，对内部过滤状态一目了然，配套无纺布，对细小0.1mm的杂质都能根本清理，并且自动将其分离出水中，保证水质的清洁！主要用途：鱼缸、鱼池，花园水池等




Model: **GLQ-4227-T-GS**

输出电压 Output Volt: AC230V/50Hz
输入电压 Input Volt: 12V
功率 Power: 5.2W
进/出水口 In/Out tlet: Φ25/32/40
产品尺寸(LxWxH):420*240*455mm

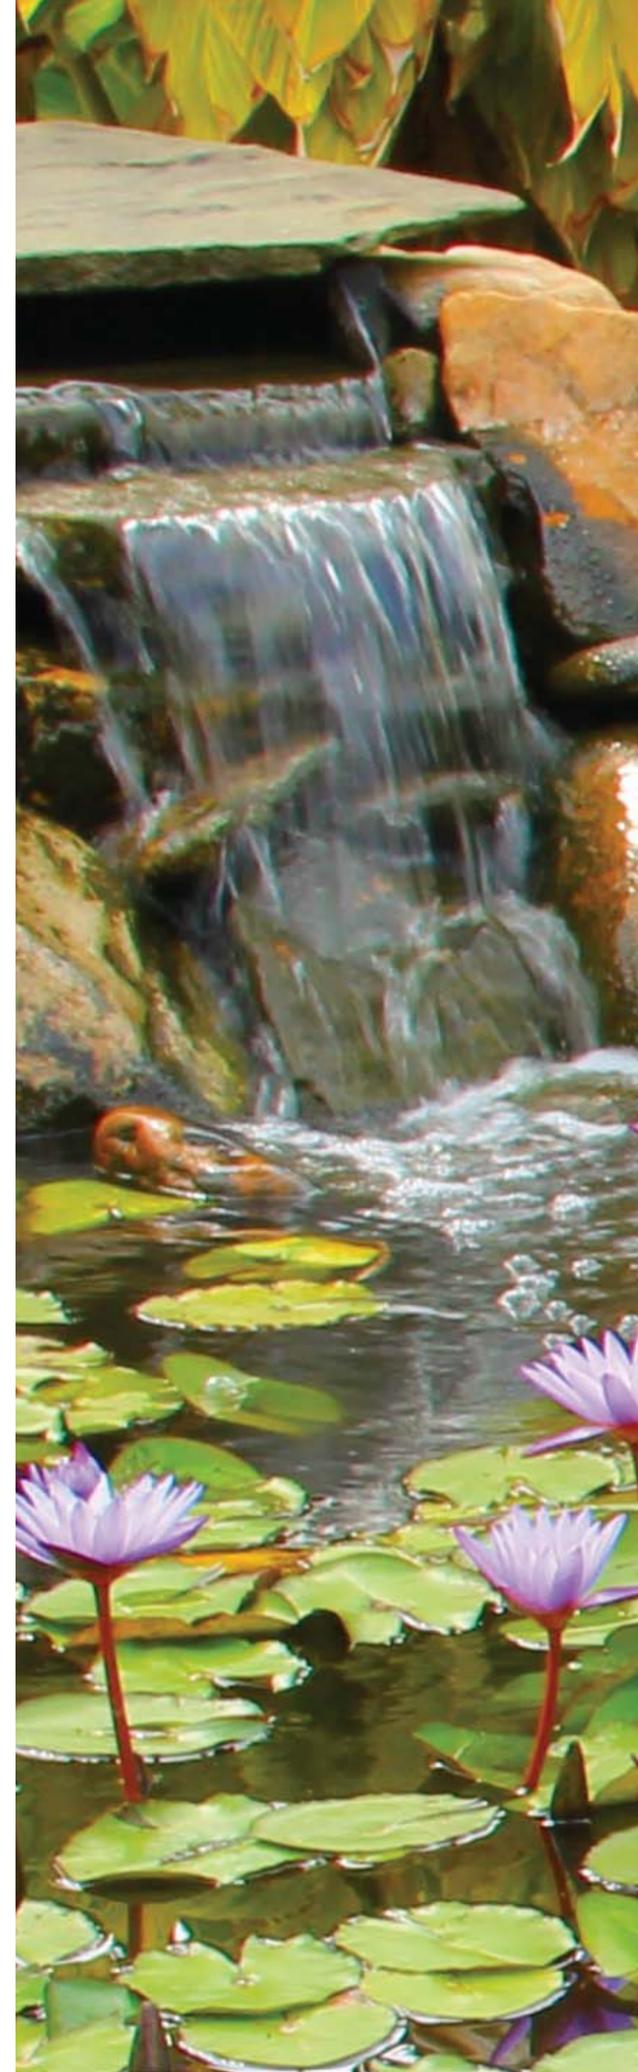

WATERFALL SPILLWAY

Easily add a beautiful waterfall to any pond!

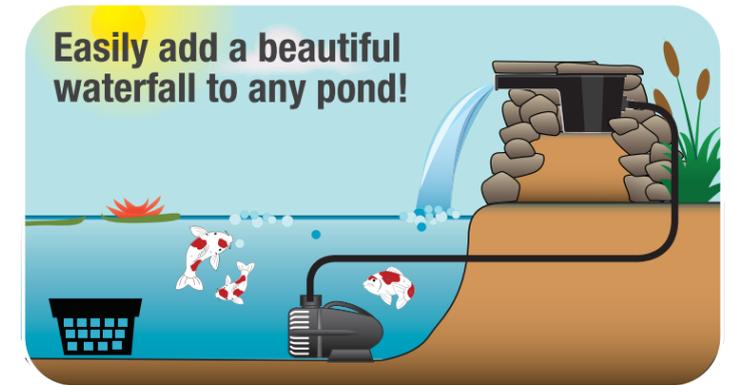

- 1、Durable,UV resitant high impact plastic;
- 2、Easily mounts to any liner;
- 1、使用耐用，防紫外线，防冲击塑料；
- 2、可以和任何水池搭配使用；



Model: **8in BBH**


产品尺寸(LxWxH):368*260*152mm

LIGHT SERIES / 灯系列



- 1、Green,environmental fridndly,no radiation pollution,neater and cleaner.
- 2、High efficiency,energy saving,80%-90% more energy saving saving than traditional lamp.
- 3、Low noise,surface temperature $\leq 60^{\circ}\text{C}$.
- 4、Soft light,protects your eyes.
- 5、Variety styes,multiple light colors for your choice.
- 6、Low voltage,safe and reliable.
- 7、Solid,longer life.

- 1、绿色环保，无辐射无污染，更卫生整洁。
- 2、高效节源，比传统光源节能80%—90%。
- 3、噪间干扰低，表面温度 $\leq 60^{\circ}\text{C}$ 。
- 4、光线柔和，可以保护眼睛。
- 5、款式多样，多种光色可供选用。
- 6、工作电压低，安全可靠。
- 7、坚固牢靠，寿命更长。

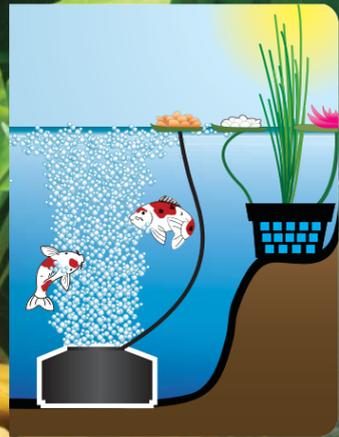


18 Energy Efficient LED Lights
illuminate the bubbles

Filter Pad
catches debris

Ceramic Bio-Media
promote the growth of
beneficial bacteria

Also includes air tube
and floating lily with air flow control
(not shown)

Energy Efficient Pump
uses only 24 watts of power

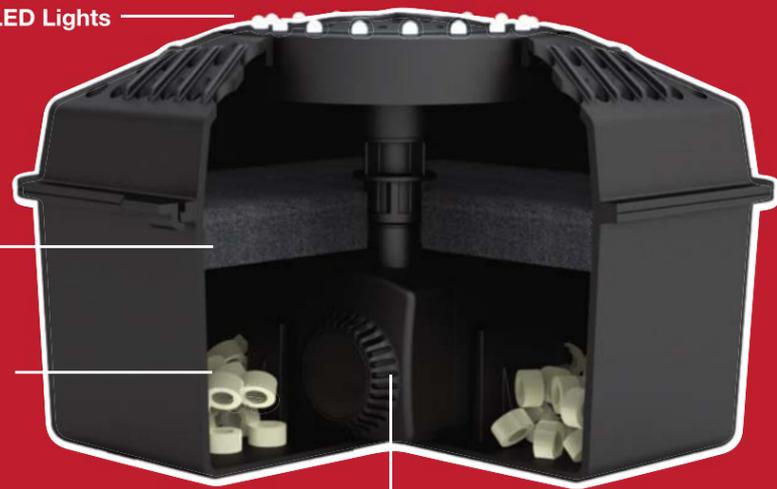

Model: **QPD-21-19-BW**

Size(尺寸): 208*191*151mm

Colour of LED Light(灯光颜色): White(白色)、Blue(蓝色)

Supply Voltage(工作电压): 120V 60Hz / 220-240V 50Hz

Energy Efficient LED Lights
illuminate the bubbles

Filter Pad purifies water

Ceramic Bio-Media

Energy Efficient, oil free Pump
keeps your pond water flowing



Model: **QPD-20-20-BW**

Size(尺寸): Φ 200*210mm

Colour of LED Light(灯光颜色): White(白色)、Blue(蓝色)

Supply Voltage(工作电压): 120V 60Hz / 220-240V 50Hz



This product is an integration combination design, built-in UP - 900 submersible pump, filter, biochemical sponge and 7w UV light, with small nozzle group and LED lights on the top; This unique design makes the product floating in water! The filter not only filters dirt but also offers breeding places for good bacteria, and it decomposes organic matter in water, makes water clearer. The ultraviolet UV lamp is harmful to the algae and bacteria in water. It inhibits their excessive reproduction.

一体化组合设计，内置UP-900潜水泵、过滤网，生化海绵和5W UV杀菌灯，外置小型喷头组和LED灯；独特的设计使产品直接漂浮在水面上工作！

而在享受休闲生活的同时，此款产品也在默默的过滤杂物，生化陶瓷球也给“有益细菌”提供繁殖场所，分解水中有机物，使水质更清澈；紫外线UV杀菌灯对水中有害藻类和细菌进行有效的抑制，防止过度的繁殖。

主要用途：家庭花园的小水池。



Model: **DL-25-25-BW**

Size(尺寸): $\Phi 240 \times 120\text{mm}$

Colour of LED Light(灯光颜色): White(白色)、Blue(蓝色)

Supply Voltage(工作电压): 120V 60Hz / 220-240V 50Hz

UVC-POWERUV (UV灯功率): 5W



Lighted Waterfall LED Spillway

- 1、Brilliant,energy efficient LEDs,
- 2、Biochemistry sponge to connector,protects pump from debris.
- 3、TPD series pumps for larger flow.
- 4、Translucent design,more sigh and more beauty.

- 1、高亮度，高效节能的LED灯。
- 2、水泵进水口带有生化过滤棉，避免水泵受沙料等杂质损坏。
- 3、配用TPD系列水泵，大流量。
- 4、透明外观设计，观赏性更好。
- 5、白天与黑夜均可使用。



Model: **PBD-30-39-CW**

Size(产品尺寸)(LxWxH):391*302*190mm

Power(功率):1W

Outlet(出水口):3/4", 1"

Volt(输出电压):12V 50/60Hz

Colour of LED Light(灯光颜色): White(白色)、Blue(蓝色)

POND And LANDSCAPE Light

- 1、 Safe operating voltage:AC 12V
- 2、 Different styles,optional watts and color disks.
- 3、 Low consumption,energy saving and environment protected.
- 4、 Work alone,also ideal for use with low voltage pumps as a set.

- 1、 AC 12V安全工作电压。
- 2、 款式多，可随意更换灯的功率与色片。
- 3、 功率低，节能环保。
- 4、 可单独工作，亦可与其他低压水泵配套使用。



Model: **Φ8-1LED**

灯电压 Volt: 12V
功率 Power: 0.5W
旋转度 Bean Angle: 36°
产品尺寸(LxWxH):Φ56.5*78mm



Model: **3-Φ8-1LED**

灯电压 Volt: 12V
功率 Power: 1.5W
旋转度 Bean Angle: 36°
产品尺寸(LxWxH):Φ56.5*78mm



**POND
ADN LANDSCAPE
LED Spillway**



Model: **3-Φ5-1LED**

灯电压 Volt: 12V
频率 Freq: 50/60Hz
功率 Power: 1W
灯时长 Bulb life: 50000H
产品尺寸(LxWxH):65*35*82mm



Model: **6-Φ5-1LED**

灯电压 Volt: 12V
频率 Freq: 50/60Hz
功率 Power: 1W
灯时长 Bulb life: 50000H
产品尺寸(LxWxH):65*35*82mm



Model: **FQD-3W/FQD-3C**

灯电压 Volt: 12V
频率 Freq: 60Hz
功率 Power: 0.1W
灯时长 Bulb life: 50000H
产品尺寸(LxWxH):Φ85*150mm



Model: **FL-10**

灯电压 Volt: 12V
频率 Freq: 50/60Hz
功率 Power: 2/4/5/10W
灯时长 Bulb life: 50000H
产品尺寸(LxWxH):Φ15*67.5mm





LED ROCK ACCENT LIGHTS

- 1、 Ideal for use in and out of ponds;
- 2、 Long lasting,energy efficient LED lights.
- 3、 Dusk to dawn sensor.
- 4、 Low voltage UL listed transformer.

- 1、 池塘内外均可使用。
- 2、 LED灯高效低能，寿命长。
- 3、 白天不工作，夜幕始工作。
- 4、 低压UL认证变压器。



Model: 3STD-Φ8LED

灯电压 Volt: 12V
 频率 Freq: 50/60Hz
 功率 Power: 1.5W
 灯时长 Bulb life: 50000H
 产品尺寸(LxWxH):100*91*62mm



Model: 5STD-Φ8LED

灯电压 Volt: 12V
 频率 Freq: 50/60Hz
 功率 Power: 1.5W
 灯时长 Bulb life: 50000H
 产品尺寸(LxWxH):100*91*62mm



GL09-00 → GL09-05

GL09-06 → GL09-10

- 1、 AC12V安全工作电压，不会对人体及鱼类造成伤害；
 - 2、 易安装易拆卸维修，可随意更换灯的工率；
 - 3、 可单独工作，亦可与其他低压水泵配套使用；
 - 4、 可按客户要求制作各种形状的钢条；
- 1、 Safe working voltage:AC 12V.no harm to humans and fish;
 - 2、 Easy to install,optional watts;
 - 3、 Work alone,also ideal for use with low voltage pumps as a set;
 - 4、 Optional shapes for different demands;

Model	Dimension	Voltage(V)	Power(W)
GL09-00	105x32x165mm	12V 50/60Hz	4/5/10/20W
GL09-01	184x32x425mm	12V 50/60Hz	4/5/10/20W
GL09-02	188x32x227mm	12V 50/60Hz	4/5/10/20W
GL09-03	187x32x192mm	12V 50/60Hz	4/5/10/20W
GL09-04	174x32x350mm	12V 50/60Hz	4/5/10/20W
GL09-05	139x32x75mm	12V 50/60Hz	4/5/10/20W
GL09-06	130x32x115mm	12V 50/60Hz	4/5/10/20W
GL09-07	130x32x139mm	12V 50/60Hz	4/5/10/20W
GL09-08	130x32x153mm	12V 50/60Hz	4/5/10/20W
GL09-09	130x32x365mm	12V 50/60Hz	4/5/10/20W
GL09-10	130x32x453mm	12V 50/60Hz	4/5/10/20W



Solar Lily Light







- 1、 Adds a touch of whimsy and illumination to your pond.
- 2、 Sunlight charges battery during the day.
- 3、 Dusk to dawn sensor.

- 1、 给你的池塘和喷泉增加一层奇异感观和独特的光照效果。
- 2、 在白天太阳能充电, 电池自动蓄电。
- 3、 光控自动控制, 在白天不工作, 夜幕降临开始工作。



Model: **Solar Lily Light**

Volt: 12V
 UVC-Power(W): 7W
 Size(DxH): φ240x120mm

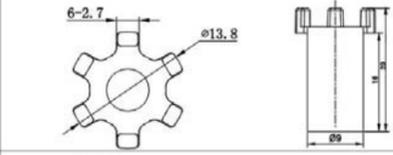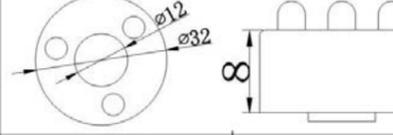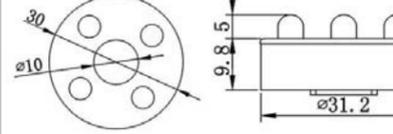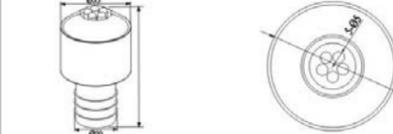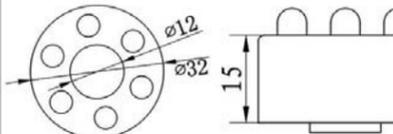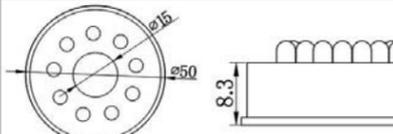LED LIGHTS		Model	Product facts
		1-LED	1 -Safe working voltage:AC 12V,no harm to humans and fish. 2 -Easy to install.optional watts. 3 -Different styles.optional colors. 4 -Low watts.energy saving and environment protected. 5 -Work alone.also ideal for use with low voltage pumps as a set. 一:AC 12V安全工作电压,不会对人体及鱼类造成伤害。 二:易安装易拆卸维修,可随意更换灯的功率。 三:款式多样,可选用多种颜色。 四:低功耗,节能环保。 五:可单独工作,亦可与其他低压水泵配套使用。
		3-LED	
		4-LED	
		5-LED	
		6-LED	
		9-LED	



ACCESSORIES

配件类产品



Model: **Fountain fogger**

产品尺寸(DxH):Φ112*66mm

- 1、LED lights can change color;create a mist from your fountain's water;
- 2、 Safe for outdoor use.
- 3、 Floats just below water surface.

- 1、 LED灯可以变色，从喷泉水面营造薄雾环绕的美景。
- 2、 户外也可安全使用。
- 3、 浮圈顶面与水平面持平。



Model: **Floating lily pad**

产品尺寸(LxWxH):200*150*40mm

- 1、 Add a realistic touch to any pond.
- 2、 Carefully remove back button to detach to detach lily from caod.Manipulate flower as desired for a natural look.

- 1、 放进池塘内，荷花给人非常真实的感觉。
- 将荷花底部的扣子拆开，从包装的卡片上拿出来，便可拥有你所渴望的真实而自然的荷花景色。



Model: **PVC liner**

- 1、 Easy installation.
- 2、 Fish safe.
- 3、 Puncture and UV resistant.
- 4、 Promotes beneficial microbial growth.
- 5、 Stronger than traditional PVC Liner.

- 1、 使用方便。
- 2、 不会对池塘里鱼类产生危害。
- 3、 耐晒防UV，有效预防开裂和穿孔。
- 4、 促进有益类微生物生长。
- 5、 内部结构细密，比传统PVC布更坚韧。




Model: **Pond planter**

产品尺寸(DxH):Φ228*105mm


- 1、 Unique way to enjoy aquatic plants,keep your plants healthy.
- 2、 Carefully remove back button to detach lily from card.Manipulate flower as desired for a natural look.

- 1、 用独特的方式种养水族植物，且让植物健康鲜艳，让你赏心悦目。
- 2、 漂浮在水面上，为鱼类提供阴凉避处。
- 3、 保护植物不受观赏鱼的破坏。

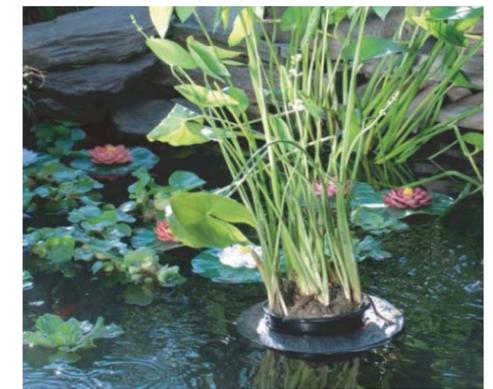

Filter pads



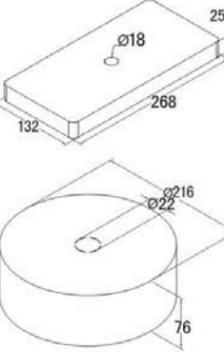


1 -Captures small particles and debris.
2 -Helps maintain crystal clear water ,Enhances biological filtration.
3 -Provides efficient water flow with less clogging for long lasting filtration.
4 -For fresh and salt water.
5 -Optional color.

一:有效过滤较小的沙石粒和碎片等。
二:有助保持水体清洁,提高生化过滤能力。
三:减少堵塞,水流通畅,延长过滤器寿命。
四:淡水和咸水均可使用。
五:多种颜色可供选择。

Pre-Filter



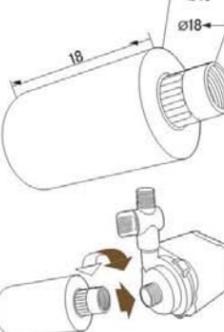


1 -Protects pumps from debris.
2 -Improves water quality.
3 -Filter attaches to pump inlet.
4 -Compatible with pump item #'s TPD-300, TPD-300H and TPD-400H.

一:过滤石粒和碎片,保护水泵。
二:改善水体质量,保持清洁。
三:直接安装于水泵入水口位置。
四:与 TPD-300, TPD-300H, TPD-400H 等水泵搭配使用。

Bioball



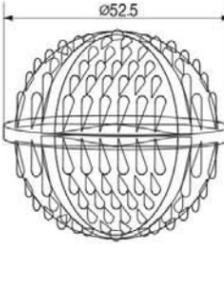


1 -Bioballs create a habitat for bacteria that feed on impurities in the water,the bacteria convert the impurities into nitrates that nourish plants in your pond.
2 -Can be used for filtration or in de-gassing towers.
3 -Easy to clean and maintain.

一:为水中的细菌提供栖息地,这些细菌可将水里的杂质和微生物转化成硝酸盐,为池塘里的植物提供养分。
二:可用于各种过滤器及气体处理塔。
三:易清洗易保养。

Plant bag



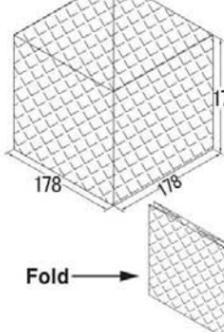


1 -Easy to use.
2 -Water passes through the bag carrying nutrients vital for plant growth.
3 -Prevents soil from escaping.
4 -Roots expand through the bag,making transplanting so much easier.
5 -Provides protection for fish.

一:简单易用。
二:水份可穿过植物袋为植物提供生长所必需的养分。
三:泥土不会从袋子里掉出来。
四:植物根部可延伸到袋子外,从而使移栽更方便。
三:一定程度上也保护了鱼的生长环境。

Skimmer fish net



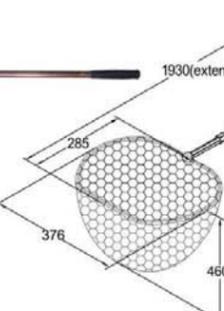

1 -Durable net,Heavy duty construction.
2 -Telescoping handle,easy for carry and storage.
3 -Non-slip plastic coated handle for a firm and secure grip.
4 -Easy to install, just screw the fish net into the handle.
5 -A good fishing tackle for anglers.

一:网丝结实耐用,结构坚固,专为承重而设计。
二:伸缩式手柄,易于拿捏和存放。
三:手柄表面塑料覆盖,拿得更稳更安全,不会滑手。
四:组装方便快捷,只需将鱼网旋转到手柄即可使用。
五:乃钓鱼者的理想装备。



INDOOR/OUTDOOR TRANSFORMER

户内、户外变压器

IMAGE	Model	Voltage (V AC)	Current (mA)	Power (W)	120V AC	230V AC	240V AC	240V AC	
					UL/CUL	GS/CE	SAA	BSI	
 12V-DC 1000mA	SKY35U/V/B/S 120100	12	100	1.2	✓	✓	✓	✓	
	SKY35U/V/B/S 120150	12	150	1.8		✓	✓	✓	
	SKY35U/V/B/S 120200	12	200	2.4	✓	✓	✓	✓	
	SKY35U/V/B/S 120250	12	250	3.0		✓	✓	✓	
	SKY35U/V/B/S 120300	12	300	3.6	✓	✓	✓	✓	
	SKY35U/V/B/S 120350	12	350	4.2		✓	✓	✓	
	SKY35U/V/B/S 120400	12	400	4.8	✓	✓	✓	✓	
	SKY35U/V/B/S 120420	12	420	5.04	✓	✓	✓	✓	
	SKY35U/V/B/S 120450	12	450	5.4	✓	✓	✓	✓	
	 12V-DC 150mA 1.8W	SKY41U/V/B/S 120500	12	500	6.0	✓	✓	✓	✓
SKY41U/V/B/S 120550		12	550	6.6		✓	✓	✓	
SKY41U/V/B/S 120600		12	600	7.2	✓	✓	✓	✓	
SKY41U/V/B/S 120650		12	650	7.8		✓	✓	✓	
SKY41U/V/B/S 120700		12	700	8.4	✓	✓	✓	✓	
SKY41U/V/B/S 120750		12	750	9.0		✓	✓	✓	
SKY41U/V/B/S 120800		12	800	9.6	✓	✓	✓	✓	
SKY41U/V/B/S 120830		12	830	9.96	✓	✓	✓	✓	
SKY41U/V/B/S 120900		12	900	10.8	✓	✓	✓	✓	
SKY41U/V/B/S 120950		12	950	11.4		✓	✓	✓	
 35/40UL	SKY41U/V/B/S 121000	12	1000	12	✓	✓	✓	✓	
	SKY48V/B/S 121100	12	1100	13.2		✓		✓	
	SKY48V/B/S 121200	12	1200	14.4		✓		✓	
	SKY48V/B/S 121300	12	1300	15.6		✓		✓	
	SKY48V/B/S 121400	12	1400	16.8		✓		✓	
	SKY48V/B/S 121500	12	1500	18		✓		✓	
	SKY48V/B/S 121600	12	1600	19.2		✓		✓	
	SKY48V/B/S 121670	12	1670	20.04		✓		✓	
	SKY48V/B/S 121700	12	1700	20.4		✓		✓	
	SKY48V/B/S 121800	12	1800	21.6		✓		✓	
 41/48UL	SKY57V/B/S 121800	12	1800	21.6		✓	✓	✓	
	SKY57V/B/S 121900	12	1900	22.8		✓	✓	✓	
	SKY57V/B/S 122000	12	2000	24		✓	✓	✓	
	SKY57V/B/S 122100	12	2100	25.2		✓	✓	✓	
	SKY57V/B/S 122200	12	2200	26.4		✓	✓	✓	
	SKY57V/B/S 122300	12	2300	27.6		✓	✓	✓	
	SKY57V/B/S 122400	12	2400	28.8		✓	✓	✓	
	SKY57V/B/S 122500	12	2500	30		✓	✓	✓	
	SKY57V/B/S 122600	12	2600	31.2		✓	✓	✓	
	SKY57V/B/S 122700	12	2700	32.4		✓	✓	✓	
 57SAA /57BS	SKY57V/B/S 122800	12	2800	33.6		✓	✓	✓	
	SKY57V/B/S 122900	12	2900	34.8		✓	✓	✓	
	SKY57V/B/S 123000	12	3000	35		✓	✓	✓	
	SKY57V/B/S 123100	12	3100	37.2		✓	✓	✓	
	SKY57V/B/S 123200	12	3200	38.4		✓	✓	✓	
	 35BS	SKY57V/B/S 123300	12	3300	39.6		✓	✓	✓

INDOOR/OUTDOOR TRANSFORMER

户内、户外变压器

IMAGE	Model	Voltage (V AC)	Current (mA)	Power (W)	120V AC	230V AC	240V AC	240V AC
					UL/CUL	GS/CE	SAA	BSI
 41BS	SKYO41U/V/B/S 120050	12	50	0.6	✓	✓		
	SKYO41U/V/B/S 120100	12	100	1.2	✓	✓		
	SKYO41U/V/B/S 120150	12	150	1.8	✓	✓		
	SKYO41U/V/B/S 120200	12	200	2.4	✓	✓		
	SKYO41U/V/B/S 120250	12	250	3.0	✓	✓		
	SKYO41U/V/B/S 120300	12	300	3.6	✓	✓		
	SKYO41U/V/B/S 120350	12	350	4.2	✓	✓		
	SKYO41U/V/B/S 120400	12	400	4.8	✓	✓		
	SKYO41U/V/B/S 120420	12	420	5.04	✓	✓		
	SKYO41U/V/B/S 120450	12	450	5.4	✓	✓		
 48BS	SKYO41U/V/B/S 120500	12	500	6.0	✓	✓		
	SKYO41U/V/B/S 120600	12	600	7.2	✓	✓		
	SKYO41U/V/B/S 120700	12	700	8.4	✓	✓		
	SKYO41U/V/B/S 120800	12	800	9.6	✓	✓		
	SKYO41U/V/B/S 120830	12	830	9.96	✓	✓		
	SKYO41U/V/B/S 120900	12	900	10.8	✓	✓		
	SKYO41U/V/B/S 120950	12	950	11.4	✓	✓		
	SKYO41U/V/B/S 121000	12	1000	12	✓	✓		
	SKYO41U/V/B/S 121100	12	1100	13.2	✓	✓		
	SKYO41U/V/B/S 121200	12	1200	14.4	✓	✓		
 35GS	SKYO48U/V/B/S 120800	12	800	9.6	✓	✓		
	SKYO48U/V/B/S 120900	12	900	10.8	✓	✓		
	SKYO48U/V/B/S 121000	12	1000	12	✓	✓		
	SKYO48U/V/B/S 121100	12	1100	13.2	✓	✓		
	SKYO48U/V/B/S 121200	12	1200	14.4	✓	✓		
	SKYO48U/V/B/S 121300	12	1300	15.6	✓	✓		
	SKYO48U/V/B/S 121400	12	1400	16.8	✓	✓		
	SKYO48U/V/B/S 121500	12	1500	18	✓	✓		
	SKYO48U/V/B/S 121600	12	1600	19.2	✓	✓		
	SKYO48U/V/B/S 121670	12	1670	20.04	✓	✓		
 41GS (48GS(outdoor))	SKYO48U/V/B/S 121700	12	1700	20.4	✓	✓		
	SKYO48U/V/B/S 121800	12	1800	21.6	✓	✓		
	SKYO48U/V/B/S 121900	12	1900	22.8	✓	✓		
	SKYO48U/V/B/S 122000	12	2000	24	✓	✓		
	SKYO48U/V/B/S 122100	12	2100	25.2	✓	✓		
	SKYO48U/V/B/S 122200	12	2200	26.4	✓	✓		
	SKYO57U/V/B/S 121600	12	1600	19.2	✓	✓	✓	
	SKYO57U/V/B/S 121800	12	1800	21.6	✓	✓	✓	
	SKYO57U/V/B/S 121900	12	1900	22.8	✓	✓	✓	
	SKYO57U/V/B/S 122000	12	2000	24	✓	✓	✓	
 48GS	SKYO57U/V/B/S 122100	12	2100	25.2	✓	✓	✓	
	SKYO57U/V/B/S 122200	12	2200	26.4	✓	✓	✓	
	SKYO57U/V/B/S 122300	12	2300	27.6	✓	✓	✓	
	SKYO57U/V/B/S 122400	12	2400	28.8	✓	✓	✓	
	SKYO57U/V/B/S 122500	12	2500	30	✓	✓	✓	
	SKYO57U/V/B/S 122600	12	2600	31.2	✓	✓	✓	
	SKYO57U/V/B/S 122700	12	2700	32.4	✓	✓	✓	
	SKYO57U/V/B/S 122800	12	2800	33.6	✓	✓	✓	
	SKYO57U/V/B/S 122900	12	2900	34.8	✓	✓	✓	
	SKYO57U/V/B/S 123000	12	3000	36	✓	✓	✓	
 57/66/76GS	SKYO57U/V/B/S 123100	12	3100	37.2	✓	✓	✓	
	SKYO57U/V/B/S 123200	12	3200	38.4	✓	✓	✓	
	SKYO57U/V/B/S 123300	12	3300	39.6	✓	✓	✓	
	SKYO57U/V/B/S 123400	12	3400	40.8	✓	✓	✓	
	SKYO57U/V/B/S 123500	12	3500	42	✓	✓	✓	
	SKYO-66V/B/S 124800	12	4800	57.6	✓			
	SKYO-66V/B/S 125000	12	5000	60		✓		
	SKYO-66V/B/S 128000	12	8000	96		✓		
	SKYO-66V/B/S 1215000	12	15000	180		✓		