

NOTES: UNLESS OTHERWISE SPECIFIED

1. -OA1- IS THE THEORETICAL OPTIC AXIS OF THE FIRST OPTIC SURFACE.
2. -OA2- IS THE THEORETICAL OPTIC AXIS OF THE SECOND OPTIC SURFACE.
3. ASPHERIC SURFACES ARE DEFINED BY:

$$z(r) = \frac{r^2/R_c}{1 + \sqrt{1 - (1 + K)(r/R_c)^2}} + \sum_i A_{2i} r^{2i}$$

WHERE: Y= RADIAL DISTANCE FROM VERTEX IN mm



- #### 4. SURFACE DEFINITIONS:

	SURFACE 1	SURFACE 2
TYPE	ASPHERE	SPHERE
SHAPE	CX	CX
CA	$\emptyset 1.50$	$\emptyset 1.40$
R _C	1.023643	-4.063804
K	-0.364884	0.000000
A ₂	0.000000E0	0.000000E0
A ₄	-4.520851E-2	0.000000E0
A ₆	-3.688360E-2	0.000000E0
A ₈	-2.000566E-2	0.000000E0
A ₁₀	-8.069143E-3	0.000000E0
A ₁₂	0.000000E0	0.000000E0
A ₁₄	0.000000E0	0.000000E0
A ₁₆	0.000000E0	0.000000E0

- ## 5. NOMINAL DESIGN PARAMETERS.

DESIGN WAVELENGTH	1550 nm
W.D.	1.1 mm
N.A.	0.5
E.F.L.	1.5mm $\pm$ 1.0%

6. FEATURES IDENTIFIED AS 6 ARE CRITICAL CHARACTERISTICS.
CRITICAL CHARACTERISTICS ARE GUARANTEED IN PRODUCTION.
7. THIS ELEMENT MUST MEET THE SCRATCH/DIG REQUIREMENTS ACROSS THE FULL CLEAR
APERTURES INDICATED, BOTH SIDES, PER LIGHTPATH PWI INS-8.2-05P6.6
-00: S/D: 40/20
8. THIS ELEMENT IS USED AS A COLLIMATING LENS.
WAVEFRONT ERROR: @ 100% APERTURE < 0.173 WAVES RMS @ 632.8nm;
@ 50% APERTURE < 0.270 WAVES P-V.
PER LIGHTPATH PWI INS-8.2-13.6

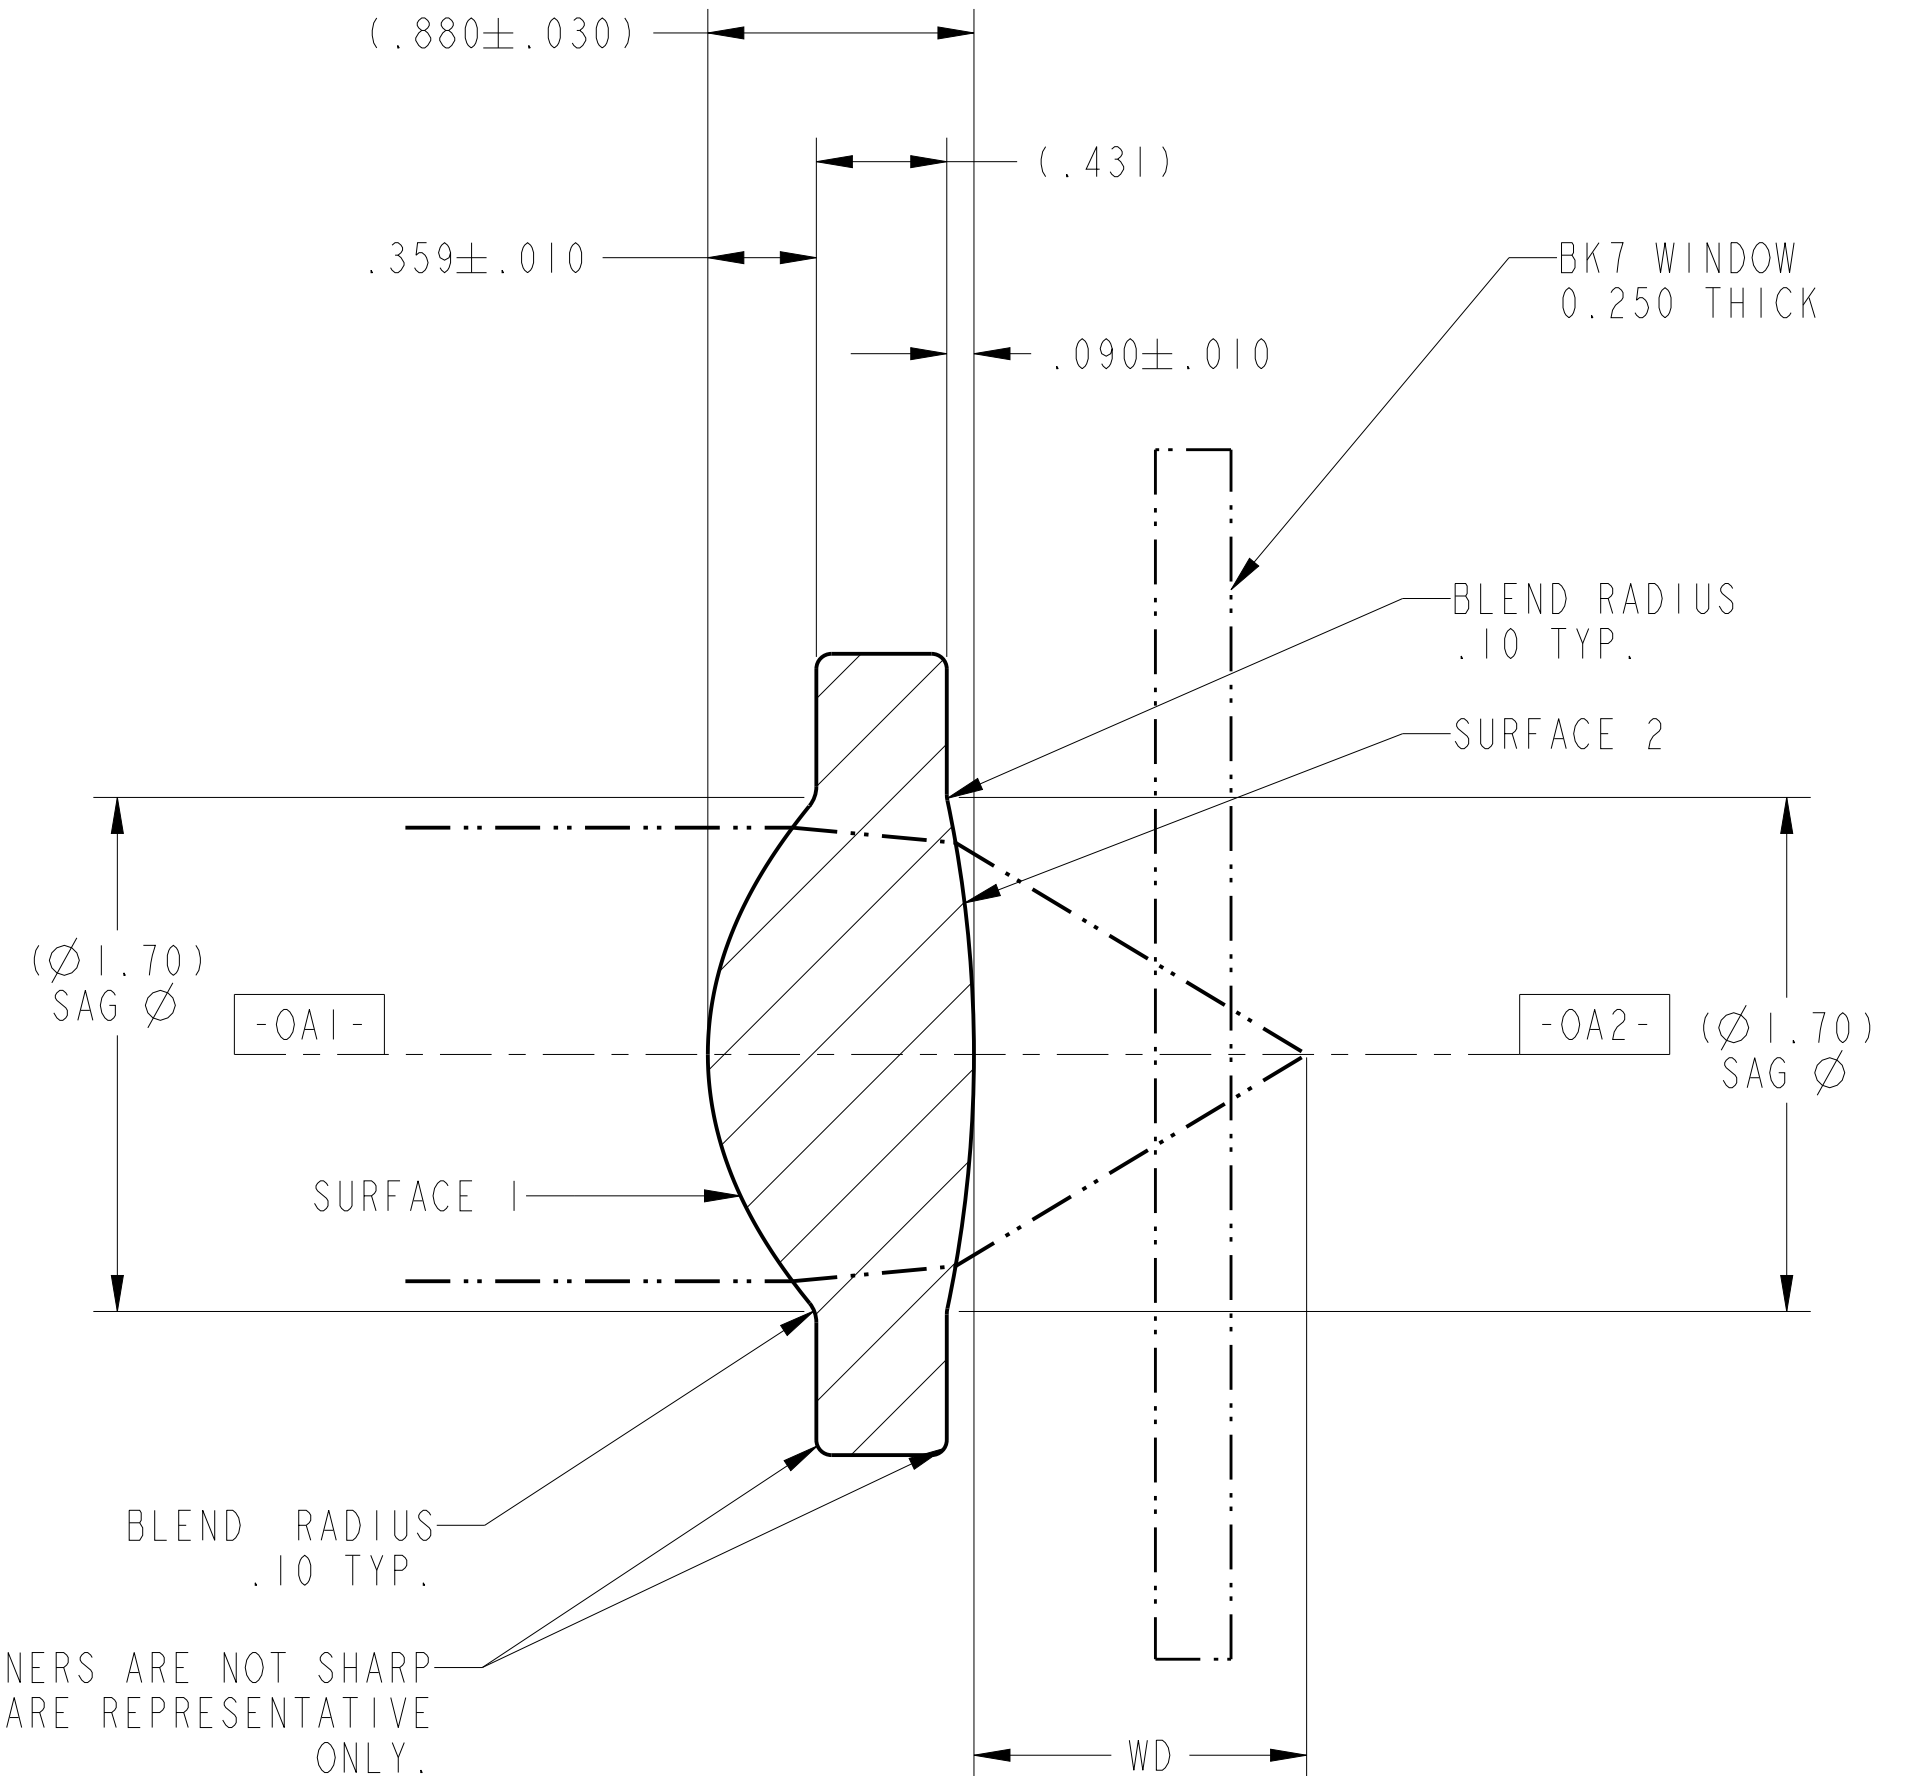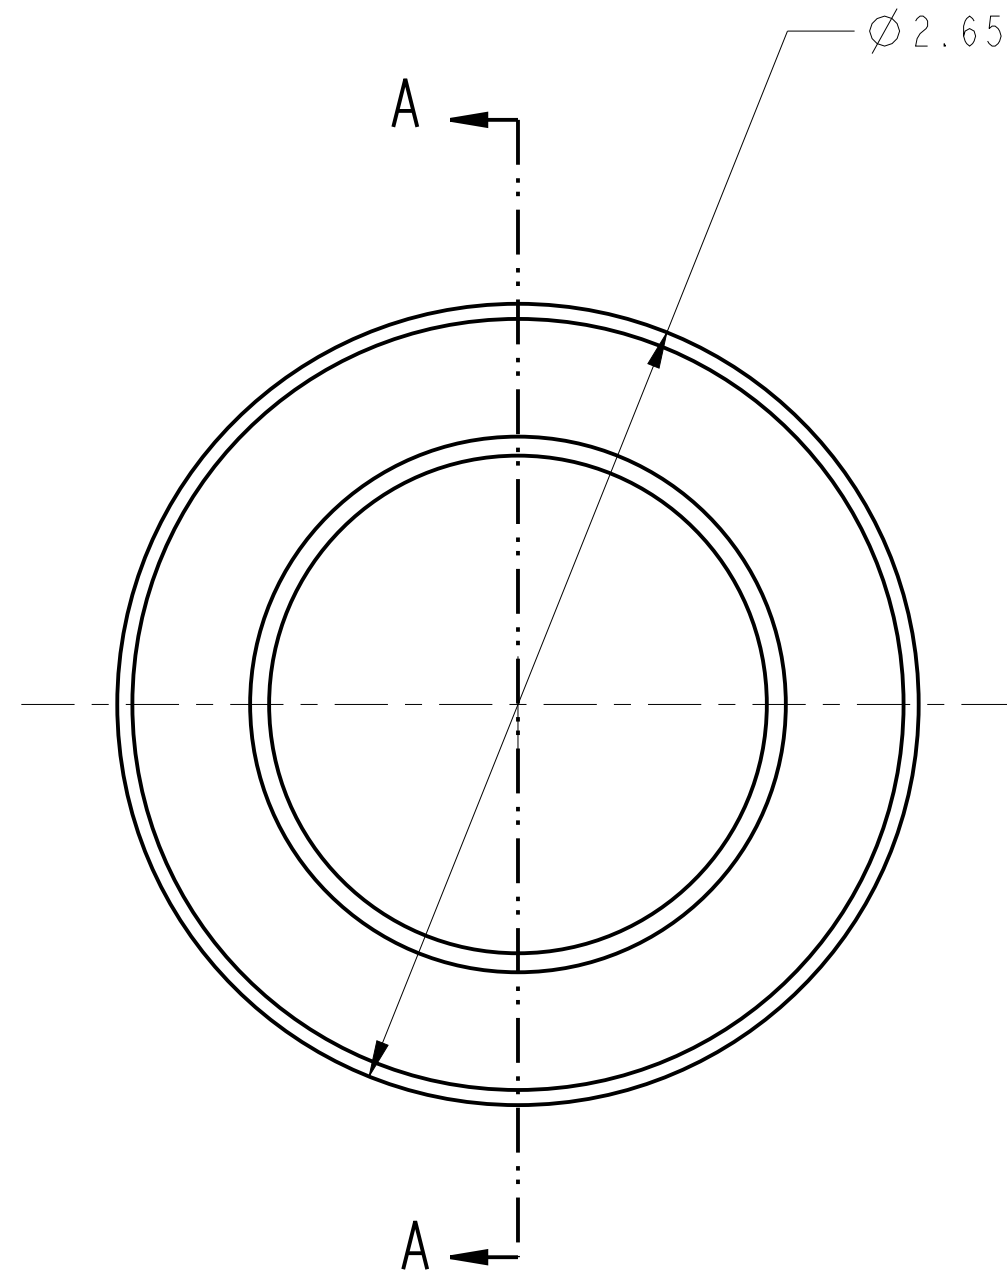

SECTION A - A

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM. DECIMAL TOLERANCES ARE: .X ± 0.25 .XX ± 0.10 .XXX ± 0.025 .XXXX ± 0.013 ANGLES: ± 0.5°		 2603 CHALLENGER TECH CT, SUITE 100 ORLANDO, FL 32826		PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF LIGHTPATH TECHNOLOGIES AND IS NOT TO BE DISCLOSED OR REPRODUCED IN WHOLE OR PART, OR USED FOR MANUFACTURING FOR ANYONE OTHER THAN LIGHTPATH TECHNOLOGIES WITHOUT ITS WRITTEN CONSENT. NO RIGHT IS GRANTED TO DISCLOSE OR USE ANY INFORMATION CONTAINED IN SAID DOCUMENT.	
DRAWN BAUZ\ORL		TITLE LENS CODE 352710			
MATERIAL ECO550(m)		SIZE A2	DWG NO 0352710		REV D
SOFTWARE Pro/ENGINEER		SCALE: 40.00	THIRD ANGLE PROJECTION 		SHEET 1 OF 1

