

NOTES: UNLESS OTHERWISE SPECIFIED

1. **-OAI-** IS THE THEORETICAL OPTIC AXIS OF THE FIRST OPTIC SURFACE.
2. ASPHERIC SURFACES ARE DEFINED BY:

$$z(r) = \frac{r^2/R_c}{1 + \sqrt{1 - (1 + K)(r/R_c)^2}} + \sum_i A_{2i}r^{2i}$$

WHERE: r = RADIAL DISTANCE FROM VERTEX IN mm

3. SURFACE DEFINITIONS:

	SURFACE 1	SURFACE 2
TYPE	ASPHERE	PLANO
SHAPE	CX	PL
CA	Ø 2.46	Ø 1.43
R _C	1.330127	PLANO
K	-0.999999	0.000000
A ₂	0.000000E0	0.000000E0
A ₄	2.644445E-2	0.000000E0
A ₆	3.370898E-3	0.000000E0
A ₈	4.921768E-4	0.000000E0
A ₁₀	7.950552E-5	0.000000E0
A ₁₂	6.845305E-6	0.000000E0
A ₁₄	3.593427E-6	0.000000E0
A ₁₆	-2.433953E-7	0.000000E0



4. NOMINAL DESIGN PARAMETERS:

DESIGN WAVELENGTH	520nm
W.D.	1.35mm
N.A.	0.50
E.F.L.	2.67mm

5. FEATURES IDENTIFIED AS Ⓢ ARE CRITICAL CHARACTERISTICS. CRITICAL CHARACTERISTICS ARE GUARANTEED IN PRODUCTION.
6. THIS ELEMENT MUST MEET THE SCRATCH/DIG REQUIREMENTS ACROSS THE FULL CLEAR APERTURES INDICATED, BOTH SIDES, PER LIGHTPATH PWI INS-8.2-05P6.Ⓢ
-00: S/D: 40/20
7. THIS ELEMENT IS USED AS A COLLIMATING LENS.
WAVEFRONT ERROR: < 0.071 WAVES RMS @ 632.8nm
PER LIGHTPATH PWI INS-8.2-03.



REVISION HISTORY				
REV	DCO	DESCRIPTION	DATE	INITIALS
A	6232	INITIAL RELEASE	07/06/20	MPW
B	6469	ADDED WFE SPEC	03/10/21	MPW

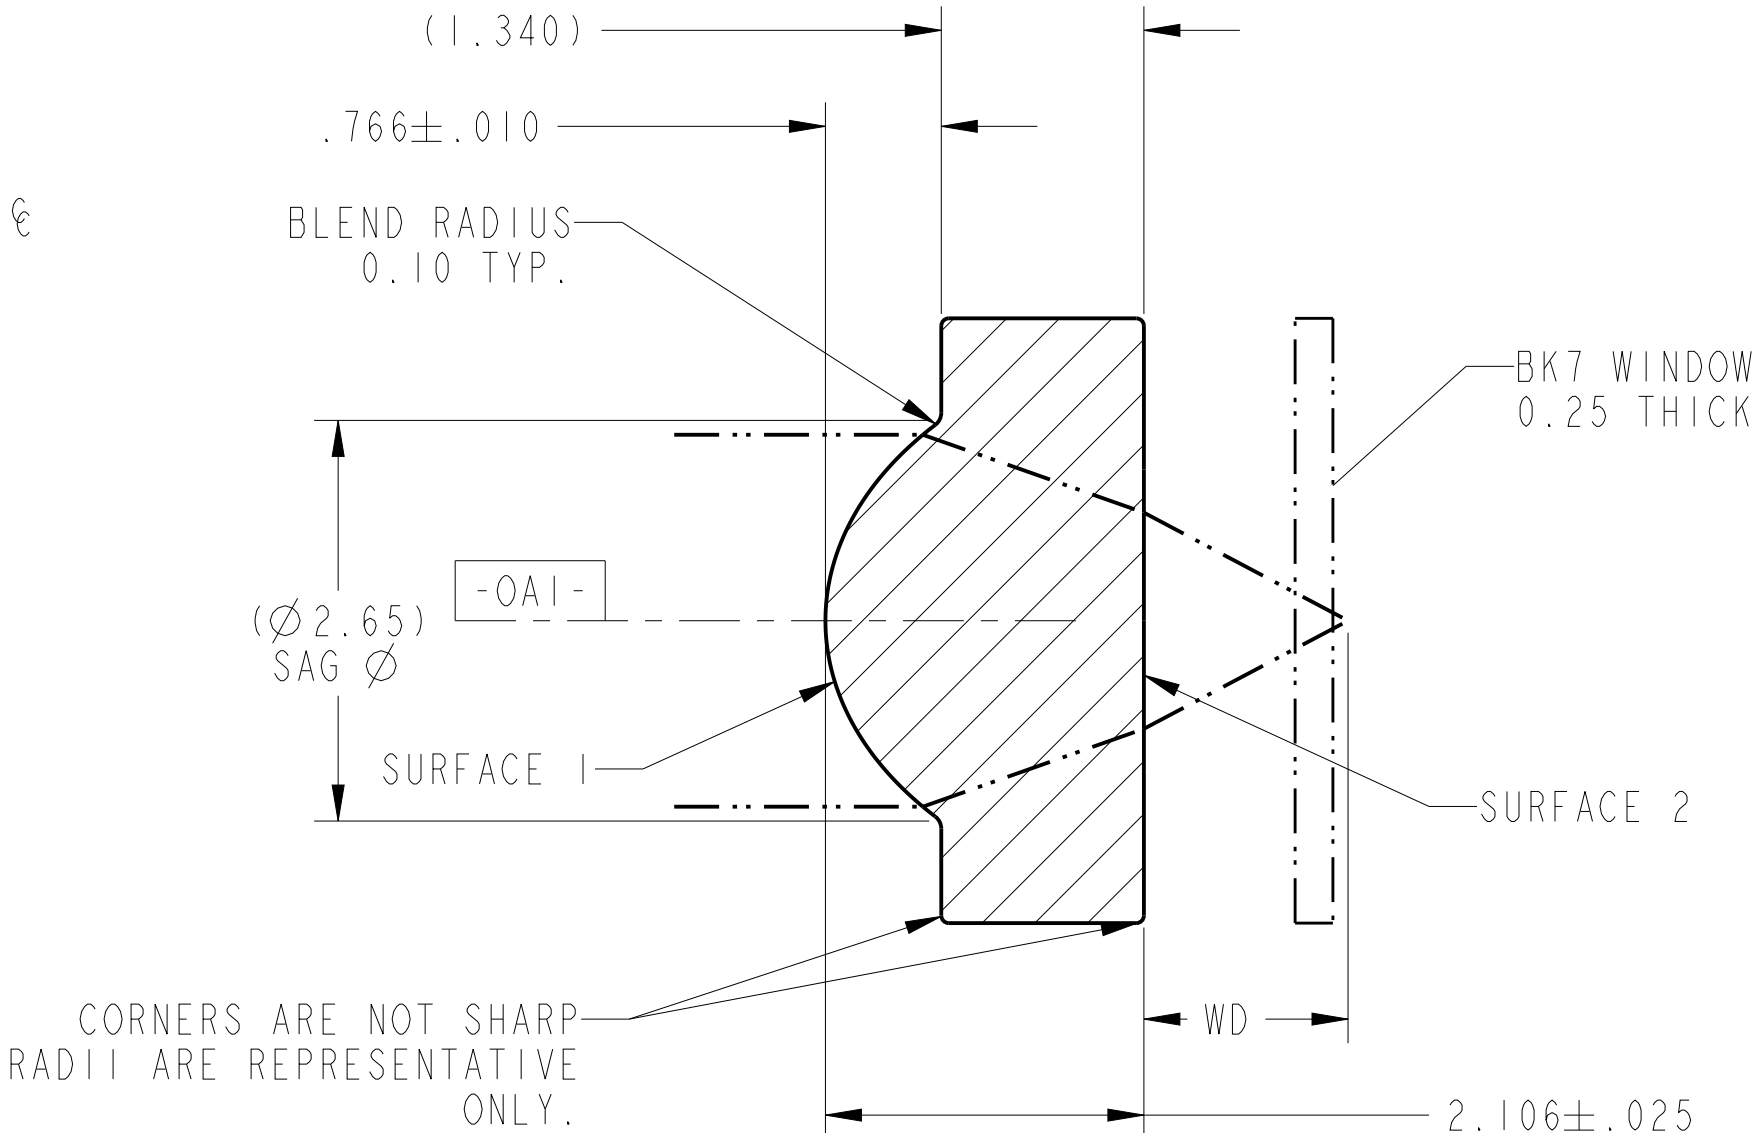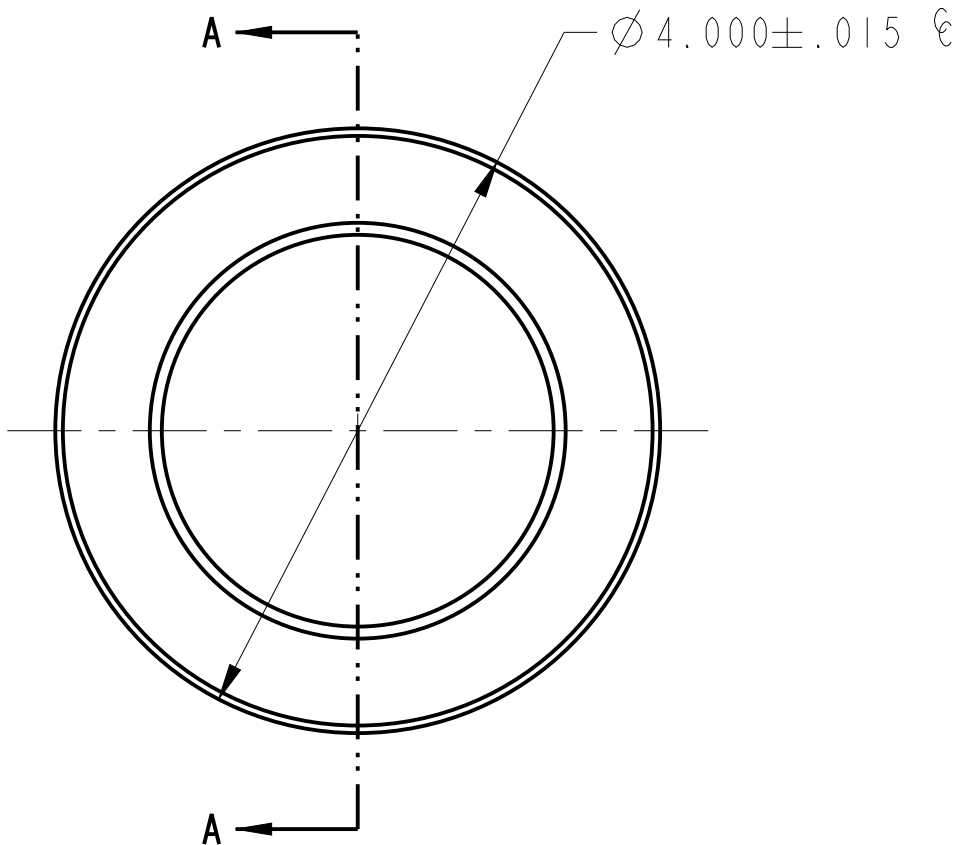

SECTION A-A

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM. DECIMAL TOLERANCES ARE: .X ± 0.25 .XX ± 0.10 .XXX ± 0.025 .XXXX ± 0.013 ANGLES: ± 0.5°		LightPath TECHNOLOGIES 2603 CHALLENGER TECH CT. SUITE 100 ORLANDO, FL 32826		PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF LIGHTPATH TECHNOLOGIES AND IS NOT TO BE DISCLOSED OR REPRODUCED IN WHOLE OR PART, OR USED FOR MANUFACTURING FOR ANYONE OTHER THAN LIGHTPATH TECHNOLOGIES WITHOUT ITS WRITTEN CONSENT. NO RIGHT IS GRANTED TO DISCLOSE OR USE ANY INFORMATION CONTAINED IN SAID DOCUMENT.	
DRAWN MPW\ORL		TITLE LENS CODE 353216			
MATERIAL H-FK61(m)		SIZE A2	DWG NO 0353216		REV B
SOFTWARE Pro/ENGINEER		SCALE: 20.00	THIRD ANGLE PROJECTION 		SHEET 1 OF 1