

F

E

D

C

B

A

F

E

D

REV

SH

DWG NO
0355860

A

NOTES: UNLESS OTHERWISE SPECIFIED

1. -OAI- IS THE THEORETICAL OPTIC AXIS OF THE FIRST OPTIC SURFACE.
2. ASPHERIC SURFACES ARE DEFINED BY:

$$z(r) = \frac{r^2/R_c}{1 + \sqrt{1 - (1 + K)(r/R_c)^2}} + \sum_i A_{2i} r^{2i}$$

WHERE: r = RADIAL DISTANCE FROM VERTEX IN mm




3. SURFACE DEFINITIONS:

	SURFACE 1	SURFACE 2
TYPE	ASPHERE	PLANO
SHAPE	CX	PL
CA	Ø1.25	Ø1.05
R _C	1.535350	PLANO
K	-0.999999	0.000000
A ₂	0.000000E0	0.000000E0
A ₄	1.378180E-2	0.000000E0
A ₆	-2.057370E-5	0.000000E0
A ₈	-2.030110E-4	0.000000E0
A ₁₀	-3.333490E-5	0.000000E0
A ₁₂	3.397910E-6	0.000000E0
A ₁₄	0.000000E0	0.000000E0
A ₁₆	0.000000E0	0.000000E0

4. NOMINAL DESIGN PARAMETERS (FOR REFERENCE ONLY):

DESIGN WAVELENGTH	1310nm
W.D.	1.35mm
N.A.	0.3
E.F.L.	1.97mm

5. FEATURES IDENTIFIED AS Ⓔ ARE CRITICAL CHARACTERISTICS. CRITICAL CHARACTERISTICS ARE GUARANTEED IN PRODUCTION.
6. THIS ELEMENT MUST MEET THE SCRATCH/DIG REQUIREMENTS ACROSS THE FULL CLEAR APERTURES INDICATED, BOTH SIDES, PER LIGHTPATH PWI INS-8.2-05P6.Ⓔ
-00: S/D: 40/20
7. THIS ELEMENT IS USED AS A COLLIMATING LENS.
WAVEFRONT ERROR: @100% APERTURE <0.100 WAVES RMS @ 632.8 nm;
@ 50% APERTURE < 0.250 WAVES P-V
PER LIGHTPATH PWI INS-8.2-13.Ⓔ

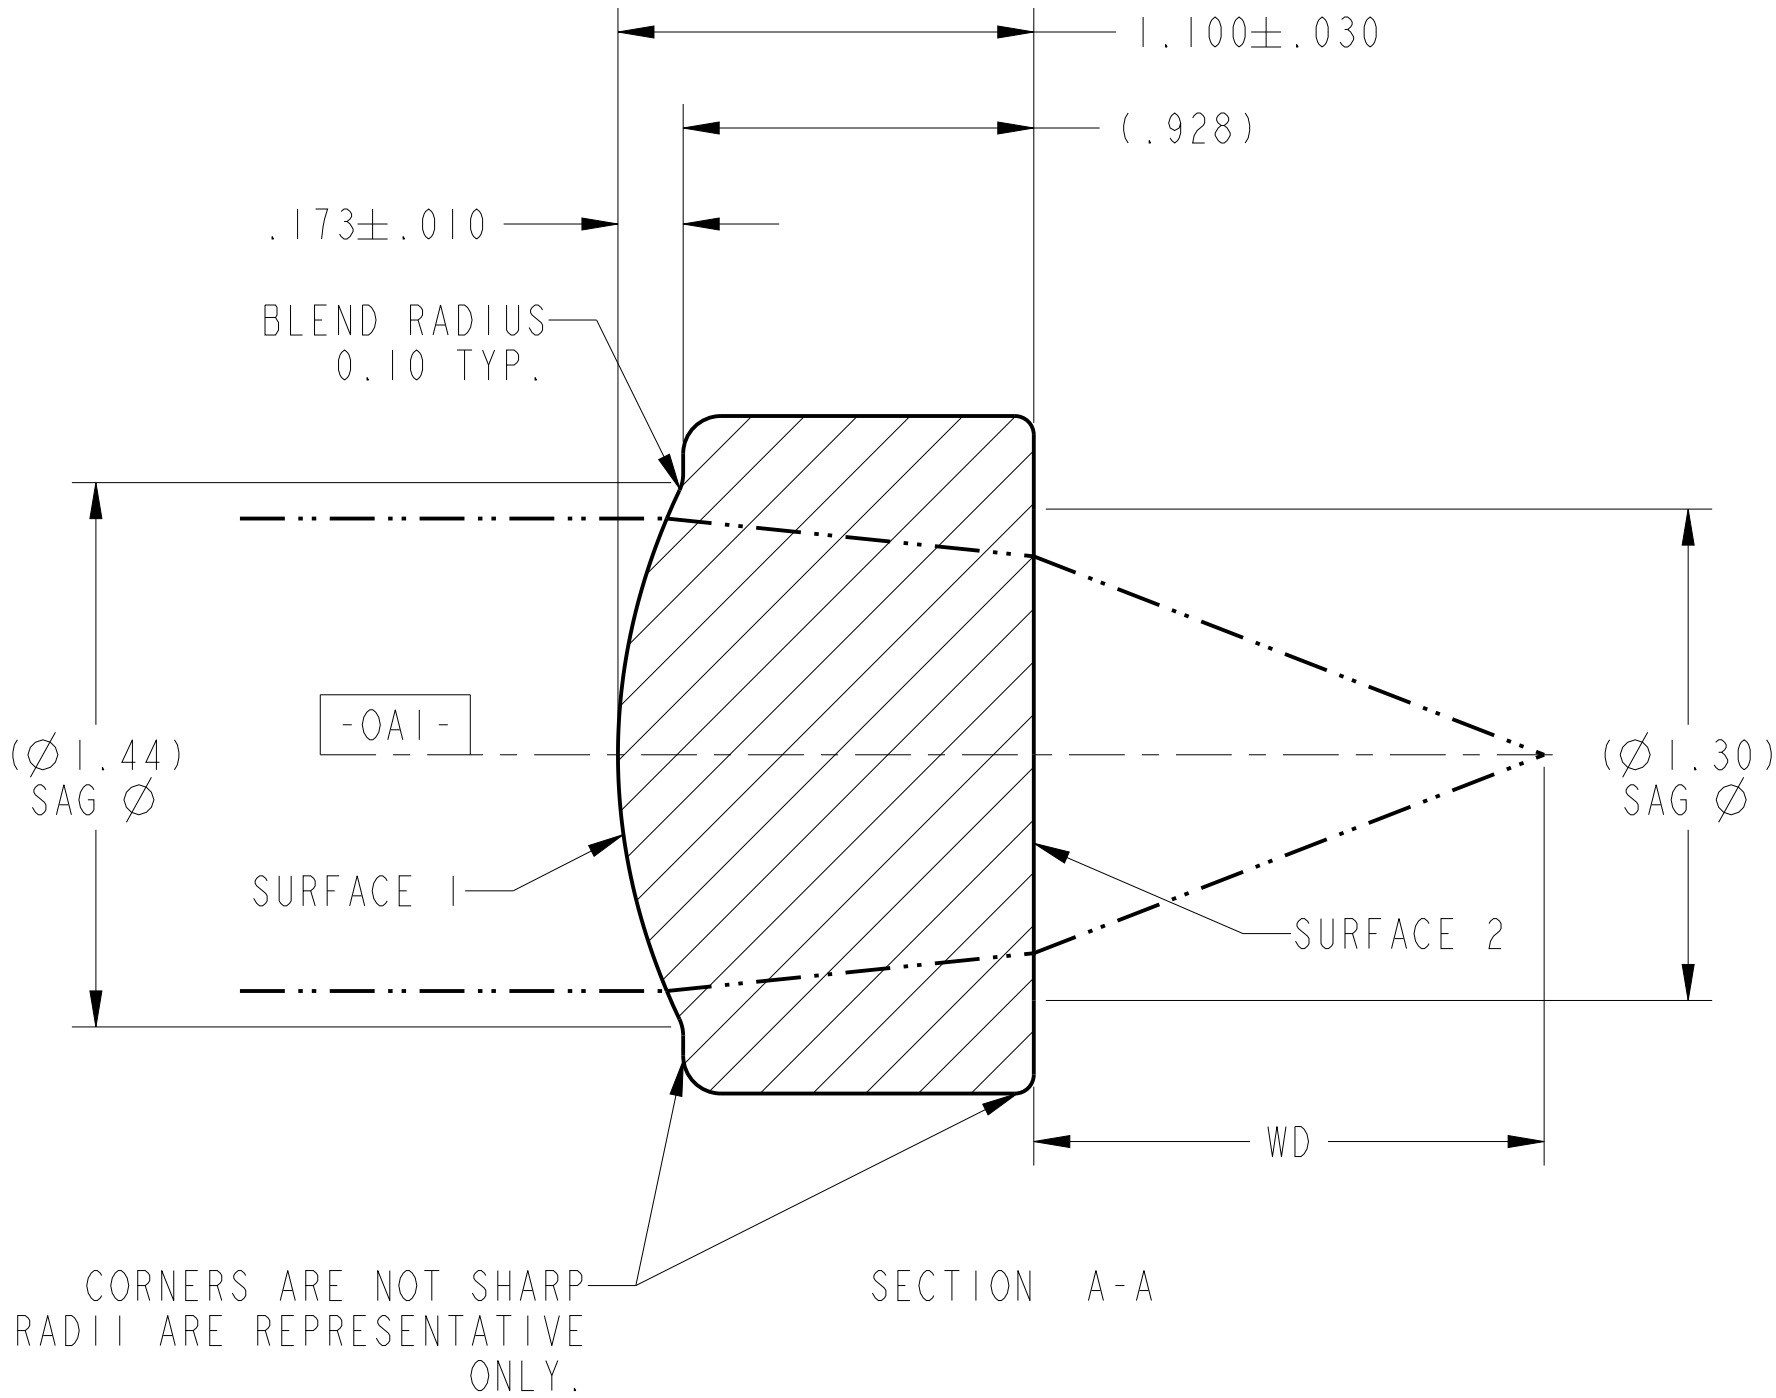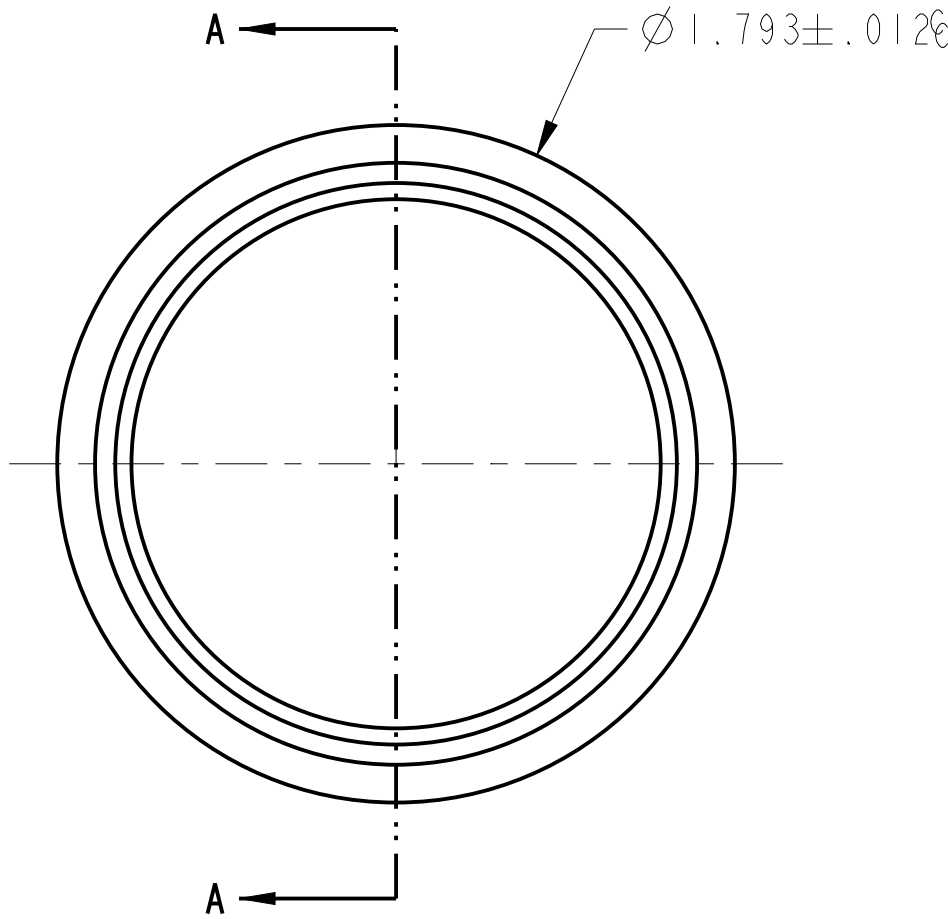

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM. DECIMAL TOLERANCES ARE: .X ± 0.25 .XX ± 0.10 .XXX ± 0.025 .XXXX ± 0.013 ANGLES: ± 0.5°		LightPath TECHNOLOGIES 2603 CHALLENGER TECH CT. SUITE 100 ORLANDO, FL 32826		PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF LIGHTPATH TECHNOLOGIES AND IS NOT TO BE DISCLOSED OR REPRODUCED IN WHOLE OR PART, OR USED FOR MANUFACTURING FOR ANYONE OTHER THAN LIGHTPATH TECHNOLOGIES WITHOUT ITS WRITTEN CONSENT. NO RIGHT IS GRANTED TO DISCLOSE OR USE ANY INFORMATION CONTAINED IN SAID DOCUMENT.	
		TITLE LENS CODE 355860			
DRAWN CL\ORL	SIZE A2	DWG NO 0355860		REV B	
MATERIAL D-ZLAF52LA(m)	SCALE: 50.00	THIRD ANGLE PROJECTION 		SHEET 1 OF 1	
SOFTWARE Pro/ENGINEER					