


CX165F-50A系列 Series

太阳能继电器
Solar relay

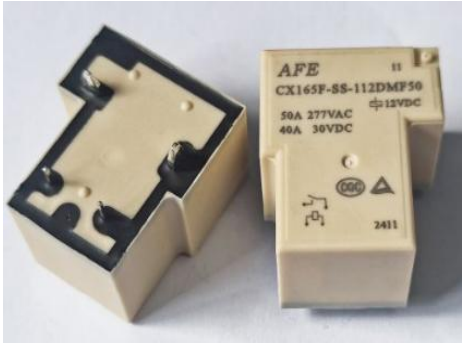

产品特点

product features

●50A触点切换能力

High contac capacity50A Contact switching capability

●可供触点或线圈间耐压达4000VAC耐浪涌电压6000VAC(1.2/50US)的特殊继电器
It can be used as a special relay with withstand voltage of 4000VAC and surge voltage of 6000VAC(1.2/50US)between contacts or coils

●适用于太阳能光伏发电逆变器

Applicable to solar photovoltaic power generaion invertre

●可直接焊接在印刷线路板中

It can be directly welded in the printed circuit board

触点负载 Contact Rating	
触点形式contact form	1H
触点材料 contact material	AgSnO2
接触压降 ⁽¹⁾ Contact voltahe drop	最大值: 100mA (10A 13.5VDC下测量)
触点负载	50A 277VAC
最大切换电流 ⁽²⁾ Max. switching	50A
最大切换电压 Max. switching	277VAC
最大切换功率 Max. switching power	13850VA
机械耐久性Mechanical	1×10 ⁶ 次
电耐久性 Electrical durability	3×10 ⁴ 次 (15A导通-50A载流-15A 断开277VAC阻性负载常温1s通 9s断) 3×10 ⁴ 次 (40A 277VAC, 阻性负载 常温1s通9s断,)

备注: 1. 上述值为初始值
remarks:The above values are initial values
2. 继电器引出的电路应设计足够的载流截面, 避免发生过热现象
The circuit from the relay shall be designed with
sufficient
current carrying section to avoid overheating
3. 对于塑封型产品试验时, 应打开外壳上的透气孔
When experimenting with plastic encapsulated
products,the vent holes on the housing should
be opened

安规认证 Safety certification	
CQC CQC11002061851	50A 277VAC 40A 30VDC
TUV R 50267516	

性能参数Performance Parameter		
绝缘电阻 Insulation resistance		1000MΩ (500VDC)
吸合时间 (额定电压下) Operate Time		≤15ms
释放时间 (额定电压下) Release Time		≤10ms
介质耐压 Dielectric Strength	触点与触点间BOC	1500VAC 1分钟
	触点与线圈间BCC	2500VAC 1分钟
浪涌电压 (线圈与触点间) Surge voltage (BCC)		6KV (1.2/50us)
线圈温升 Coil temperature rise		≤90K (触点负载电流50A, 额定 电压激励, 环境温度65℃)
抗振动		10Hz~55Hz 双振幅1.5mm
冲击 Shock	稳定性 Error Operation	98m/s ²
	强度 Endurance	980m/s ²
湿度humidity		5%~85%RH
温度范围 Temperature Range		-40℃~105℃ (不结冰) (NO freezing)
引出端形式 Lead out terminal form		印制板式 Printed board
重量Weight		约36克 about36g
封装方式 Type of Sealing		塑封型、防焊剂型 The flux type

典型用途Typical use	
●用于光伏电源、UPS电源、充电桩、电动汽车、电子设备空调 等大电流切换电路 Used for photovoltaic power supply,UPS power supply,charging pile,electric vehicle,electronic equipment,air conditioner and other high current seitching appliances	

线圈参数Coil Specification (at 20 °C)

额定电压 Nominal Voltage (VDC)	动作电压 Action voltage (VDC)	释放电压 Drop-Out Voltage (Min)VDC	最大电压 Maximum Voltage (Max)VDC	线圈电阻 Coil Resistance ($\Omega \pm 10\%$)	额定功率 Rated power (w)
5	≤ 4	≥ 0.35	6.5	$16.6 \times (1 \pm 10\%)$	约:1.5W
6	≤ 4.8	≥ 0.42	7.8	$24 \times (1 \pm 10\%)$	
12	≤ 9.6	≥ 0.84	15.6	$96 \times (1 \pm 10\%)$	
24	≤ 19.2	≥ 1.68	31.2	$384 \times (1 \pm 10\%)$	
48	≤ 38.4	≥ 3.36	62.4	$1536 \times (1 \pm 10\%)$	
5	≤ 4	≥ 0.35	6.5	$11.1 \times (1 \pm 10\%)$	约:2.25W
6	≤ 4.8	≥ 0.42	7.8	$16 \times (1 \pm 10\%)$	
12	≤ 9.6	≥ 0.84	15.6	$64 \times (1 \pm 10\%)$	
24	≤ 19.2	≥ 1.68	31.2	$256 \times (1 \pm 10\%)$	
48	≤ 38.4	≥ 3.36	62.4	$1024 \times (1 \pm 10\%)$	

备注: 1. 上述值为初始值

remarks:The above values are initial values

2. 最大电压是指继电器线圈在短时间内能够承受的最大值。

The maximum voltage refers to the maximum value that the relay coil can withstand in a short time

订货标记

CX165F - SS - 1 12 D M F 50 xxx

特殊号: 无-标准型, 字母或数字-特殊要求
负载大小 50:50A 60:60A

绝缘等级 F:F 级
触点形式: M:常开型

线圈功耗: P:高功耗型(约 2.25W)
D:标准型 (约 1.5W)

线圈电压: 05:5V,06:6V,09:9V,12:12V, 24:24V
24:24V,48:48V

触点组数: 1:1 组

密封方式: SS:防焊剂型

品名: CX165F

备注:

1. 在洁净环境 (不含H₂S、SO₂、NO₂、粉尘等污染物) 下使用时, 推荐使用防焊剂型产品
2. 在污染环境 (含一定量 的H₂S、SO₂、NO₂ 粉尘等污染物) 下使用时建议选用塑封型产品, 并请在实际使用中进行确认。
3. 当继电器装入PCB板焊接后, 如需进行整体清洗或表面处理, 请与我司联系, 以便商定合适的焊接条件、合适的产品规格。

remark

- (1)When using in clean enbironment (without H₂S SO₂ NO₂ dust and other pollutants),it is recommended to Use flux resistant products
- (2). When using in polluted environ ment(with a certain amount of H₂S SO₂ NO₂dust and other pollutants), it is recom mended to use plastic encapsulated products.please confirm in actual use.
- (3)After the relay is installed into the PCB board for welding, if it needs overall cleaning or surface treatment, please Contact me to negotiate the appropriate welding conditions and product specifications.

CX165F-50A系列 Seris


太阳能继电器
Solar relay

类型 category


型号	CX165F-50A	
线圈灵敏度 Coil sensitivity	标准直流线圈 Standare DC coil	
	1A	
防焊剂型 The flux type	CX165F-SS-1□□DMF50	CX165F-SS-1□□PMF50

外形尺寸、接线、安装孔位图
Overall dimension,wiring and installation hole bitmap


外形尺寸
Outline Dimensions

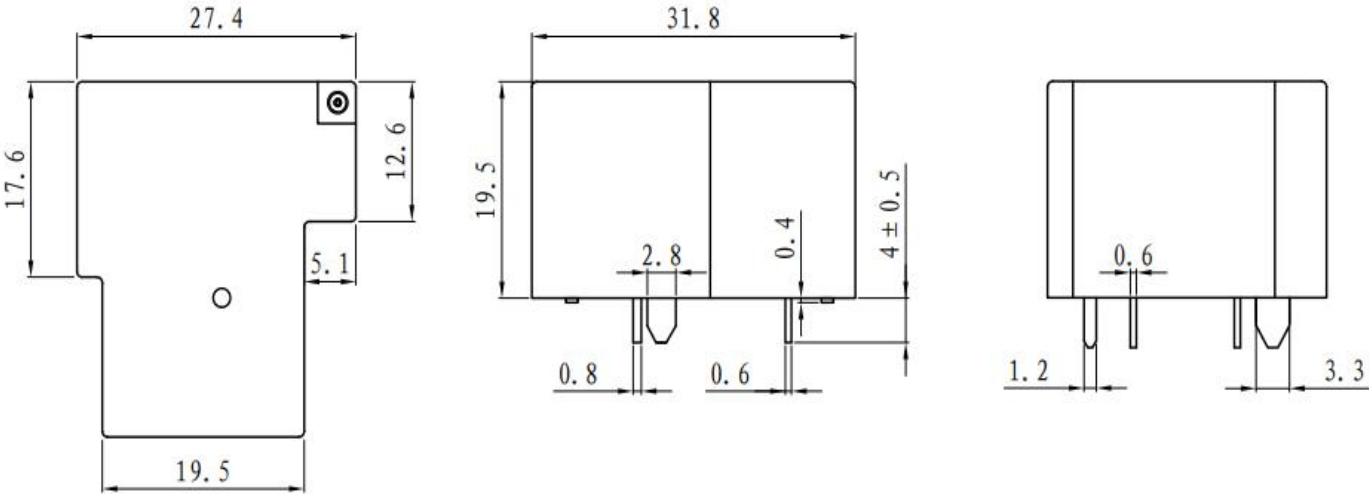

安装孔位图(底视图)
PCB Layout (Bottom view)

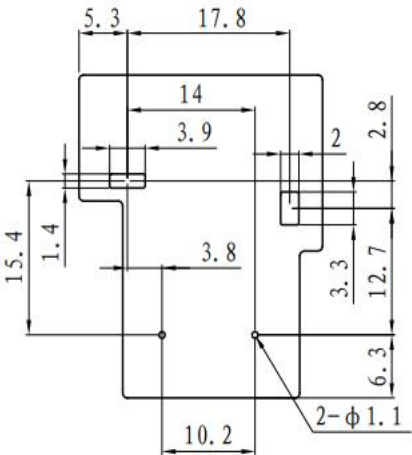

接线图(底视图)
Wiring Diagram
(Bottom view)

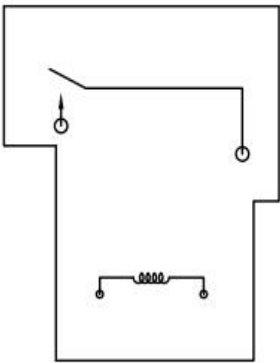

备注:

1. 产品外形图的引脚标注尺寸为沾锡前尺寸（沾锡后会变大），安装孔尺寸为推荐的PCB板孔的设计尺寸，具体PCB板孔设计尺寸可根据产品实物进行测绘、调整。
2. 产品部分外形尺寸未注尺寸公差，当外形尺寸 $\leq 1\text{mm}$ ，公差为 $\pm 0.2\text{mm}$ ；当外形尺寸在 $(1\sim 5)\text{mm}$ 之间时，公差为 $\pm 0.3\text{mm}$ ；当外形尺寸 $> 5\text{mm}$ ，公差为 $\pm 0.4\text{mm}$
3. 安装孔尺寸中未注尺寸公差为 $\pm 0.1\text{mm}$

DISCLAIMER:

1. The pin dimension in the outline drawing or the product is the dimension before dipping tin (It gets bigger when stained with tin). The size of mounting hole is the recommended design size of PCB hole. The specific PCB hole design size can be mapped and adjusted according to the actual product.
2. The overall dimension of the product if not marked with dimensional tolerance, when the overall dimension $\leq 1\text{mm}$, Tolerance is $\pm 0.2\text{mm}$. When the overall dimension is $(1\sim 5)\text{mm}$, Tolerance is $\pm 0.3\text{mm}$. When the overall dimension $> 5\text{mm}$, Tolerance is $\pm 0.4\text{mm}$.
3. The dimension tolerance of mounting hole without dimension injection is $\pm 0.1\text{mm}$.

备注:

具体参数型号和产品性能以我司承认书为准，本产品规格书仅作参考，若有更改，恕不另行通知。

对科信而言，不可能评定继电器在每个具体应用领域的所有性能参数要求，因而客户应该根据具体的使用条件，选择与之相匹配的产品。若有疑问，请与科信联系 以便获取更多的技术支持。但产品选型责任仅由客户负责。

DISCLAIMER:

The specific parameters, models, and product performance shall be subject to our company's acceptance letter. This product specification sheet is for reference only and is subject to change without prior notice.

For AFE, it is not possible to assess all performance requirements for relays in each specific application area and therefore the customer should select a suitable product for each specific application, please contact AFE for additional technical support. But the responsibility of product selection is only the responsibility of the customer.