

JINDU MACHINE



Your Customized Industrial Kitchen Equipment Manufacturer



Index

产品目录

p 公司简介 /ABOUT US	01
p 燃气灶系列 /GAS STOVE SERIES	05
p 排烟罩系列 /FUME EXHAUST HOOD SERIES	15
p 调理类系列 /PREPARATION EQUIPMENT SERIES	17
p 电磁灶系列 /INDUCTION COOKER SERIES	30
p 万能蒸烤箱 /UNIVERSAL STEAM OVEN SERIES	55
p 洗碗机系列 /DISHWASHER SERIES	61
p 厨余垃圾处理系统 /KITCHEN WASTE DISPOSAL SYSTEM	65
p 冰箱类系列 /REFRIGERATOR SERIES	66
p 新品系列 /NEW PRODUCT SERIES	67



WUXI JINDU MACHINE CO., LTD. 无锡金都机械装备有限公司

Wuxi Jindu Machine Co., Ltd. is headquartered in Wuxi City of Jiangsu Province in the People's Republic of China. Founded in 1991, We are a leading kitchen equipment manufacturer that could fulfil our customer's most demanding requirements with innovative designs, robust R&D and testing, advanced manufacturing capabilities, sincere sales offers and intimate aftersales services. Our kitchen designs, product solutions and reliable equipment are hugely popular and successful in many countries in Europe, North America, Asia Pacific, Middle East and Africa.

Wuxi Jindu Machine Co., Ltd. has a 100,000 m² production plant specialised in the manufacturing of various kitchen equipment including cooking stoves, gas burner systems, steam generation systems, exhaust hood & ventilation systems, tableware and a wide range of stainless steel durable thick bottomed pots and containers.

We are tireless in our continuous development and application of new technologies to produce more advanced processing equipment, reinforce most stringent product quality control and adhere to our quality commitments and customer services. We have won the trust of customers at home and abroad. We take honesty and integrity as our business philosophy, strive to meet the needs of customers from different countries and jointly explore the journey of growth.

无锡金都机械装备有限公司位于中国江苏太湖之滨，成立于1991年，是集研发、生产、销售于一体的炊事装备制造企业，产品畅销欧美、东南亚、中东、非洲等国家和地区。我们拥有十万平米生产厂房，专业生产各类炊事机械和配套不锈钢制品。主要包括：商用炉具、燃烧系统、蒸汽发生系统、排烟通风系统、调理设备以及各种不锈钢耐用厚底锅类容器。

多年来，我们致力于研发新技术，加强品质管理，依靠定制开发的优势、以及完善的售后服务赢得了客户的认可信赖。

我们将以诚信务实为经营宗旨，努力满足不同国家和地区客户的需求，共同开拓发展之路。



ADD: No. 8, Xuedian South Road, Shuofang Town, Xinwu District, Wuxi City 江苏省无锡市新吴区硕放薛典南路8号



JINDU F&B EQUIPMENT (SINGAPORE) PTE. LTD.
金都餐饮装备(新加坡)有限公司

Jindu F&B Equipment (Singapore) Pte. Ltd. is an international sales office in Singapore established by Wuxi Jindu Machine Co., Ltd. With Singapore's conducive business environment, tax advantages, and extensive global trade connectivity, Jindu F&B Equipment (Singapore) Pte. Ltd will not only catalyse the steady development of our enterprise, but it will also support our global customers with customisable high-quality products and for us to make your thoughts come true.

金都餐饮装备（新加坡）有限公司，是无锡金都机械装备有限公司在新加坡开设的销售公司。利用新加坡的商业便利性、税收优惠和金融中心地位，我们在保持企业稳健发展的同时，希望为全球客户提供个性化的高品质产品。

让我们协助您，将构想变为现实。




WeChat



WhatsApp



ADD Book

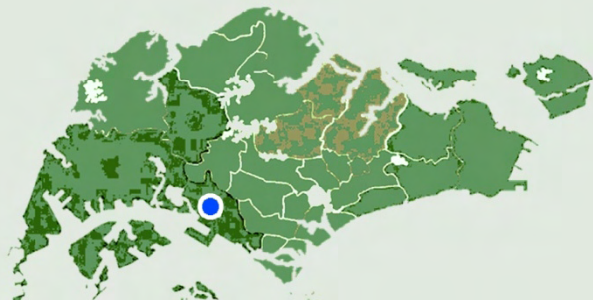

Add: 8 Boon Lay Way, #10-06, Tradehub 21 Singapore 609964

Values Spiritual Mission



价值观：诚信、服务、优化、分享
Values: Integrity, service, optimization, sharing




企业精神：团结、严谨、合作、坚持
Spiritual: Unity, rigor, cooperation, perseverance



企业使命：提升餐饮生产效率，降低人力服务成本
Mission: Improve catering production efficiency and reduce labor service costs

Enterprise Advantages

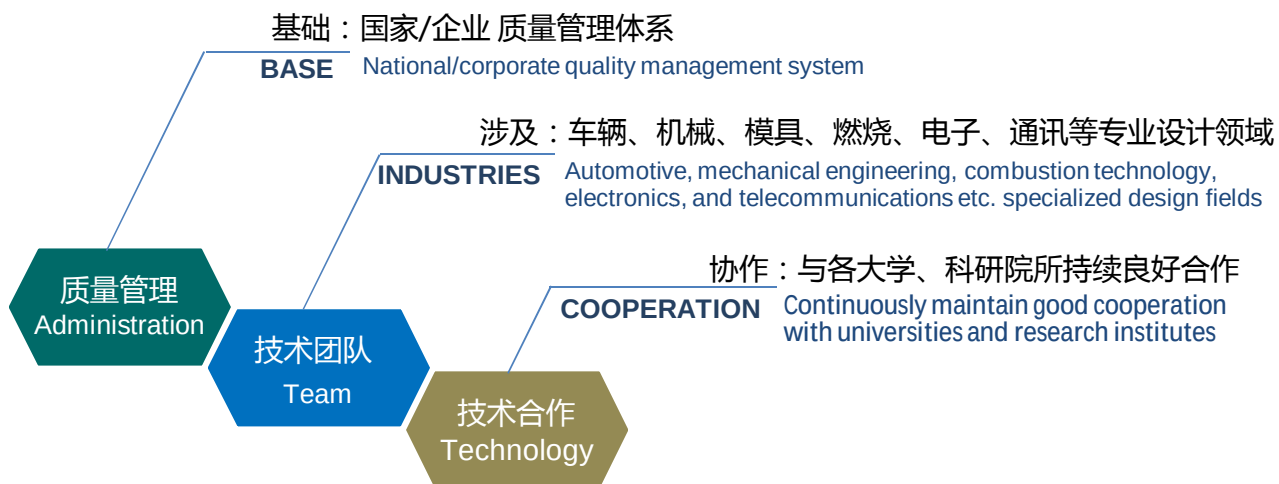

中式岛型组合一体炉

- Ø 提高空间利用率、操作人员的工作效率。
- Ø 烹饪功能百变组合，实现菜肴的多样化做法。
- Ø 整体台面，圆形导角，卫生无死角。

Chinese Island Type Combined Integrated Furnace

- Ø Enhance space utilization and improve the work efficiency of the operator.
- Ø Versatile cooking functions allow for a diverse range of culinary techniques.
- Ø The entire countertop is seamless with rounded corners for easy cleaning and no sanitation blind spots.



中式组合一体炉

- Ø 提高空间利用率、操作人员的工作效率。
- Ø 烹饪功能百变组合，实现菜肴的多样化做法。
- Ø 整体台面，圆形导角，卫生无死角。

Chinese Combined Integrated Furnace

- Ø Enhance space utilization and improve the work efficiency of the operator.
- Ø Versatile cooking functions allow for a diverse range of culinary techniques.
- Ø The entire countertop is seamless with rounded corners for easy cleaning and no sanitation blind spots.




上海式燃气环保双头单尾双文火炒炉

- Ø 炉面：SUS 304不锈钢
- Ø 炮台：一次拉伸成型，便于清洁
- Ø 炉头：环保预混炉头，噪音 < 70dB
- Ø 炉膛：高AL203耐火砖，整体炉膛内径φ345mm
- Ø 风机：低噪音强力风机 250W×2
- Ø 点火：一键式按钮电子点火+熄火保护

Shanghai Style Gas Environmental Protection Dual-Head Single-tail Double Slow Frying Stove

- Ø Stove Surface: Stainless steel 304
- Ø Wok Stand: Formed in one piece for easy cleaning
- Ø Burner: Environmental pre-mixed burner, noise level < 70dB
- Ø Furnace Chamber: High-quality AL203 refractory bricks overall furnace chamber inner diameter φ345mm
- Ø Fan: Low noise, powerful fan 250W × 2
- Ø Ignition: One button elec. ignition with flame failure protection

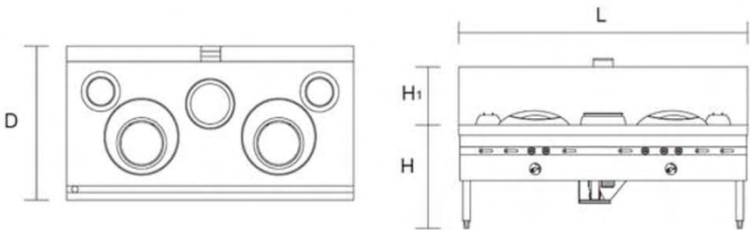


型号/Model	长/Length (mm)	深/Depth (mm)	高/Height (mm)	热负荷/Burner Rating (kW)	电压 (Voltage)
ZCTG2-S	2300	1200	800+450	(42+5) × 2	220

广式燃气环保双头双尾炒炉


- Ø 炉面：SUS 304不锈钢
- Ø 炮台：一次拉伸成型，便于清洁
- Ø 炉头：环保预混炉头，噪音 < 70dB
- Ø 炉膛：高AL203耐火砖，整体炉膛内径φ345mm
- Ø 风机：低噪音强力风机 250W×2
- Ø 点火：一键式按钮电子点火+熄火保护

Cantonese Style Gas Environmental Protection Dual-head Dual-tail Frying Stove

- Ø Stove Surface: Stainless steel 304
- Ø Wok Stand: Formed in one piece for easy cleaning
- Ø Burner: Environmental pre-mixed burner, noise level < 70dB
- Ø Furnace Chamber: High-quality AL203 refractory bricks overall furnace chamber inner diameter φ345mm
- Ø Fan: Low noise, powerful fan 250W × 2
- Ø Ignition: One button elec. ignition with flame failure protection

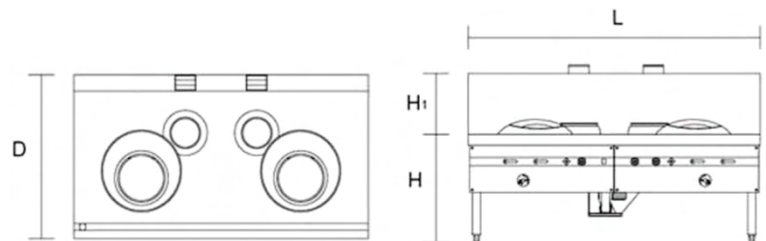

型号/Model	长/Length (mm)	深/Depth (mm)	高/Height (mm)	热负荷/Burner Rating (kW)	电压 (Voltage)
ZCTG2-G	2200	1200	800+450	42×2	220

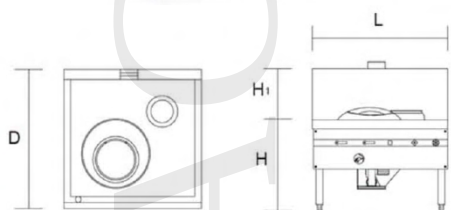


广式燃气环保单头单尾炒炉

- Ø 炉面：SUS 304不锈钢
- Ø 炮台：一次拉伸成型，便于清洁
- Ø 炉头：环保预混炉头，噪音 < 70dB
- Ø 炉膛：高AL203耐火砖，整体炉膛内径 ϕ 345mm
- Ø 风机：低噪音强力风机 250W
- Ø 点火：一键式按钮电子点火+熄火保护

Cantonese Gas Environmental Protection
Single-head Single-tail Frying Stove

- Ø Stove Surface: Stainless steel 304
- Ø Wok Stand: Formed in one piece for easy cleaning
- Ø Burner: Environmental pre-mixed burner, noise level < 70dB
- Ø Furnace Chamber: High-quality AL203 refractory bricks overall furnace chamber inner diameter ϕ 345mm
- Ø Fan: Low noise, powerful fan 250W
- Ø Ignition: One button elec. ignition with flame failure protection

型号/Model	长/Length (mm)	深/Depth (mm)	高/Height (mm)	热负荷/Burner Rating (kW)	电压 (Voltage)
	1200	1200	800+450	42	220

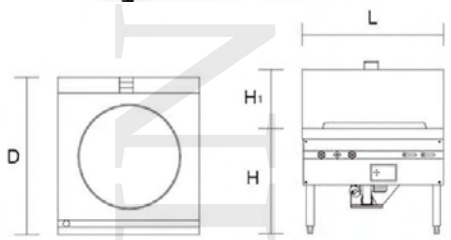


广式燃气环保单头单尾炒炉

- Ø 炉面：SUS 304不锈钢
- Ø 炮台：一次拉伸成型，便于清洁
- Ø 炉头：环保预混炉头，噪音 < 70dB
- Ø 炉膛：高AL203耐火砖，整体炉膛内径 ϕ 345mm
- Ø 风机：低噪音强力风机 250W
- Ø 点火：一键式按钮电子点火+熄火保护

Cantonese Gas Environmental Protection
Single-head Single-tail Frying Stove

- Ø Stove Surface: Stainless steel 304
- Ø Wok Stand: Formed in one piece for easy cleaning
- Ø Burner: Environmental pre-mixed burner, noise level < 70dB
- Ø Furnace Chamber: High-quality AL203 refractory bricks overall furnace chamber inner diameter ϕ 345mm
- Ø Fan: Low noise, powerful fan 250W
- Ø Ignition: One button elec. ignition with flame failure protection

型号/Model	长/Length (mm)	深/Depth (mm)	高/Height (mm)	热负荷/Burner Rating (kW)	电压 (Voltage)
	1200	1200	800+450	42	220

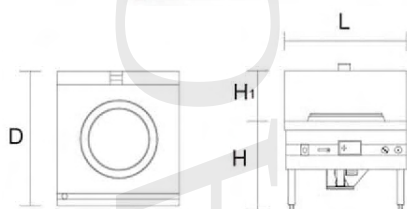


燃气环保单头蒸炉

- Ø 炉面：SUS 304不锈钢
- Ø 炮台：直身炉围方便清洁
- Ø 炉头：自引风大火环保炉头
- Ø 水胆：不锈钢火管热交换结构
- Ø 点火：一键式按钮电子点火+熄火保护

Gas Environmental Protection
Single-Head Steaming Stove

- Ø Stove Surface: Stainless steel 304
- Ø Wok Stand: Straight design for easy cleaning
- Ø Burner: Self-induced draft high-fire eco-burner
- Ø Water Tank: Stainless steel fire tube heat exchange structure
- Ø Ignition: One button elec. ignition with flame failure protection

型号/Model	长/Length (mm)	深/Depth (mm)	高/Height (mm)	热负荷/Burner Rating (kW)	电压 (Voltage)
	1200	1200	800+450	42	220

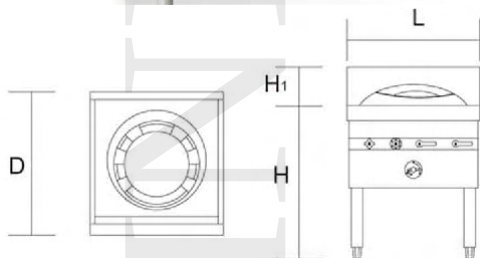


燃气环保单头什碎炉

- Ø 炉面：SUS 304不锈钢
- Ø 炮台：一次拉伸成型，便于清洁
- Ø 炉头：环保预混炉头，噪音 < 70dB
- Ø 炉膛：高AL203耐火砖，整体炉膛内径φ315mm
- Ø 风机：低噪音强力风机 180W
- Ø 点火：一键式按钮电子点火+熄火保护

Gas Environmental Protection
Single-Head Chop Furnace

- Ø Stove Surface: Stainless steel 304
- Ø Wok Stand: Formed in one piece for easy cleaning
- Ø Burner: Environmental pre-mixed burner, noise level < 70dB
- Ø Furnace Chamber: High-quality AL203 refractory bricks overall furnace chamber inner diameter φ315mm
- Ø Fan: Low noise, powerful fan 180W
- Ø Ignition: One button elec. ignition with flame failure protection

型号/Model	长/Length (mm)	深/Depth (mm)	高/Height (mm)	热负荷/Burner Rating (kW)	电压 (Voltage)
	760	900	800+450	32	220

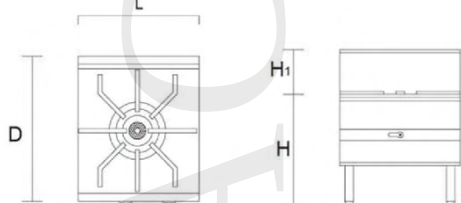


燃气单头矮汤炉

- Ø 炉体：SUS 304不锈钢
- Ø 炉板：精铸炉花板
- Ø 炉头：14" 强力炉头
- Ø 火种：常明火
- Ø 点火：一键式按钮电子点火+熄火保护
- Ø 油盘：下置活动盛油盘，方便清洁

Gas Single-Head Stock Pot Stove

- Ø Stove Body: Stainless steel 304
- Ø Panel: Precision cast stove panel
- Ø Burner: 14-inch high-power burner
- Ø Pilot Light: Permanently lit
- Ø Ignition: One button elec. ignition with flame failure protection
- Ø Oil Pan: Detachable oil tray located underneath for easy cleaning

型号/Model	长/Length (mm)	深/Depth (mm)	高/Height (mm)	热负荷/Burner Rating (kW)	电压 (Voltage)
	500	700	500+300	14	/

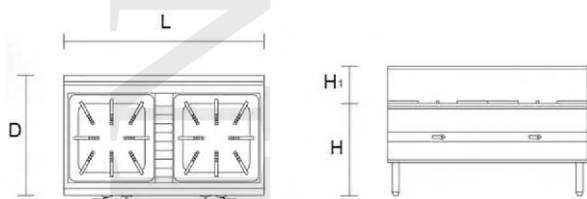


燃气双头矮汤炉

- Ø 炉体：SUS 304不锈钢
- Ø 炉板：精铸炉花板
- Ø 炉头：14" 强力炉头
- Ø 火种：常明火
- Ø 点火：一键式按钮电子点火+熄火保护
- Ø 油盘：下置活动盛油盘，方便清洁

Gas Double-Head Stock Pot Stove

- Ø Stove Body: Stainless steel 304
- Ø Panel: Precision cast stove panel
- Ø Burner: 14-inch high-power burner
- Ø Pilot Light: Permanently lit
- Ø Ignition: One button elec. ignition with flame failure protection
- Ø Oil Pan: Detachable oil tray located underneath for easy cleaning

型号/Model	长/Length (mm)	深/Depth (mm)	高/Height (mm)	热负荷/Burner Rating (kW)	电压 (Voltage)
	1100	700	500+300	14×2	/

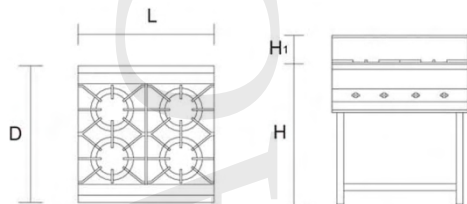


燃气四头平头炉

- Ø 炉体：SUS 304不锈钢
- Ø 炉板：精铸炉花板
- Ø 炉头：4"×2, 7"×2强力炉头
- Ø 火种：常明火
- Ø 点火：一键式按钮电子点火+熄火保护
- Ø 油盘：下置活动盛油盘，方便清洁

Gas Four-Head Open Flame Range

- Ø Stove Body: Stainless steel 304
- Ø Panel: Precision cast stove panel
- Ø Burner: 4-inch×2and 7-inch×2 high-power burners
- Ø Pilot Light: Permanently lit
- Ø Ignition: One button elec. ignition with flame failure protection
- Ø Oil Pan: Detachable oil tray located underneath for easy cleaning

型号/Model	长/Length (mm)	深/Depth (mm)	高/Height (mm)	热负荷/Burner Rating (kW)	电压 (Voltage)
	720	860	800+150	5×2+7×2	/

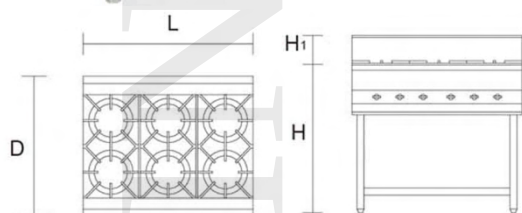

燃气六头平头炉

- Ø 炉体：SUS 304不锈钢
- Ø 炉板：精铸炉花板
- Ø 炉头：4"×3, 7"×3强力炉头
- Ø 火种：常明火
- Ø 点火：一键式按钮电子点火+熄火保护
- Ø 油盘：下置活动盛油盘，方便清洁

Gas Six-Head Open Flame Range


- Ø Stove Body: Stainless steel 304
- Ø Panel: Precision cast stove panel
- Ø Burner: 4-inch×3and 7-inch×3 high-power burners
- Ø Pilot Light: Permanently lit
- Ø Ignition: One button elec. ignition with flame failure protection
- Ø Oil Pan: Detachable oil tray located underneath for easy cleaning

型号/Model	长/Length (mm)	深/Depth (mm)	高/Height (mm)	热负荷/Burner Rating (kW)	电压 (Voltage)
	1050	860	800+150	5×3+7×3	/



燃气环保三门蒸柜

Gas Environmental Protection Three-Door Steaming Cabinet




型号/Model	长/Length	深/Depth	高/Height	热负荷/Burner Rating (kW)	电压 (Voltage)
ZXTF-36	900	850	1920	36	220



燃气环保单门蒸柜

Gas Environmental Protection Single-Door Steaming Cabinet




型号/Model	长/Length	深/Depth	高/Height	热负荷/Burner Rating (kW)	电压 (Voltage)
ZXTF-38B	800	850	1850	38	220



燃气环保双门蒸柜


Gas Environmental Protection Double-Door Steaming Cabinet

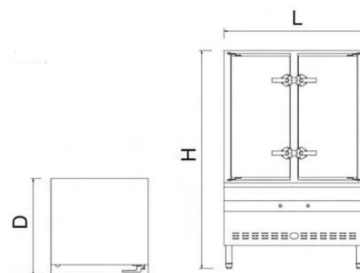


型号/Model	长/Length	深/Depth	高/Height	热负荷/Burner Rating (kW)	电压 (Voltage)
ZXTF-45C	1150	850	1850	45	220



燃气烤鸭炉 / Gas Duck Roaster

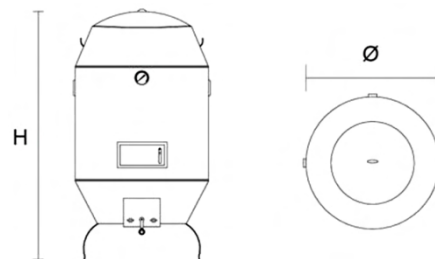


型号/Model	直径/Diameter	高/Height	热负荷/Burner Rating (kW)	电压/Voltage
RQKYL800	φ 800	1500	14	/

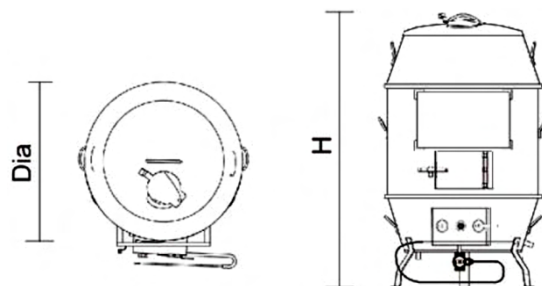燃气热反射式烤鸭炉
Gas Heat Radiant Type Duck Roaster

型号/Model	长/Length	高/Height	热负荷/Burner Rating (kW)	电压/Voltage
RQKYL965	φ 965	1500	16	/



燃气烤鸭炉 / Gas Roasting Pig Stove

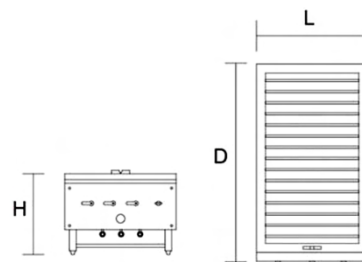

型号/Model	长/Length	深/Depth	高/Height	热负荷/Burner Rating (kW)	电压/Voltage
RQKZL62	620	1120	600	50	/



集成天花排烟系统

- Ø 提供最佳的捕捉和吸纳效率，废气物浓度最多可降低70%；
- Ø 使用多级旋风导油网，高效去除油污；
- Ø 采用置换通风方式和可调式灯具，风量需求低且节省更多的能源；
- Ø 保护房屋结构免受油污、湿气、杂质的火灾的危害；
- Ø 具有从油污吸排、新风补给到厨房照明的所有优势功能。

Integrated ceiling Fume Exhaust System

- Ø Provides the best capture and absorption efficiency. The concentration of waste gases can be reduced by up to 70%.
- Ø Uses a multi-stage cyclone oil guide net for efficient removal of grease.
- Ø Low air volume requirements, employing displacement ventilation methods and adjustable lighting fixtures to save more energy.
- Ø Protects the building structure from the hazards of fire caused by grease, moisture, and impurities.
- Ø Possess all the advantages from oil pollution suction and drainage, fresh air supply to kitchen lighting.

运水烟罩 Water Cycle Fume Exhaust Hood



- Ø 全自动控制
- Ø 有效降低空气污染
- Ø 具备防火功能
- Ø 更经济更有效
- Ø 英联邦专利注册
- Ø Fully automatically control
- Ø Pollution control problem solved
- Ø Fire prevention
- Ø More efficient and economic
- Ø Patent Registration of Commonwealth


隔烟及除味率 /Percentage of Fume and odor removed55%

隔油率 /Percentage of grease removed93%


UV光解烟罩 UV Photolysis Fume Exhaust Hood



- Ø 利用特殊的C波段紫外线(185nm)照射油烟，激发其活性，改变分子结构，并与氧气反应，形成水、二氧化碳和微量低分子化合物粉末。
- Ø 利用紫外线及臭氧对油烟及气味光解氧化，臭氧将小油脂分子分解成棕榈酸、水等。
- Ø Using special C-band ultraviolet radiation (185nm) to irradiate oil fumes, stimulate their activity, change their molecular structure, and react with oxygen to form water, carbon dioxide, and trace amounts of low molecular compound powder.
- Ø Using ultraviolet radiation and ozone to photo degrade and oxidize oil fumes and odors, ozone decomposes small oil molecules into palmitic acid, water, etc.

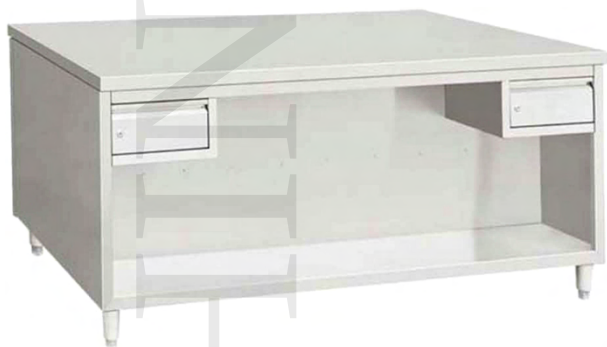


打荷台柜 / Load Cabinet

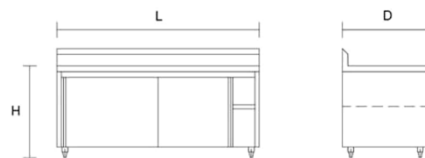

型号/Model	长/Length	深/Depth	高/Height
DHT 1890	1800	900	850
DHT 2010	2000	1000	850




前开口后移门打荷台
Front Open Rear Swing Door Load Station

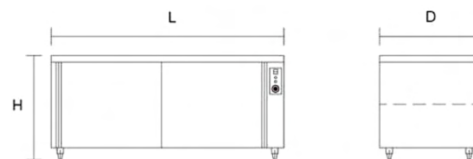

型号/Model	长/Length	深/Depth	高/Height
DHTB 1576	1500	760	850+150
DHTB 1876	1800	760	850+150



前开口后移门打荷台
Front Open Rear Swing Door Load Station

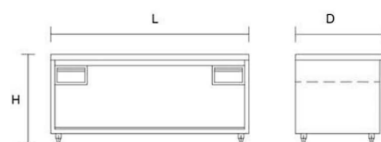


型号/Model	长/Length	深/Depth	高/Height
DHT1890	1800	900	850
DHT2010	2000	1000	850



万能蒸烤箱底柜

Universal Steam Oven Bottom Cabinet

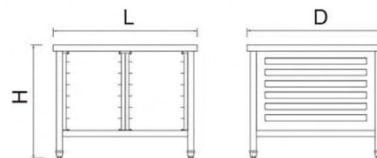


型号/Model	长/Length	深/Depth	高/Height
KXG1080	1000	800	800
KXG1090	1000	900	800



星盆柜带滴水槽


Star Basin Cabinet with Drip Tray

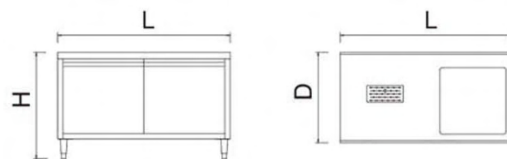


型号/Model	长/Length	深/Depth	高/Height
XPG1080	1200	760	850
XPG1090	1500	760	850




GN盆工作柜 /GN Basin Work Cabinet

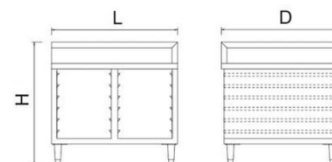

型号/Model	长/Length	深/Depth	高/Height
GNG1276	1200	760	850+150
GNG1576	1500	760	850+150

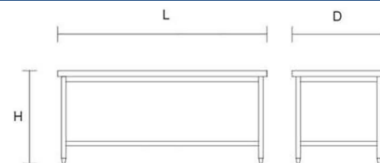工作台连下一层板
Double-layer Work Table


型号/Model	长/Length	深/Depth	高/Height
GZT1276C1	1200	760	850
GZT1576C1	1500	760	850
GZT1876C1	1800	760	850

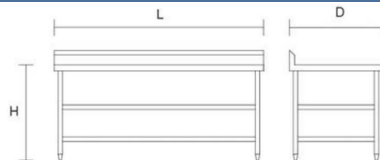工作台连下二层板
Three Work Table

型号/Model	长/Length	深/Depth	高/Height
GZT1276C2	1200	760	850+150
GZT1576C2	1500	760	850+150
GZT1876C2	1800	760	850+150

工作台连下一层板
Double Work Table (with left and right back)

型号/Model	长/Length	深/Depth	高/Height
GZT1276C3	1200	760	850+150
GZT1576C3	1500	760	850+150
GZT1876C3	1800	760	850+150

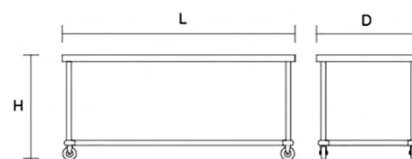
活动工作台连下一层
Movable Double-layer Work Table

型号/Model	长/Length	深/Depth	高/Height
HDGZT1276C1	1200	760	850
HDGZT1576C1	1500	760	850
HDGZT1876C1	1800	760	850



可调挂墙单层板

Adjustable Wall-Mounted Single Panel

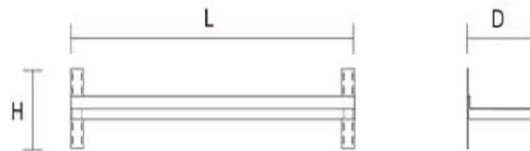


型号/Model	长/Length	深/Depth	高/Height
GQB1235D1	1200	350	350
GQB1535D1	1500	350	350
GQB1835D1	1800	350	350



可调挂墙双层板


Adjustable Wall-Mounted Double Panel

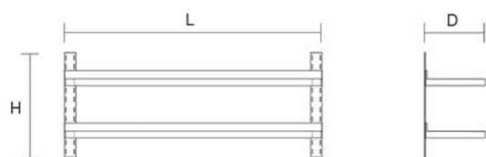

型号/Model	长/Length	深/Depth	高/Height
GQB1235D2	1200	350	700
GQB1535D2	1500	350	700
GQB1835D2	1800	350	700




挂墙柜 /Wall-Mounted Cabinet

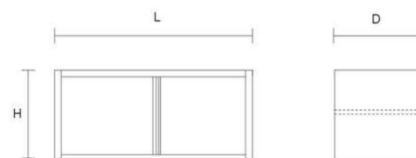

型号/Model	长/Length	深/Depth	高/Height
GQG1235	1200	350	600
GQG1535	1500	350	600
GQG1835	1800	350	600




高身储物柜 / High Body Lockers



型号/Model	长/Length	深/Depth	高/Height
CWG1250M1	1200	500	1800
CWG1550M1	1500	500	1800




双门储物柜 / Double-Door Lockers

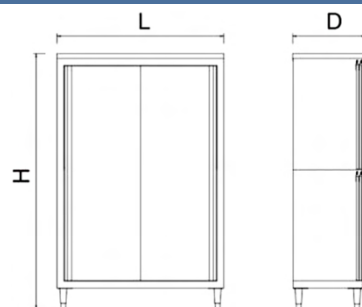

型号/Model	长/Length	深/Depth	高/Height
CWG1250M2	1200	500	1800
CWG1550M2	1500	500	1800



巧克力柜 / Chocolate Cabinet




型号/Model	长/Length	深/Depth	高/Height
QKLG5065	500	650	1800



拆装式四层货架

Assembled Four-Layer Shelf




型号/Model	长/Length	深/Depth	高/Height
PHJ1250C1	1200	500	1800
PHJ1550C1	1500	500	1800
PHJ1850C1	1800	500	1800



四层平板货架

Four-Layer Flat Shelf




型号/Model	长/Length	深/Depth	高/Height
HJ1250C1P	1200	500	1800
HJ1550C1P	1500	500	1800
HJ1850C1P	1800	500	1800



四层平板冲孔货架


Four-Layer Flat Punching Rack



型号/Model	长/Length	深/Depth	高/Height
HJ1250C1C	1200	500	1800
HJ1550C1C	1500	500	1800
HJ1850C1C	1800	500	1800




单星盆台 /Single Star Basin




型号/Model	长/Length	深/Depth	高/Height
XSC7070C1	700	700	800+150
XSC7076C1	700	760	800+150
XSC1076C1	1000	760	800+150




单星盆台 /Single Star Basin



型号/Model	长/Length	深/Depth	高/Height
XPT1276C1	1200	760	800+150
XPT1576C1	1500	760	800+150
XPT1876C1	1800	760	800+150

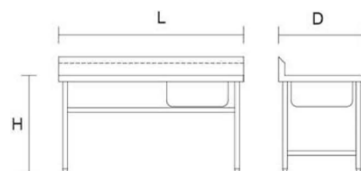单星盆台 (带拐角背)
Single Star Basin (with Comer Back)


型号/Model	长/Length	深/Depth	高/Height
XPT1276C1G	1200	760	800+150
XPT1576C1G	1500	760	800+150
XPT1876C1G	1800	760	800+150

单星盆台 (带下一层板)
Single Star Basin (with Lower Shelf)

型号/Model	长/Length	深/Depth	高/Height
XPT1276C1C	1200	760	800+150
XPT1576C1C	1500	760	800+150
XPT1876C1C	1800	760	800+150




长星盆理鱼台 /Fish Processing Platform

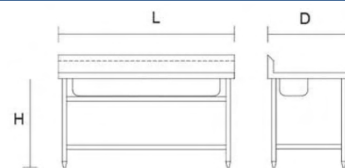


型号/Model	长/Length	深/Depth	高/Height
LYT1276	1200	760	850+150
LYT1576	1500	760	850+150



蔬菜加工台 /Vegetable Processing Platform

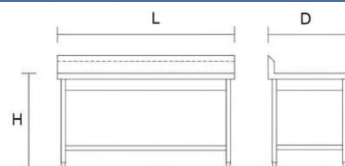


型号/Model	长/Length	深/Depth	高/Height
SCT1276	1200	760	850+150
SCT1576	1500	760	850+150

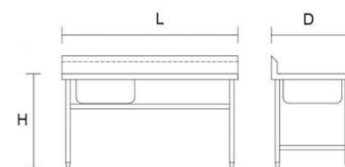单星盆理鱼台
Single Star Basin Fish Processing Platform

型号/Model	长/Length	深/Depth	高/Height
LYT1576A	1500	760	850+150
LYT1876A	1800	760	850+150




三星洗锅池 /Three Stars Pot Wash Pool

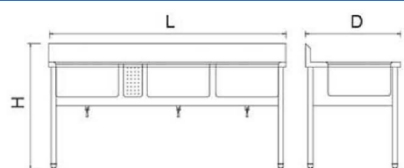


型号/Model	长/Length	深/Depth	高/Height
XGC2280	2200	800	850+150
XGC2380	2300	800	850+150




L型双星污碟台
L-Shaped Double Star Dirty Dish Table

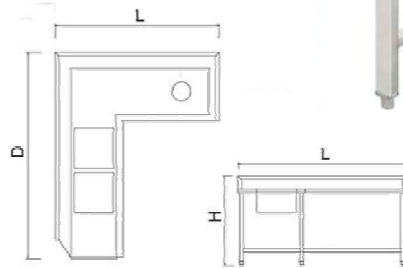

90度转角器
90 Degree Angling Equipment

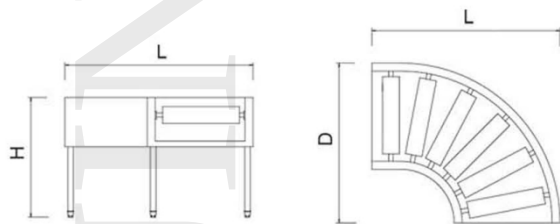


滚轴工作台
Rolling Work Table

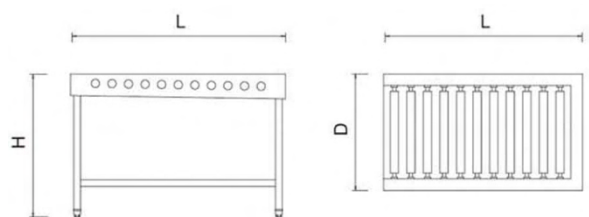




高低拖把池 / High And Low Mop Pool

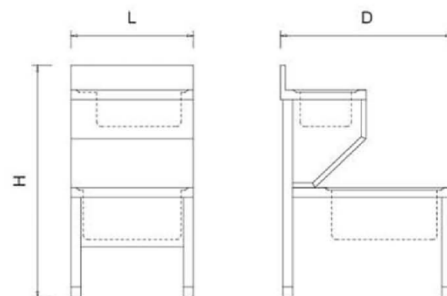

型号/Model	长/Length	深/Depth	高/Height
TBC5070	500	700	800+150




高低拖把池 / High And Low Mop Pool

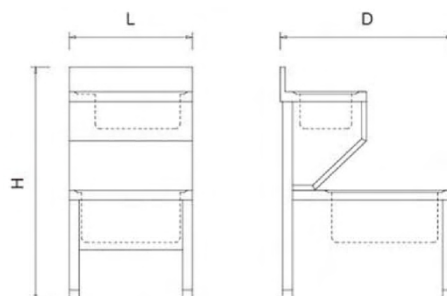


型号/Model	长/Length	深/Depth	高/Height
TBC5070A	500	700	800+150




高低拖把池 / High And Low Mop Pool

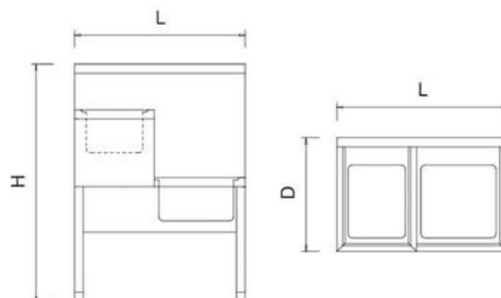

型号/Model	长/Length	深/Depth	高/Height
TBC8045	800	450	850+200

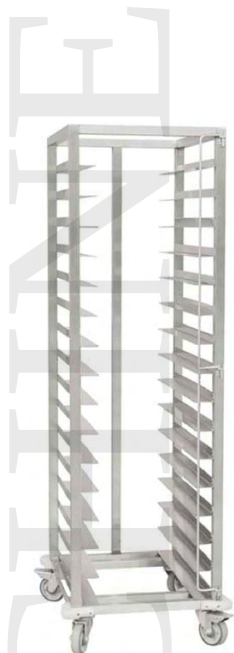


高身饼盘车 /High Body Cake Turntable



型号/Model	长/Length	深/Depth	高/Height
KPC4665	460	650	1700




高身GN车 /High Body GN Cart



型号/Model	长/Length	深/Depth	高/Height
GNC5970	590	700	1700



吹腊柜 / Blowing Cabinet

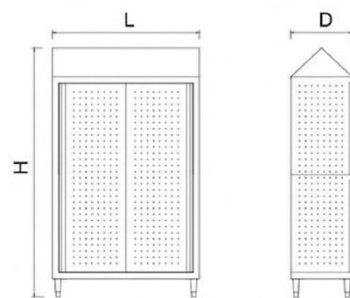

型号/Model	长/Length	深/Depth	高/Height
CLG1460	1400	600	1800


挂墙膝推式洗手星

Wall Hanging Knee Push Type Hand Washing Basin



挂墙洗手星

Wall Hanging Hand Washing Basin

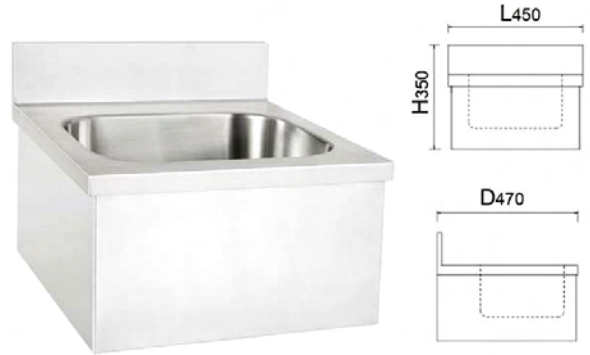


挂墙膝推式洗手星

Wall Hanging Knee Push Type Hand Washing Basin



挂墙双洗手星

Wall Hanging Dual Hand Washing Basin

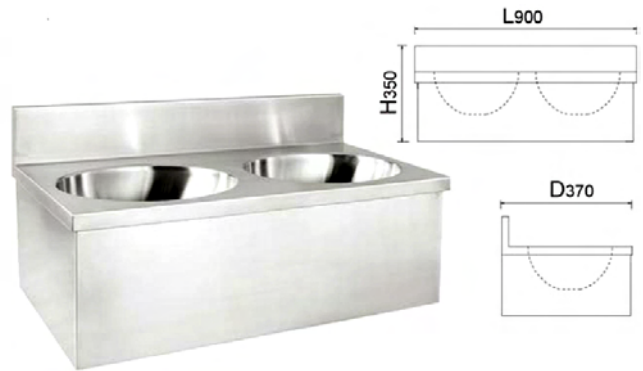

膝推式洗手星连垃圾桶柜

Knee Push Type Hand Washing Basin Even Garbage Bin





洗手星盆连垃圾桶柜

Hand Washing Basin Even Garbage Bin




隔气地沟(地漏)连盖板 / Block off Odor Trench (Floor Drain) with Cover Plate

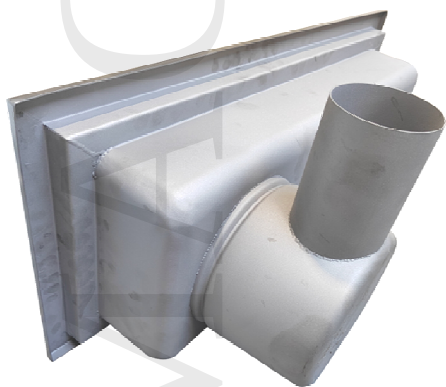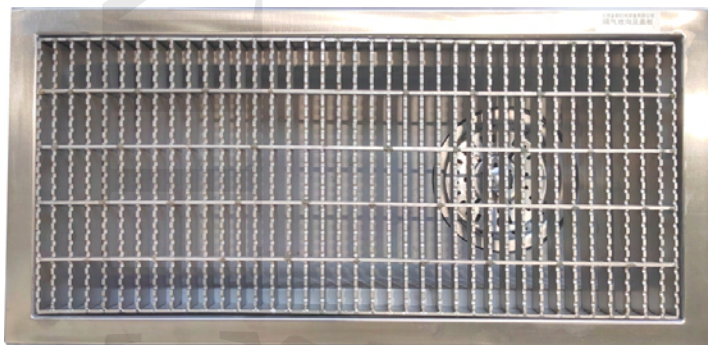

- Ø SUS 304 不锈钢材料
- Ø SUS 304 隔渣篮, 防酸碱腐蚀
- Ø 过渡层 密封圈, 阻隔串味
- Ø 地沟倾斜坡度, 泄水通畅
- Ø 长度定制, 现场组装

- Ø SUS 304 stainless steel material
- Ø SUS 304 slag blocking basket, anti acid and alkali corrosion
- Ø Transition layer sealing ring, blocking odor interference
- Ø The inclined slope of the trench ensures smooth drainage
- Ø Customized length and on-site assembly

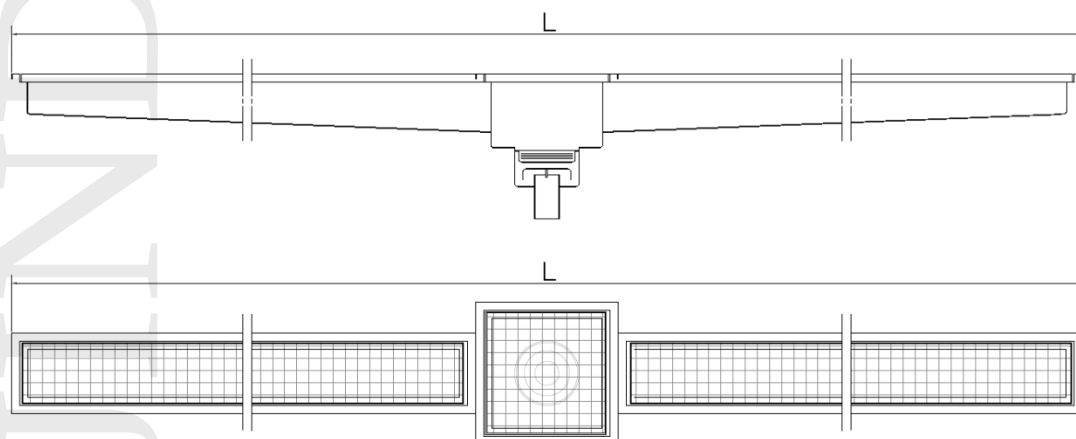



菜谱驱动！
 还原大厨技艺和风味



Recipe Driven !
 Replicating the
 Skills and Flavors
 of Master Chefs.



智能滚筒炒菜机 (主要参数)

(Parameters)

功率 Power	电压 Voltage	频率 Frequency	尺寸 Dimensions	炒菜量 Frying Capacity	锅径 Pot Diameter
20kW	380V	50-60Hz	1100×1200×(1250+400)	5-20kg	Φ600×600mm




- Ø 球釜型锅体
- Ø 智能触摸屏
- Ø 智能菜单编辑
- Ø 远程数据分析
- Ø 手机APP管理
- Ø Spherical Pot
- Ø Intelligent Touch Screen
- Ø Intelligent Recipe Editing
- Ø Remote Analysis Management
- Ø Mobile APP Management



智能滚筒炒菜机 (主要参数)
 不带自动调料系统

Intelligent Drum Frying Machine (Parameters)
 Without Automatic Ingredient Dispensing

尺寸 Dimensions	加热功率 Heating Power	电压/频率 Voltage/Frequency	锅径 Pot Diameter	炒菜量 Frying Capacity
1250×1150×1250mm	20kW	380V/50-60Hz	Φ600×600mm	5-20kg

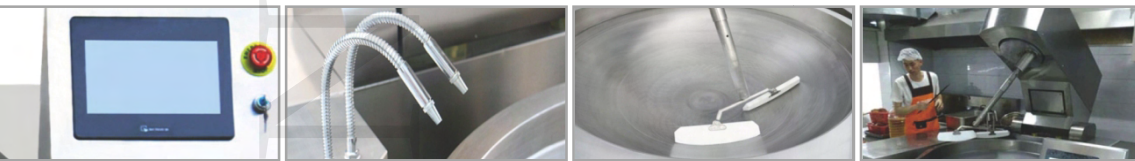

标准化 Standardization
 流程化 Process-oriented
 提高效率 Improve Efficiency
 减轻劳动强度 Reduce Labor Intensity

电磁行星搅拌锅 (主要参数)

Induction Planetary Stirring Frying Machine (Parameters)

尺寸 Dimensions	加热功率 Heating Power	电压/频率 Voltage/Frequency	锅径 Pot Diameter	锅容积 Pot Volume
1830×1600×1750mm	15 kW	380V/50-60Hz	Φ700 mm	39 L
1930×1700×1750mm	20 kW	380V/50-60Hz	Φ800 mm	61 L
2050×1800×1750mm	25 kW	380V/50-60Hz	Φ900 mm	82 L
2100×1850×1800mm	30 kW	380V/50-60Hz	Φ1000 mm	108 L
2200×1900×1800mm	40 kW	380V/50-60Hz	Φ1200 mm	190 L




- Ø 微电脑程序控制
- Ø 手动/自动双模式
- Ø 菜单可编辑储存

- Ø Microcomputer Control
- Ø Manual / Automatic Mode
- Ø Programmable Menu Storage

全自动行星酱料锅 (主要参数)

Induction Automatic Planetary Sauce Cooking Machine (Parameters)

尺寸 Dimensions	加热功率 Heating Power	电压/频率 Voltage/Frequency	锅径/深度 Pot Diameter/height	锅容积 Pot Volume
2130×1750×1090mm	45 kW	380V/50-60Hz	Φ350/1000 mm	400 L
2275×1780×2140mm	50 kW	380V/50-60Hz	Φ430/1200 mm	600 L



全自动滚筒炒货机 (主要参数)

Fully Automatic Drum Roaster (Parameters)

尺寸 Dimensions	加热功率 Heating Power	电压/频率 Voltage/Frequency	锅径/深度 Pot Diameter/height	锅容积 Pot Volume
1400×1100×1500mm	15 kW	380V/50-60Hz	Φ600/600 mm	160 L
1520×1100×1500mm	20 kW	380V/50-60Hz	Φ700/700 mm	260 L



电磁滚筒炒货机 (主要参数)

Induction Drum Roaster (Parameters)

尺寸 Dimensions	加热功率 Heating Power	电压/频率 Voltage/Frequency	锅径/深度 Pot Diameter/height	锅容积 Pot Volume
1400×1100×1500mm	15 kW	380V/50-60Hz	Φ600/600 mm	160 L
1520×1100×1500mm	20 kW	380V/50-60Hz	Φ700/700 mm	260 L



电磁卧式滚筒炒货机 (主要参数)

Induction Horizontal Fully Drum Roaster (Parameters)


尺寸 Dimensions	加热功率 Heating Power	电压/频率 Voltage/Frequency	锅径/深度 Pot Diameter/height	锅容积 Pot Volume
3390×2050×1900mm	50 kW	380V/50-60Hz	Φ2400/1200 mm	2500 L



电磁卧式滚筒炒货机 (主要参数)

Induction Horizontal Fully Drum Roaster (Parameters)


尺寸 Dimensions	加热功率 Heating Power	电压/频率 Voltage/Frequency	锅径/深度 Pot Diameter/height	锅容积 Pot Volume
2050×1700×1900mm	30 kW	380V/50-60Hz	Φ1200/700 mm	450 L



电磁蒸汽发生器 (主要参数)

Induction Steam Generator (Parameters)


尺寸 Dimensions	水箱尺寸 Tank Dimensions	电压/频率 Voltage/Frequency	加热功率 Heating Power	出汽口直径 Exhaust Diameter
1000×700×900mm	840×430×300mm	380V/50-60Hz	30 kW	Φ40 mm

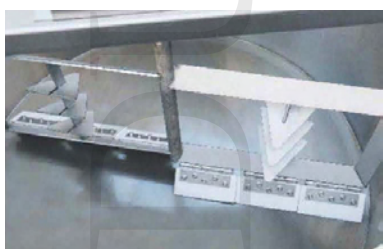

电磁炒花生机 (主要参数)

Induction Peanut Roaster (Parameters)

尺寸 Dimensions	加热功率 Heating Power	电压/频率 Voltage/Frequency	锅径/深度 Pot Diameter/height	锅容积 Pot Volume
1550×1250×1100mm	20 kW	380V/50-60Hz	Φ1000/600 mm	470 L



双缸自动炸炉 (主要参数)

Dual Cylinder Automatic Fryer (Parameters)



尺寸 Dimensions	电压/频率 Voltage/Frequency	加热功率 Heating Power	炸筐 Frying Basket	油缸 Oil Cylinder
1200×900×(800+400)mm	380V/50-60Hz	8 kW×2	240×200×160 mm	350×600×250mm
1200×900×(800+400)mm	380V/50-60Hz	12 kW×2	240×200×160 mm	350×600×250mm



自动搅拌油炸机 (主要参数)

Automatic Stirring Fryer (Parameters)

尺寸 Dimensions	加热功率 Heating Power	电压/频率 Voltage/Frequency	锥形油缸 Conical Oil Cylinder	容量 Capacity
1600×1340×1300mm	45 kW	380V/50-60Hz	Φ1000/Φ850×H270 mm	180 L



电磁自动熬糖机 (主要参数)

Induction Automatic Candy Maker (Parameters)

尺寸 (mm) Dimensions	电压/频率 Voltage/Frequency	加热功率 Heating Power	锅外径 Pot Outside Diameter	容量 Capacity	锅底搅拌刮 Pot Scrape	搅拌调速器 Mixing speed Ctrl.
900×1000×(900+400)	380V/50-60Hz	15 kW	Φ 700mm	150 L	选配件 Optional	选配件 Optional
1000×1100×(900+400)	380V/50-60Hz	20 kW	Φ 800mm	200 L		
1100×1200×(900+400)	380V/50-60Hz	25 kW	Φ 900mm	250 L		
1200×1300×(900+400)	380V/50-60Hz	30 kW	Φ 1000mm	350 L		
1400×1500×(900+400)	380V/50-60Hz	40 kW	Φ 1200mm	600 L		

全自动可倾搅拌锅 (主要参数)

Automatic Titring Stirring Pot (Parameters)

尺寸 (mm) Dimensions	电压/频率 Voltage Frequency	加热功率 Heating Power	锅外径 Pot Outside Diameter	容量 Capacity
1370×1000×1200	380V/50-60Hz	15 kW	Φ 700mm	150 L
1470×1000×1200	380V/50-60Hz	20 kW	Φ 800mm	200 L
1570×1000×1200	380V/50-60Hz	25 kW	Φ 900mm	250 L
1670×1000×1200	380V/50-60Hz	30 kW	Φ 1000mm	300 L
1880×1300×1200	380V/50-60Hz	50 kW	Φ 1200mm	650 L





法式糕点馅料机 (主要参数)

French Pastry Filling Machine (Parameters)


尺寸 (mm) Dimensions	电压/频率 Voltage/Frequency	加热功率 Heating Power	内桶径/深度 Internal Drum/Depth	锅容量 Capacity	Induction + Heat Transfer Oil
1550×1160×1330	380V/50-60Hz	15 kW	Φ 700/400mm	100 L	
1750 ×1280 ×1465	380V/50-60Hz	25 kW	Φ 900/400mm	200 L	



四门/八门智能微压蒸柜 (主要参数)

Four-door / Eight-door Micro-pressure Steam (Parameters)


尺寸 (mm) Dimensions	电压/频率 Voltage/Frequency	加热功率 Heating Power	饭盘数量(Pieces) Rice Plate Number	饭盘尺寸(mm) Rice Plate Dimension
852×756×1677	380V/50-60Hz	18 kW	12	600×400×48
1420×756 ×1660	380V/50-60Hz	16 kW×2	12×2	600×400×48

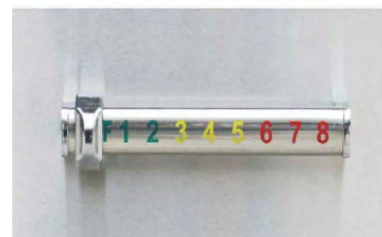

单头电磁大炒炉 (主要参数)

Single-head Induction Wok Range (Parameters)

外形尺寸(mm) Dimensions	电功率 Elec. Power	电压/频率 Voltage/Frequency	锅外径 Pot Outside Dim	锅容积 Pot Capacity	用餐人数 Serving Capacity
800×900×(800+400)	12 kW	380V/50-60Hz	Φ 600 mm	24 L	30-50
900×1000×(800+400)	15 kW	380V/50-60Hz	Φ 700 mm	39 L	50-100
1000×1100×(800+400)	20 kW	380V/50-60Hz	Φ 800 mm	61 L	100-150
1100×1200×(800+400)	25 kW	380V/50-60Hz	Φ 900 mm	82 L	150-200
1200×1300×(800+400)	30 kW	380V/50-60Hz	Φ 1000 mm	108 L	200-300
1400×1500×(800+400)	35 kW	380V/50-60Hz	Φ 1200 mm	190 L	300-400

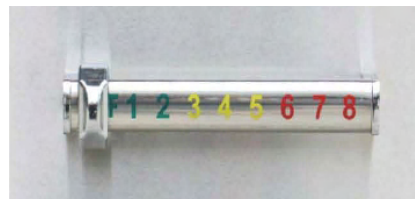

双头电磁大炒炉 (主要参数)

Duel-head Induction Wok Range (Parameters)

外形尺寸(mm) Dimensions	电功率 Elec. Power	电压/频率 Voltage/Frequency	锅外径 Pot Outside Dim	锅容积 Pot Capacity	用餐人数 Serving Capacity
1500×900×(800+400)	12 kW×2	380V/50-60Hz	Φ 600 mm×2	24 L×2	60-100
1700×1000×(800+400)	15 kW×2	380V/50-60Hz	Φ 700 mm×2	39 L×2	100-200
1900×1100×(800+400)	20 kW×2	380V/50-60Hz	Φ 800 mm×2	61 L×2	200-300
2100×1200×(800+400)	25 kW×2	380V/50-60Hz	Φ 900 mm×2	82 L×2	300-400
2300×1300×(800+400)	30 kW×2	380V/50-60Hz	Φ 1000 mm×2	108 L×2	400-600



双头电磁大炒炉 (主要参数)

Dual-head Induction Wok Range (Parameters)

外形尺寸(mm) Dimensions	电功率 Elec. Power	电压/频率 Voltage/Frequency	锅外径 Pot Outside Dim	锅容积 Pot Capacity	用餐人数 Serving Capacity
1500×900×(800+400)	12 kW×2	380V/50-60Hz	Φ 600 mm×2	24 L×2	60-100
1700×1000×(800+400)	15 kW×2	380V/50-60Hz	Φ 700 mm×2	39 L×2	100-200
1900×1100×(800+400)	20 kW×2	380V/50-60Hz	Φ 800 mm×2	61 L×2	200-300
2100×1200×(800+400)	25 kW×2	380V/50-60Hz	Φ 900 mm×2	82 L×2	300-400
2300×1300×(800+400)	30 kW×2	380V/50-60Hz	Φ 1000 mm×2	108 L×2	400-600

磁控开关
Magnetic Switch摇摆水龙头
Switch Faucet

单头单尾小炒炉 (主要参数)

Single-tail Single Frying (Parameters)



外形尺寸 Dimensions	电功率 Elec. Power	电压/频率 Voltage/Frequency	锅外径 Pot Outside Dim	漏电开关 Leakage Breaker
1000×1100×(800+400)mm	12 kW	380V/50-60Hz	Φ500 mm	63 A
1000×1100×(800+400)mm	15 kW	380V/50-60Hz	Φ500 mm	63 A

温控显示器
Temperature Display红外线探温仪
IR Sensor

无线温控小炒炉 (主要参数)

Wireless Temperature Control Fryer (Parameters)


外形尺寸 Dimensions	电功率 Elec. Power	电压/频率 Voltage/Frequency	锅外径 Pot Outside Dim	温控 Temperature Control
800×800×(800+400)mm	12 kW	380V/50-60Hz	Φ600 mm	63 A
800×800×(800+400)mm	15 kW	380V/50-60Hz	Φ600 mm	63 A

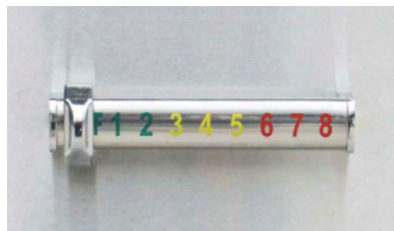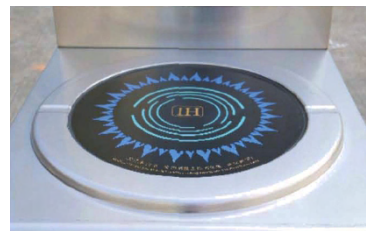磁控开关
Magnetic Switch微晶面板
Microcrystal Panel

单头电磁煲汤炉 (主要参数)

Induction Single Soup kettle (Parameters)

外形尺寸(mm) Dimensions	电功率 Elec. Power	电压/频率 Voltage/Frequency	锅外径(mm) Pot Outside Dim	锅容积 Pot Capacity	烧水耗时 Boiling Time	微晶玻璃 Microcrystal Glass
650×750×(500+700)	12 kW	380V/50-60Hz	Φ 500×500	98 L	45 min	430 mm
650×750×(500+700)	15 kW	380V/50-60Hz	Φ 500×500	98 L	36 min	430 mm

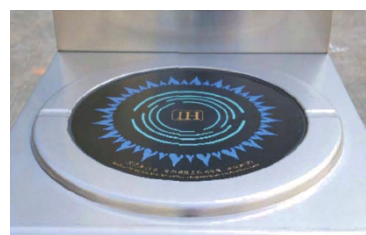显示屏
Display Screen微晶面板
Microcrystal Panel

双头电磁煲汤炉 (主要参数)

Induction Dual Soup kettle (Parameters)

外形尺寸(mm) Dimensions	电功率 Elec. Power	电压/频率 Voltage/Frequency	锅外径(mm) Pot Outside Dim	锅容积 Pot Capacity	烧水耗时 Boiling Time	微晶玻璃 Microcrystal Glass
1300×750×(500+700)	12 kW×2	380V/50-60Hz	Φ 500×500	98 L×2	45 min	430 mm
1300×750×(500+700)	15 kW×2	380V/50-60Hz	Φ 500×500	98 L×2	36 min	430 mm



羊肉汤锅 (主要参数)

Mutton Soup Pot (Parameters)

外形尺寸(mm) Dimensions	电功率 Electric Power	电压/频率 Voltage/Frequency	锅外径(mm) Pot Outside Diameter	锅容积 Pot Capacity
800×900×(800+100)	12 kW	380V/50-60Hz	Φ 600	73 L
900×1000×(800+100)	15 kW	380V/50-60Hz	Φ 700	103 L
1000×1100×(800+100)	20 kW	380V/50-60Hz	Φ 800	146 L
1100×1200×(800+100)	25 kW	380V/50-60Hz	Φ 900	192 L
1200×900×(800+100)	30 kW	380V/50-60Hz	Φ 1000	246 L



一体式电磁煲汤炉 (主要参数)

Combo Induction Soup Pot (Parameters)

外形尺寸(mm) Dimensions	电功率 Electric Power	电压/频率 Voltage/Frequency	锅外径(mm) Pot Outside Diameter	锅容积 Pot Capacity
900×1000×(800+400)	15 kW	380V/50-60Hz	Φ 700	230 L
1000×1100×(800+400)	20 kW	380V/50-60Hz	Φ 800	300 L
1100×1200×(800+400)	25 kW	380V/50-60Hz	Φ 900	380 L
1200×1300×(800+400)	30 kW	380V/50-60Hz	Φ 1000	470 L
1400×1500×(800+400)	30 kW	380V/50-60Hz	Φ 1200	650 L



圆形羊肉汤锅 (主要参数)

Circular Mutton Soup Pot (Parameters)

外形尺寸(mm) Dimensions	电功率 Electric Power	电压/频率 Voltage/Frequency	锅径(mm) Pot Diameter	锅容积 Pot Capacity
2100×(1000+50)	40 kW	380V/50-60Hz	Φ 1500	750 L



电磁煎包炉 (主要参数)

Induction Pancake Griddle (Parameters)

外形尺寸 Dimensions	电功率 Elec. Power	电压/频率 Voltage/Frequency	锅径 Pot Dimension	微晶玻璃 Microcrystal Glass	旋转方式 Rotation Mode
800×800×(800+50)mm	8 kW	380V/50-60Hz	Φ600 mm	500 mm	人工旋转 Manual



台式旋转煎包炉 (主要参数)

Tabletop Rotating Griddle (Parameters)

外形尺寸 Dimensions	电功率 Elec. Power	电压/频率 Voltage/Frequency	锅径 Pot Dimension	微晶玻璃 Microcrystal Glass	旋转方式 Rotation Mode
700×700×(800+50)mm	5 kW	220V/50-60Hz	Φ500 mm	430 mm	自动旋转 Automatic
650×800×(800+50)mm	5 kW	220V/50-60Hz	Φ500 mm	430 mm	自动旋转 Automatic



电磁肠粉炉 (主要参数)

Induction Steamed Vermicelli Roll Stove (Parameters)


外形尺寸 /Dimensions	功率 /Power	电压 /Voltage	频率 /Frequency	蒸盘尺寸 /Steam Pot Dimension
800×800×(800+50)mm	15 kW	380V	50-60Hz	500×500 mm
800×800×(800+50)mm	20 kW	380V	50-60Hz	500×500 mm



电磁双头七星蒸包炉 (主要参数)

Dual-head Seven-star Induction Steamer (Parameters)

外形尺寸 /Dimensions	功率 /Power	电压 /Voltage	频率 /Frequency	锅径 /Pot Dimension
1600×800×(800+50)mm	15 kW×2	220V	50-60Hz	Φ500 mm
1600×800×(800+50)mm	20 kW×2	220V	50-60Hz	Φ500 mm

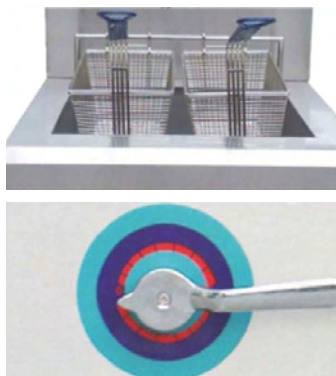

单缸电磁炸炉 (主要参数)

Single-cylinder Induction Fryer (Parameters)

外形尺寸 Dimensions	电功率 Elec. Power	电压/频率 Voltage/Frequency	油缸 Oil Cylinder	炸篮数量 Frying Baskets
500×800×(800+100)mm	8 kW	380V/50-60Hz	400×400×250	2
1000×800×(800+50)mm	12 kW×2	380V/50-60Hz	400×400×250	4



单缸带控油盆炸炉 (主要参数)

Oil Control Single-cylinder Fryer (Parameters)

外形尺寸 Dimensions	电功率 Elec. Power	电压/频率 Voltage/Frequency	油缸 Oil Cylinder	炸篮数量 Frying Baskets
570×700×(800+250)mm	8 kW	380V/50-60Hz	400×400×250	2
1000×800×(800+50)mm	12 kW	380V/50-60Hz	400×400×250	2



四缸电磁炸炉 (主要参数)

Four-Cylinder Induction Fryer (Parameters)

外形尺寸 /Dimensions	功率 /Power	电压 /Voltage	频率 /Frequency	油缸 /Oil Cylinder
1500×650×(800+150)mm	5 kW×4	380V	50-60Hz	310×410×250 mm



长方形电磁炉 (主要参数)

Rectangular Induction Cooker (Parameters)

外形尺寸 Dimensions	电功率 Elec. Power	电压/频率 Voltage/Frequency	油缸 Oil Cylinder	容量 /Capacity
1450×750×700 mm	30 kW	380V/50-60Hz	1000×650×350 mm	227 L
2000×1400×700 mm	50 kW	380V/50-60Hz	1400×1200×600 mm	1000 L



带压板长方形电磁炉 (主要参数)

Square Induction Cooker with Pressing Plate (Parameters)

外形尺寸 Dimensions	电功率 Elec. Power	电压/频率 Voltage/Frequency	油缸尺寸 Oil Cylinder Dimension	容量 /Capacity
1450×750×700 mm	30 kW	380V/50-60Hz	1000×650×350 mm	270 L



电磁煲仔炉 (主要参数)

Induction Pot Furnace (Parameters)


设备名称 Product Name	外形尺寸(mm) Dimensions	电功率 Elec. Power	电压/频率 Voltage/Frequency	微晶玻璃 Microcrystal Glass
四头煲仔炉 /Four-head Pot Furnace	800×800×(800+50)	3.5 kW×4	380V/50-60Hz	300×300 mm
六头煲仔炉 /Four-head Pot Furnace	1200×800×(800+50)	3.5 kW×6	380V/50-60Hz	300×300 mm
八头煲仔炉 /Four-head Pot Furnace	1600×800×(800+50)	3.5 kW×8	380V/50-60Hz	300×300 mm



电磁煮面炉 (主要参数)

Induction Noodle Cooker (Parameters)


设备型号 Product Model	外形尺寸(mm) Dimensions	电功率 Power	电压/频率 Voltage/Frequency	面篓 Noodle Basket	水缸1 (mm) Water Tank Size	水缸2 (mm) Water Tank Size
四头单缸 Four-head Single Cylinder	800×800×(800+400)	12 kW	380V/50-60Hz	Φ140/160	450×450×300	/
六头单缸 Six-head Single Cylinder	800×1000×(800+400)	15 kW	380V/50-60Hz	Φ140/160	450×600×300	/
六头双缸 Six-head Dual Cylinder	1100×1000×(800+400)	23 kW	380V/50-60Hz	Φ140/160	450×450×300	250×450×300
九头单缸 Nine-head Dual Cylinder	1200×900×(800+400)	23 kW	380V/50-60Hz	Φ140/160	450×600×300	250×600×300



电磁日式扒炉 (主要参数)

Japanese Induction Griddle (Parameters)

外形尺寸 / Dimensions	功率 Power	电压/频率 Voltage/Frequency	内置烟道 Inner exhaust duct
1800×800×(800+100)mm	8 kW	380V/50-60Hz	350×50mm

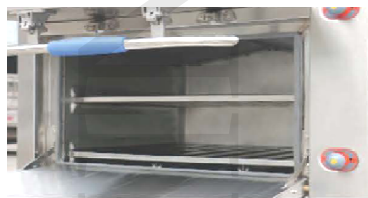

三门海鲜电磁蒸柜 (主要参数)

3-door Seafood Induction Steamer (Parameters)

外形尺寸 /Dimensions	电功率 /Elec. Power	额定电压 /Voltage	额定频率 /Frequency	
900×900×1850 mm	25 kW	380V	50-60Hz	
1100×900×1850 mm	30 kW	380V	50-60Hz	



双门双控电磁蒸饭柜 (主要参数)

Dual Control Induction Rice Steamer (Parameters)

尺寸 /Dimensions	电功率 /Elec. Power	电压/频率 Voltage//Frequency	饭盘数量 /Pans	饭盘规格 /Pan Size
1200×850×1850 mm	15 kW×2	380V/50-60Hz	24 Pieces	600×400×48mm
1500×1100×1650 mm	20 kW×2	380V/50-60Hz	36 Pieces	
1500×1100×1850 mm	25 kW×2	380V/50-60Hz	48 Pieces	

台式平面电磁炉 (主要参数)
Tabletop Flat Induction cooker

外形尺寸(mm) Dimensions	功率 Power	电压/频率 Voltage/Frequency	微晶玻璃(mm) Microcrystal Glass
400×435×195	5 kW	220V/50-60Hz	300×300

台式平面电磁炉 (主要参数)
Tabletop Flat Induction cooker

外形尺寸(mm) Dimensions	功率 Power	电压/频率 Voltage/Frequency	微晶玻璃(mm) Microcrystal Glass
500×520×350	8 kW	380V/50-60Hz	400×400

台式凹面电磁炉 (主要参数/Parameters)
Tabletop Concave Induction cooker

外形尺寸(mm) Dimensions	功率 Power	电压/频率 Voltage/Frequency	微晶玻璃(mm) Microcrystal Glass
400×435×195	5 kW	220V/50-60Hz	Φ 300

台式凹面电磁炉 (主要参数/Parameters)
Tabletop Concave Induction cooker


外形尺寸(mm) Dimensions	功率 Power	电压/频率 Voltage/Frequency	微晶玻璃(mm) Microcrystal Glass
500×520×350	8 kW	380V/50-60Hz	Φ 400



台式电磁炸炉 (主要参数)

Tabletop Induction Frying (Parameters)

外形尺寸(mm) Dimensions	功率 Power	电压/频率 Voltage/Frequency	油缸尺寸(mm) Oil Cylinder Size
600×600×380	5 kW	220V/50-60Hz	400×400×180



台式电磁煮面炉 (主要参数)

Tabletop Induction Noodle Cooker (Parameters)

外形尺寸(mm) Dimensions	功率 Power	电压/频率 Voltage/Frequency	油缸尺寸(mm) Oil Cylinder Size
600×600×380	5 kW	220V/50-60Hz	400×400×180



台式电磁蒸包炉 (主要参数)

Tabletop Induction Bun Steamer (Parameters)

外形尺寸(mm) Dimensions	功率 Power	电压/频率 Voltage/Frequency	油缸尺寸(mm) Oil Cylinder Size
600×600×380	15 kW	380V/50-60Hz	400×400×180



万能蒸烤箱 系列

Combi oven Series



强大·高效·小巧 / Powerful • Efficient • Compact

【快捷】

强大的蒸汽锅炉可实现前所未有的烹饪速度。仅7分钟内即可烹饪满载的西兰花。蒸烤组合模式下仅30分钟即可完美烹饪24只烤全鸡。

【高效】

创新的VCS蒸汽清洁系统，较之以往设备可降低能耗达30%。

【坚固】

简化安装及维护计划，减少服务干预时间。

【强大】

高效并不意味着消耗更多的能源。全新设计的能源供应系统，较之以往设备效率提高20%，且最多可节省16%的能耗。

【精确】

控制系统在任何时候都能保持温度的稳定和准确，且提供您最理想的湿度，保证出品的色泽和口感。

【小巧】

每个厨房里必备的高标准设备，符合HACCP要求，大容量的烹饪加上紧凑性的设计，可为您节省了15%的空间。

Fast (Quick Cooking)

A robust steam boiler enables unprecedented cooking speeds. It can cook a full tray of broccoli in just 7 minutes. In the combined steam and roast mode, it can perfectly cook 24 whole chickens in only 30 minutes.

Efficient (Energy Saving)

The innovative VCS steam cleaning system reduces energy consumption by up to 30% compared to previous models.

Durable (Low Maintenance)

Simplifies installation and maintenance, minimizing service intervention time.

Powerful (High Efficiency, Low Energy Consumption)

High efficiency does not mean higher energy consumption. The newly designed energy supply system improves efficiency by 20% and can save up to 16% in energy costs.

Precise (Temperature and Humidity Control)

The control system maintains stable and accurate temperatures at all times, providing the optimal humidity to ensure the color and taste of the dishes.

Compact (Space-Saving Design)

Essential high-standard equipment for any kitchen, compliant with HACCP standards. The large cooking capacity combined with a compact design saves 15% of space.



✓ 对流烹饪模式

独有的炉腔热量分布系统，可使烹饪火候达到前所未有的均匀性。快速抽湿系统可使食物干爽松脆，而间歇性风速调节系统可让您的食物更柔软多汁。

✓ Convection Cooking Mode

The unique cavity heat distribution system ensures an unprecedented level of even cooking. The rapid moisture removal system makes food crisp and dry, while the intermittent fan speed adjustment system keeps food tender and juicy.

✓ 蒸煮模式

识别食材种类及份量智能释放蒸汽，保持食物所有的营养价值。

50-85°C精准低温蒸煮，减少对调料、水与盐的需求。

100°C蒸汽模式可用于传统沸水氽烫的食材。

130°C强力蒸煮则用于加工冷冻食材。

✓ Steaming Mode

It intelligently releases steam based on the type and quantity of ingredients, preserving all the nutritional value of the food.

Precise Low Temperature Steaming: With a precise temperature range of 50-85° C, it reduces the need for additional seasonings, water, and salt. **100° C Steam Mode:** Suitable for traditional blanching of ingredients, similar to boiling in water. **130° C Intensive Steaming:** Designed for processing frozen ingredients, providing a powerful steaming capability.

✓ 组合烹饪模式

温度与湿度都被自动控制在最理想状态，湿度系统可使肉类获得最佳的烹饪效果。多点探针确保食物中心温度精确，即时回温操作也能确保效果。

✓ Combination Cooking Mode

Temperature and humidity are automatically controlled at the most ideal levels. The humidity system optimizes the cooking of meats, and multiple probes ensure the precise temperature at the center of the food, with immediate temperature recovery to maintain quality.

✓ 烹饪程序

预置95道烹饪程序，同时用户可编制多达99道烹饪程序。包括定制烹饪模式、温湿度、风扇转速等参数。

✓ Cooking Programs

Pre-set with 95 cooking programs, and users can create up to 99 custom programs, including custom cooking modes, temperature and humidity settings, and fan speed adjustments.

✓ 自清洁程序

内置7种清洗程序，较之传统设备清洗时间减半，提高设备的工作效率，且减少30%清洁剂消耗。

✓ Self-cleaning Program

Equipped with 7 cleaning programs that halve the cleaning time compared to traditional models, enhancing the efficiency of the equipment and reducing cleaning agent consumption by 30%.



061



101



062



102

直接蒸汽型 (主要参数)

Direct Steam Type (Parameters)

型号 Model	能源种类 Elec./Gas	GN容量 GN Num.	间距(mm) Spacing	供餐人数 Diners Num.	电功率(kW) Elec. Power	燃气功率(kW) Gas Power	电流 (A) Elec. Current	外形尺寸(mm) Dimensions	电压/频率 (V/Hz)
COE061BV	Elec.	6× 1/1	70	30/80	11.6	/	18	852×797×775	380/50
COG061BV	Gas	6× 1/1	70	30/80	0.6	13	2.6	852×797×775	220/50
COE101BV	Elec.	10× 1/1	70	80/150	18.7	/	29	852×797×1055	380/50
COG101BV	Gas	10× 1/1	70	80/150	0.7	22	3	852×797×1055	220/50
COE062BV	Elec.	6× 2/1 12× 1/1	70	60/160	22.2	/	34	1072×907×775	380/50
COG062BV	Gas	6× 2/1 12× 1/1	70	60/160	0.7	26	3	1072×907×775	220/50
COE102BV	Elec.	10× 2/1 20× 1/1	70	150/300	36.7	/	55	1072×907×1055	380/50
COG102BV	Gas	10× 2/1 20× 1/1	70	150/300	0.7	42	5	1072×907×1055	220/50

蒸汽锅炉型/选配 (主要参数)

Direct Boiler Type/ Optional (Parameters)

型号 Model	能源种类 Elec./Gas	GN容量 GN Num.	间距(mm) Spacing	供餐人数 Diners Num.	电功率(kW) Elec. Power	燃气功率(kW) Gas Power	电流 (A) Elec. Current	外形尺寸(mm) Dimensions	电压/频率 (V/Hz)
COE061BS	Elec.	6× 1/1	70	30/80	11.6	/	18	852×797×775	380/50
COG061BS	Gas	6× 1/1	70	30/80	0.7	13	3	852×797×775	220/50
COE101BS	Elec.	10× 1/1	70	80/150	18.7	/	29	852×797×1055	380/50
COG101BS	Gas	10× 1/1	70	80/150	0.8	22	3.5	852×797×1055	220/50
COE062BS	Elec.	6× 2/1 12× 1/1	70	60/160	22.2	/	34	1072×907×775	380/50
COG062BS	Gas	6× 2/1 12× 1/1	70	60/160	0.8	26	3.5	1072×907×775	220/50
COE102BS	Elec.	10× 2/1 20× 1/1	70	150/300	36.7	/	55	1072×907×1055	380/50
COG102BS	Gas	10× 2/1 20× 1/1	70	150/300	0.8	42	5.5	1072×907×1055	220/50



161



201



202

直接蒸汽型 (主要参数)


Direct Steam Type (Parameters)

型号 Model	能源种类 Elec./Gas	GN容量 GN Num.	间距(mm) Spacing	供餐人数 Diners Num.	电功率(kW) Elec. Power	燃气功率(kW) Gas Power	电流 (A) Elec. Current	外形尺寸(mm) Dimensions	电压/频率 (V/Hz)
COE161BV	Elec.	6× 1/1+ 10× 1/1	70	110/230	30.2	/	47	852×845×1840	380/50
COG161BV	Gas	6× 1/1+ 10× 1/1	70	110/230	1.4	35	6.1	852×845×1840	220/50
COE201BV	Elec.	20× 1/1	63	150/300	37.2	/	58	892×862×1812	380/50
COG201BV	Gas	20× 1/1	63	150/300	1.3	44	5.7	892×862×1812	220/50
COE202BV	Elec.	20× 2/1 40× 1/1	63	300/500	73.2	/	110	1102×932×1812	380/50
COG202BV	Gas	20× 2/1 40× 1/1	63	300/500	1.4	80	6.1	1102×932×1812	220/50

蒸汽锅炉型/选配 (主要参数)

Direct Boiler Type/ Optional (Parameters)

型号 Model	能源种类 Elec./Gas	GN容量 GN Num.	间距(mm) Spacing	供餐人数 Diners Num.	电功率(kW) Elec. Power	燃气功率(kW) Gas Power	电流 (A) Elec. Current	外形尺寸(mm) Dimensions	电压/频率 (V/Hz)
COE161BS	Elec.	6× 1/1+ 10× 1/1	70	110/230	30.2	/	47	852×845×1840	380/50
COG161BS	Gas	6× 1/1+ 10× 1/1	70	110/230	1.4	40	6.1	852×845×1840	220/50
COE201BS	Elec.	20× 1/1	63	150/300	37.2	/	58	892×862×1812	380/50
COG201BS	Gas	20× 1/1	63	150/300	1.3	52	5.7	892×862×1812	220/50
COE202BS	Elec.	20× 2/1 40× 1/1	63	300/500	73.2	/	110	1102×932×1812	380/50
COG202BS	Gas	20× 2/1 40× 1/1	63	300/500	1.4	90	6.1	1102×932×1812	220/50

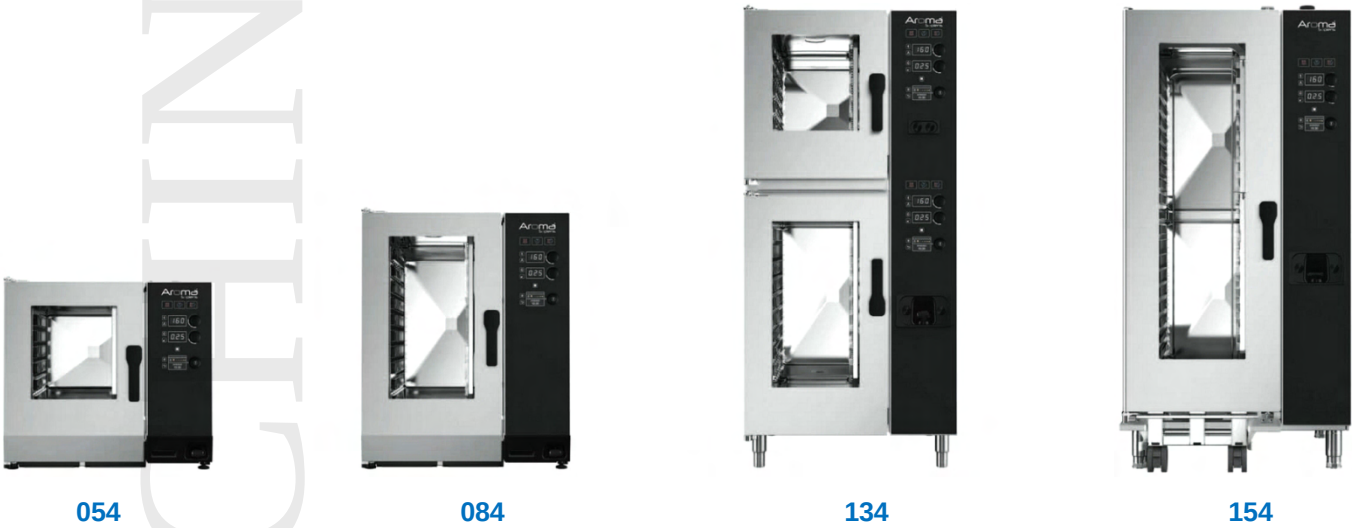

直接蒸汽型 (主要参数)

Direct Steam Type (Parameters)

型号 Model	能源种类 Elec./Gas	EN容量(mm) GN Capacity	间距(mm) Spacing	电功率(kW) Elec. Power	燃气功率(kW) Gas Power	电流 (A) Elec. Current	外形尺寸(mm) Dimensions	电压/频率 (V/Hz)
COE054BV	Elec.	5×(600×400)	90	11.6	/	18	852×797×775	380/50
COG054BV	Gas	5×(600×400)	90	0.6	13	2.6	852×797×775	220/50
COE084BV	Elec.	8×(600×400)	90	18.7	/	29	852×797×1055	380/50
COG084BV	Gas	8×(600×400)	90	0.7	22	3	852×797×1055	220/50
COE134BV	Elec.	5×(600×400)+8×(600×400)	90	30.2	/	47	852×860×1840	380/50
COG134BV	Gas	5×(600×400)+8×(600×400)	90	1.4	35	6.1	852×860×1840	220/50
COE154BV	Elec.	15×(600×400)	89	37.2	/	58	892×862×1812	380/50
COG154BV	Gas	15×(600×400)	89	1.3	44	5.7	892×862×1812	220/50

EN 容量：
例：5×(600×400)代表放置5层600×400mm的标准烤箱烤盘。





026



061



101



061

蒸汽锅炉型/选配 (主要参数)

Direct Boiler Type/ Optional (Parameters)

型号 Model	能源种类 Elec./Gas	GN容量 GN Num.	间距(mm) Spacing	供餐人数 Diners Num.	电功率(kW) Elec. Power	燃气功率(kW) Gas Power	电流 (A) Elec. Current	外形尺寸(mm) Dimensions	电压/频率 (V/Hz)
COE026R	Elec.	6× 2/3	60	20/50	5.25	/	8	510×625×880	380/50
COE061R	Elec.	6× 1/1	60	30/80	7.75	/	11	510×800×880	380/50
COE101R	Elec.	10× 1/1	60	80/150	15.5	/	22	510×800×1120	380/50
COE061RV	Elec.	6× 1/1	60	30/80	8.25	/	12	875×650×705	380/50
COG061R	Gas	6× 1/1	60	30/80	0.5	8.5	2.2	875×650×705	220/50

蒸汽锅炉型/选配 (主要参数)

Direct Boiler Type/ Optional (Parameters)

型号 Model	能源种类 Elec./Gas	GN容量 GN Num.	间距(mm) Spacing	供餐人数 Diners Num.	电功率(kW) Elec. Power	燃气功率(kW) Gas Power	电流 (A) Elec. Current	外形尺寸(mm) Dimensions	电压/频率 (V/Hz)
COE061RS	Elec.	6× 1/1	60	30/80	8.25	/	12	875×650×705	380/50

满足各种需求

Meet Your Various Needs



I 实用性
全不锈钢底座
搭配不同高度

I Practicality:
All-stainless steel
base with adjustable
heights.



I 组合性
可搭配急冻柜
满足空间需求

I Modularity
Can be paired with
blast chillers to meet
space requirements.



I 醒发
可搭配醒发柜,
用于糕点烘焙

I Proofing
Can be paired with
proofing cabinets for
pastry baking.



I 叠加
通过烤箱叠加,
增加使用功能

I Stack ability:
Increase functionality
by stacking ovens.



I 多种烤盘
可使用标准GN盆或
600×400mm烤盘

I Versatile Pans
Compatible with GN pans
or 600×400mm pans.

EU60 揭盖式洗碗机

EU60 Uncovery Dishwasher



性能特点 /Performance Characteristic

- Ø 主材采用304不锈钢，通过CE认证
 - Ø 三档清洗模式，清洗需求更加人性化
 - Ø 组合式加热组件，适用于不同进水温度
 - Ø 轻触式操作面板，人机交互更便捷
 - Ø 清洗臂和喷淋臂上下通用且容易拆卸
 - Ø 封闭式洗涤室设计，军地热量和蒸汽散失
 - Ø 单层揭盖和限高位设计，有效防止超温现象
- Ø The main material is 304 stainless steel, passed CE certification.
 - Ø 3 level cleaning mode, more user-friendly cleaning requirements.
 - Ø Combination heating components, suitable for different inlet water temperatures;
 - Ø Light touch operation panel, more convenient human-machine interaction.
 - Ø The cleaning arm and spray arm are universal and easy to disassemble.
 - Ø Closed washing room design, military and civilian heat and steam dissipation.
 - Ø Single layer uncovering and high limit design effectively prevent overheating phenomenon.

洗涤量参考 /Washing Capacity Reference

餐具规格/Tableware Type	6寸碟 6" plate	10寸碟 10" plate	18寸碟 18" plate	4.5寸碟 4.5" plate	杯子 cups	刀叉 Knife/fork	筷子 chopsticks
洗涤量/Washing Capacity	1080-1620	720-1080	360-540	640-960	1440-2160	1800-7200	9600-14400

主要技术参数 /Technical Parameters

ü 规格尺寸 /Dimensions (mm)	725×750×1522
ü 洗涤能力(筐/小时) /Washing capacity (baskets/hour)	60 or 40 or 30
ü 餐具筐尺寸(毫米) /Cutlery basket size (mm)	500×500
ü 最大洗涤高度(毫米) /The max washing height (mm)	450
ü 操作面板模式 /Operator panel mode	触摸式
ü 耗电量(千瓦) /Electric power (kW)	15.8
ü 清洗泵功率(千瓦) /Cleaning pump power (kW)	0.75
ü 洗涤加热功率(千瓦) /Wash heating power (kW)	3
ü 喷淋加热功率(千瓦) /Spray heating power (kW)	12
ü 耗水量(升/筐) Water consumption (liter/basket)	2.5
ü 水箱容积(升) Water tank capacity (liter)	26

安装要求 /Installation Requires

- 电源：380V/50Hz/3p
 - 进水管径：6(ft)，排水管径：32mm
 - 进水压力：1.5-2bar，超过3bar需安装减压阀
 - 进水温度：10-65℃，最高不要超过65℃
 - 进水硬度：0.034-0.103g/L
- Power: 380V/50Hz/3p
 - Inlet diameter: 6(ft), Drain diameter: 32mm
 - Water pressure: 1.5-2 bar, over 3bar need to install pressure reducing valve
 - Water temperature: 10-50℃, The max temperature must ≤65℃
 - Water Hardness: 0.034-0.103g/L

EL200 通道式洗碗机

EL200 Channel Type Dishwasher



性能特点 /Performance Characteristic

- Ø 主材采用304不锈钢，通过CE认证
 - Ø 组装式清洗臂及喷嘴，清洗需求更加人性化
 - Ø 不锈钢筛盘和大型深筛篮可拆卸清洗
 - Ø 门开关自动锁止功能，提高使用安全性
 - Ø 马达过载保护功能，防止操作不当造成损坏
 - Ø 自动进水系统、自动温控系统、水箱缺水保护功能
- Ø The main material is 304 stainless steel, passed CE certification.
 - Ø Assembled cleaning arm and nozzle, more user-friendly cleaning requirements.
 - Ø Stainless steel sieve tray and large deep sieve basket can be disassembled for cleaning.
 - Ø The automatic locking function of the door switch improves the safety of use.
 - Ø Motor overload protection function to prevent damage caused by improper operation.
 - Ø Automatic water inlet system, automatic temperature control system, and water tank shortage protection function.

洗涤量参考 /Washing Capacity Reference

餐具规格/Tableware Type	6寸碟 6" plate	10寸碟 10" plate	18寸碟 18" plate	4.5寸碟 4.5" plate	杯子 cups	刀叉 Knife/fork	筷子 chopsticks
洗涤量/Washing Capacity	5481	3654	1827	3248	7308	24360	48720

主要技术参数 /Technical Parameters

设备名称 /Name	通道式洗碗机 /Channel Type Dishwasher
设备型号 /Model	EL200 (单缸单喷) /EL200G1P2 (单缸双喷) /EL200G2P1 (双缸单喷) /EL200G2P2 (双缸双喷)
规格尺寸(毫米) /Dimensions (mm)	1100×782×1742
洗涤能力(筐/小时) /Washing capacity	203 (baskets/hour)
加热模式 /Heating mode	电加热/蒸汽加热/燃气加热 Elec. Heating / Steam Heating / Gas Heating

用电量及喷淋加热器配置 Electricity And Spray Heater Configuration

型号	加热方式	总用电量	进水温度	清洗加热器	喷淋加热器	其他
EL200-C	电力	46kW	10-50°C	7.5kW	36kW	1.7kW
EL200-Z	蒸汽	1.7kW				
EL200-Q	燃气	10kW				

安装要求 /Installation Requires

- 电源：380V/50Hz/3p
- 蒸汽压力：0.5-3.5bar，蒸汽耗量：70kg/h
- 燃气压力：≥0.15Mpa，燃气耗量：5-5.5m³/h
- 进水管径：6(ft)，排水管径：2(in)
- 进水压力：1-1.7kg/cm²，超过1.7需安装减压阀
- 进水温度：10-50°C
- 进水硬度：0.034-0.103g/L

- Power: 380V/50Hz/3p
- Steam pressure: 0.5-3.5Bar, Steam consumption: 70kg/h
- Gas connection: water pressure ≥ 0.15Mpa, Gas consumption: 5-5.5m³/h
- Inlet diameter: 6(ft), Drain diameter: 2(in)
- Water pressure: 1-1.7kg/cm², over 1.7 need to install pressure reducing valve
- Water temperature: 10-50°C,
- Water Hardness: 0.034-0.103g/L

EDM2300 迷你长龙式洗碗机 Long Queue of Mini Dishwasher



性能特点 /Performance Characteristic

- Ø 主材采用304不锈钢，通过CE认证
- Ø 组装式清洗臂和喷嘴，易于拆卸清洗
- Ø 敞门式双层隔热设计，降低水蒸汽使用危险性
- Ø 传送速度变频可调，客户有更大的选择范围
- Ø 传送保护系统，防止餐具滑落造成损坏
- Ø The main material is 304 stainless steel, passed CE certification.
- Ø Assembled cleaning arm and nozzle, easy to disassemble for cleaning.
- Ø Open door double-layer insulation design reduces the risk of water vapor use.
- Ø The transmission speed is variable frequency and adjustable, providing customers with a wider range of choices.
- Ø Transport protection system to prevent damage caused by utensils slipping off.

主要技术参数 /Technical Parameters

设备形式 (Equipment Type)	单缸 长龙式	双缸 长龙式	三缸 长龙式
外形尺寸 (Dimensions)	3550×888×1996	4250×888×1996	4950×888×1996
洗涤量 (Washing Capacity)	3270 碟/小时	4360 碟/小时	5470 碟/小时
水箱容量 (Tank Volume)	1×87 升	2×87 升	3×87 升
耗水量 (Water Consumption)	300 升/小时	300 升/小时	300 升/小时
传送速度 (Transmission Speed)	1.5 米/分钟	2 米/分钟	2.5 米/分钟
电功率 (Electric Power)			
纯电力 机型 (Electric)	380V , 58kW	380V , 69kW	380V , 80kW
蒸汽+电 机型 (Steam + Electric)	380V , 12kW	380V , 14kW	380V , 17kW
燃气+电 机型 (Gas + Electric)	380V , 21.8kW	380V , 33kW	380V , 44kW
风量 (Air Flow)	4000 立方/小时		

安装要求 /Installation Requires

- 电源：380V/50Hz/3p
- 蒸汽压力：0.5-3.5bar，蒸汽耗量：70kg/h
- 燃气压力：≥0.15Mpa，燃气耗量：5-5.5m³/h
- 进水管径：6(ft)，排水管径：2(in)
- 进水压力：1-1.7kg/cm²，超过1.7需安装减压阀
- 进水温度：10-50℃
- 进水硬度：0.034-0.103g/L
- Power: 380V/50Hz/3p
- Steam pressure:0.5-3.5Bar, Steam consumption:70kg/h
- Gas connection: water pressure≥0.15Mpa, Gas consumption: 5-5.5m³/h
- Inlet diameter: 6(ft), Drain diameter: 2(in)
- Water pressure: 1-1.7kg/cm², over 1.7 need to install pressure reducing valve
- Water temperature: 10-50℃,
- Water Hardness: 0.034-0.103g/L

ED系列 长龙式洗碗机

ED Series Long Queue Dishwasher



入口模块 → 除渣模块 → 主洗模块 → 喷淋模块 → 烘干模块 → 出口模块
Entrance → Slag Removal → Main Washing → Spray → Drying → Outlet module

性能特点 / Performance Characteristic

- Ø 主材采用304不锈钢，通过CE认证
- Ø 采用模块化组合设计，针对用户不同需求
- Ø 用户可根据厨房的具体情况，进行定制
- Ø 加热器功率可根据进水温度的不同进行选择
- Ø 烘干模块可根据洗涤餐具的种类进行选择

- Ø The main material is 304 stainless steel, passed CE certification.
- Ø Adopting modular combination design to meet the different needs of users.
- Ø Users can customize according to the specific situation of the kitchen.
- Ø The power of the heater can be selected according to the inlet water temperatures.
- Ø The drying module can be selected according to the type of washing utensils

主要技术参数 / Technical Parameters

设备形式 (Equipment Type)	单缸 长龙式	双缸 长龙式	三缸 长龙式
外形尺寸 (Dimensions)	4250×888×1996	4950×888×1996	5650×888×1996
洗涤量 (Washing Capacity)	3270 快餐盘/小时	4360 快餐盘/小时	5450 快餐盘/小时
水箱容量 (Tank Volume)	1×87 升	2×87 升	3×87 升
耗水量 (Water Consumption)	300 升/小时	300 升/小时	300 升/小时
传送速度 (Transmission Speed)	1.5 米/分钟	2 米/分钟	2.5 米/分钟
电功率 (Electric Power)			
纯电力 机型 (Electric)	380V, 58kW	380V, 69kW	380V, 80kW
蒸汽+电 机型 (Steam + Electric)	380V, 12kW	380V, 14kW	380V, 17kW
燃气+电 机型 (Gas + Electric)	380V, 21.8kW	380V, 33kW	380V, 44kW
风量 (Air Flow)	4000 立方/小时		

安装要求 / Installation Requires

- 电源：380V/50Hz/3p
- 蒸汽压力：0.5-3.5bar，蒸汽耗量：70kg/h
- 燃气压力：≥0.15Mpa，燃气耗量：5-5.5m³/h
- 进水管径：6(ft)，排水管径：2(in)
- 进水压力：1-1.7kg/cm²，超过1.7需安装减压阀
- 进水温度：10-50℃
- 进水硬度：0.034-0.103g/L

- Power: 380V/50Hz/3p
- Steam pressure: 0.5-3.5Bar, Steam consumption: 70kg/h
- Gas connection: water pressure ≥ 0.15Mpa, Gas consumption: 5-5.5m³/h
- Inlet diameter: 6(ft), Drain diameter: 2(in)
- Water pressure: 1-1.7kg/cm², over 1.7 need to install pressure reducing valve
- Water temperature: 10-50℃
- Water Hardness: 0.034-0.103g/L

**厨余垃圾处理单元** Kitchen Waste Disposal Unit

厨余垃圾处理模块单元，可迅速处理各类厨房垃圾，配置创新型独立系统，适用于任意一个厨房或垃圾站。即使在现有设施基础上，也有高效显著的处理效果。

Quickly handle various types of kitchen waste, equipped with innovative independent systems, suitable for any kitchen or garbage station. Even on the basis of existing facilities, there are significant and efficient treatment effects.

型号 (Model)	KW-H400	KW-H600	KW-H800
主材 (Material)	SUS 304	SUS 304	SUS 304
尺寸 (Dimensions) mm	1050×750×900	1200×800×900	1400×800×900
处理量 (Capacity)	400 liters/hour	600 liters/hour	800 liters/hour
适用人数 (Applicable)	1000	2500	3500
噪音 (Noise)	≤ 71 dB		
电源 (Power)	380V 3N ~ 5kW-7.5kW		
进水 (Water Connection)	Hot and Cold Water DN20		
排水 (Drain)	DN50		

**有机垃圾粉碎单元**

可分别置于厨房不同区域，此单元可根据垃圾的实际体积和数量选择最合适的循环选项。

I Organic waste crushing unit

It can be placed in different areas of the kitchen, and the most suitable recycling option can be selected based on the actual volume and quantity of garbage.

I Garbage centralized dewatering unit

Each crushing unit is connected through a pipeline system and the collected garbage is uniformly transported to the dewatering unit for centralized processing. This system can be perfectly embedded in the dishwashing chain, suitable for kitchens with multiple floors.

I Fully automatic biodegradation machine

Including automatic lifting, biodegradation, odor removal system, etc. The garbage is treated with harmless microbial strains, and the remaining 5% volume of dry powdered garbage is composted without any waste gas emissions during the treatment process.

垃圾集中脱水单元

各粉碎单元通过管道系统相连，并将收集的垃圾统一输送至脱水单元集中处理。此系统可完美嵌入碗碟清洗链，适用于有多个楼层的厨房。

全自动生物降解机

包括自动提升、生物降解、除异味系统等。垃圾经微生物菌种无害化处理，最终剩余5%容积的干燥粉末状垃圾堆肥，处理过程中无废气排放。

立式四门冰箱

Upright Four Door Fridge



立式四门冰箱适用于各类商用厨房，也适用于各类中央厨房和预制菜加工厂。内部配有置物层架，使用容积超过900立升，冰箱采用风冷制冷模式，适合冷藏、冷冻贮存各类生熟食物、半成品食物及调料等物品。

suitable for various commercial kitchens, as well as central kitchens and pre packaged food processing plants. Internally equipped with storage shelves, with a capacity of over 900 liters, the refrigerator adopts air-cooled cooling mode, suitable for refrigerated and frozen storage of various raw and cooked foods, semi-finished foods, seasonings, etc.

型 号 (Model)	JDB-90D4	JDB-90C4
主 材 (Material)	SUS 304	
尺 寸 (Dimensions) mm	1220×800×2000	
额定电压/频率 (Rated voltage/frequency) V/Hz	220V / 50Hz (Customizable 60Hz)	
制冷功率 (Cooling Capacity) W	922	
用电功率 (Wattage) W	910	
工作电流 (Ampere) A	4.3	
内部容积 (Gross Volume) Liter	980 (Total Volume)	
制冷温度 (Temperature) °C	-5°C ~ -18°C	0°C ~ +8°C
冷媒/制冷剂 (Refrigerant)	R290	
制冷模式/除霜 (Defrost System)	风冷无霜 Frost-free	
内置货架数量 (PVC Coated Shelving)	6	

立式双玻璃门冰箱 Upright Dual Glass Door Fridge



立式四门冰箱适用于各类商用厨房，也适用于各类中央厨房和预制菜加工厂。内部配有置物层架，使用容积超过900立升，冰箱采用风冷制冷模式，适合冷藏、冷冻贮存各类生熟食物、半成品食物及调料等物品。双大玻璃门设计，内部状态一目了然。

suitable for various commercial kitchens, as well as central kitchens and pre packaged food processing plants. Internally equipped with storage shelves, with a capacity of over 900 liters, the refrigerator adopts air-cooled cooling mode, suitable for refrigerated and frozen storage of various raw and cooked foods, semi-finished foods, seasonings, etc. Double large glass door design, with clear internal status at a glance.

型 号 (Model)	JDB-90D2G	JDB-90C2G
主 材 (Material)	SUS 304	
尺 寸 (Dimensions) mm	1290×800×2090	
额定电压/频率 (Rated voltage/frequency) V/Hz	220V / 50Hz (Customizable 60Hz)	
制冷功率 (Cooling Capacity) W	1300	
用电功率 (Wattage) W	1280	
工作电流 (Ampere) A	5.8	
内部容积 (Gross Volume) Liter	920 (Total Volume)	
制冷温度 (Temperature) °C	-18°C ~ -22°C	0°C ~ +8°C
冷媒/制冷剂 (Refrigerant)	R290	
制冷模式/除霜 (Defrost System)	风冷无霜 Frost-free	
内置货架数量 (PVC Coated Shelving)	10	

平面冷藏冰箱 Counter Top Fridge



平面冷藏冰箱又称冷藏工作台，是上方操作台面和下部冷藏（冷冻）冰箱的结合体。因为它一机多用，结构紧凑，几乎适用于任何需要冷藏物品的场合，例如酒店超市、学校医院厨房；水果冷饮、糕点咖啡商铺等。设备顶部为操作平台，在本设备种下方为冷藏冰箱，制冷温度 $0^{\circ}\text{C}\sim+8^{\circ}\text{C}$ ，适合冷藏贮存食品、酒类、药品、调料等。

Counter top fridge, also known as a refrigeration workbench, is a combination of an upper operating table and a lower refrigerator. Because it is versatile and compact in structure, it is almost suitable for any occasion that requires refrigeration of items, such as hotel supermarkets, school hospital kitchens; Fruit and cold drinks, pastry and coffee shops, etc. The top of the device is the operating platform, and below this device is a refrigerated refrigerator with a cooling temperature of $0^{\circ}\text{C}\sim+8^{\circ}\text{C}$, suitable for storing food, alcohol, drugs, seasonings, etc.

型 号 (Model)	JDB-20PC	JDB-30PC	JDB-40PC
主 材 (Material)	SUS 304		
尺 寸 (Dimensions) mm	1200×780×800	1500×780×800	1800×780×800
额定电压/频率 V/Hz Rated Voltage/Frequency	220V / 50Hz (Customizable 60Hz)		
制冷功率 W Cooling Capacity	243		
用电功率 (Wattage) W	310		
工作电流 (Ampere) A	1.46		
内部容积 Liter Gross Volume	230 (Total Volume)	330 (Total Volume)	425 (Total Volume)
制冷温度 (Temperature) $^{\circ}\text{C}$	$0^{\circ}\text{C}\sim+8^{\circ}\text{C}$		
冷媒/制冷剂 (Refrigerant)	R290		
制冷模式 (Defrost System)	风冷无霜 Frost-free		
内置货架量 PVC Coated Shelving	4		

新品系列—模块式多层货架

New Product Series — Modular multi-layer shelves



多层货架用途普遍，广泛适用于各商用贮藏空间，包括军队企业、医院学校、酒店宾馆及公共仓储等领域。货架采用拆卸式多层设计、规格多样，具有极高的使用效率和灵活性，并可进行转角组合，满足不同空间的使用需求。

Multi layer shelves are widely used and widely applicable to various commercial storage spaces. The shelves adopt a detachable multi-layer design, with diverse specifications, high efficiency and flexibility, and can be combined with corners to meet the needs of different spaces.

类目 (Item)	型号/参数Model/Parameters			
宽度系列 (Width Series)	18"/455mm	21"/530mm	24" /610mm	
长度系列 (Length series)	30"/760mm	36"/900mm	42"/1060mm	48"/1220mm
高度系列 (Height series)	54"/1370mm	60"/1520mm	72"/1820mm	
	63"/1600mm	71"/1800mm		
层高调节量 (Layered high volume reduction)	每层具有三档高度可调 /Each layer has three adjustable heights			
层数 (layers Num.)	四层；五层；六层 /4 levels; 5 levels; 6 levels			
承重 (Bearing)	230 kg/layer			

新品系列—不锈钢烤羊炉
New Product Series — Stainless Steel Lamb Roaster-Electric



不锈钢烤羊炉主要用于商用厨房或小型家庭聚餐场所，是利用煤炭或者电力提供的热量烤制肉类的炊具。它除了能烤制全羊，还能烤制羊腿、乳猪、鸡鸭等。具有结构简洁、内部容量大、加热效率高等优点。

The stainless steel lamb roaster is mainly used in commercial kitchens or small family gathering places, and is a cooking utensil that uses the heat provided by coal or electricity to roast meat. It can not only roast whole sheep, but also roast lamb legs, suckling pigs, chickens and ducks, etc. It has the advantages of simple structure, large internal capacity, and high heating efficiency.

类目 (Item)	型号/参数Model/Parameters
外形尺寸 (Dimensions) mm	1310×1250×1970
额定电压、频率 (Rated Voltage/Frequency)	380V、50Hz (Customizable 60Hz)
额定功率 (Rated Power) kW	12
温度范围 (Temperature range) °C	150 ~ 250
水箱容量 (Water consumption) Liter	30
加工量 (Processing Volume)	每次可加工3只净重约15kg的羊羔 Grilled 3 lambs (15kg) each time
作业时间 (Processing Time)	1.5-2 小时/次 1.5-2 hour/each time



JINDU MACHINE



无锡金都机械装备有限公司
WUXI JINDU MACHINE CO., LTD

江苏省无锡市新吴区硕放薛典南路8号 214142
NO.8 SOUTH XUEDIAN ROAD, SHUOFANG TOWN,
XINWU DISTRICT, WUXI CITY, JIANGSU, CHINA



金都餐饮装备（新加坡）有限公司
JINDU F&B EQUIPMENT (SINGAPORE) PTE. LTD.
ADD: 8 Boon Lay Way, #10-06, Tradehub 21
Singapore 609964