



J30F.1.S 系列 - 封闭两侧可打开


Series of J30F.1.S-Enclosed type both side opening

JFLO®



◎ 适用于直径 27 毫米以下线缆 Suitable for 27mm or less of cable.

主要技术参数 Basic technical data

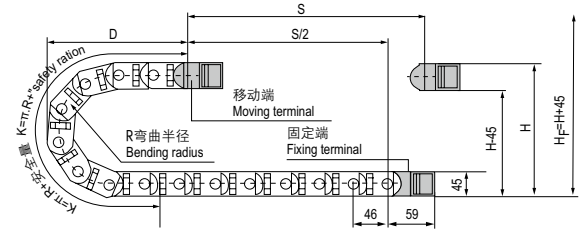


节距=46mm, 每米节数=22, 链长=S/2+K, S=行程距离, K=π.R+ "安全量"
Pitch=46mm, link per meter=22, length of chain=S/2+K, S=stroke. K=π.R+ "safety ration"

R	75	100	125	150
H	195	245	295	345
D	144	169	194	219
K	368	414	506	598

安装实际高度:H_F=H+45mm(负载 5kg/m)

Actual mounting height:H_F=H+45mm(load 5kg/m)

示意图 Drawing

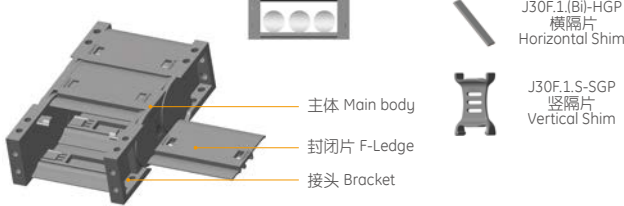


拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters									
							可配接头类型 Applicable bracket type	孔径 Bore diameter Φ1	孔距 (mm)hole distance						接头代号 Bracket No.	
									A	B	C	D	E	F		
J30F.1.38S	30	38	45	54	F.S	75,100 125,150		F-F	5.5	15	50	59	17	13	62	J30F.1.38S-FJT
J30F.1.50S	30	50	45	66	F.S			F-F	5.5	15	62	59	17	13	74	J30F.1.50S-FJT
							X ₂		6.2*10.2L		36	45		11.6	66	J30F.1.50S-XJT
J30F.1.57S	30	57	45	73	F.S			F-F	5.5	15	69	59	17	13	81	J30F.1.57S-FJT
							X ₂		6.2*10.2L		48	45		11.6	73	J30F.1.57S-XJT
J30F.1.60S	30	60	45	76	F.S			F-F	5.5	15	72	59	17	13	84	J30F.1.60S-FJT
								F-F	5.5	15	87	59	17	13	99	J30F.1.75S-FJT
J30F.1.75S	30	75	45	91	F.S			X ₂	6.2*17.7L		40	45		15	91	J30F.1.75S-XJT
J30F.1.77S	30	77	45	93	F.S		F-F	5.5	15	89	59	17	13	101	J30F.1.77S-FJT	
J30F.1.100S	30	100	45	116	F.S		F-F	5.5	15	112	59	17	13	124	J30F.1.100S-FJT	

单位 (unit): mm

注: S 表示两侧可打开 Note: S indicates that the both side open

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

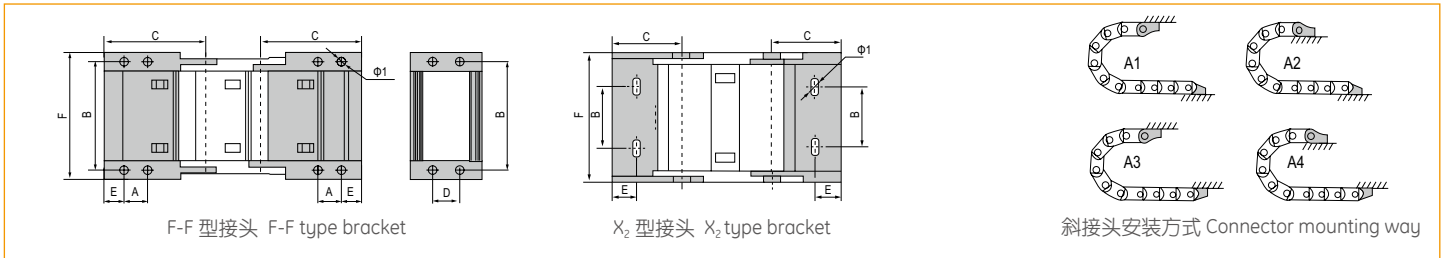

订货示例 Order Example

示例 拖链内高 30mm、内宽 38mm、半径 75mm、长度 1 米 /22 节 (Sample: inner height 30mm, inner width 38mm, radius 75mm, length 22 links/1 meter)

拖链 Chain J30F.1.38S R75 1000mm /22 Links

接头 Bracket J30F.1.38S -FJT 1 副 (Set)

配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.



* 可选导向槽配套 Optional: Guide supporting solution 详见 See P092