



J35F.1.S 系列 - 封闭两侧可打开


Series of J35F.1.S-Enclosed type both side opening

JFLO®



◎ 适用于直径 32 毫米以下线缆 Suitable for 32mm or less of cable.

主要技术参数 Basic technical data

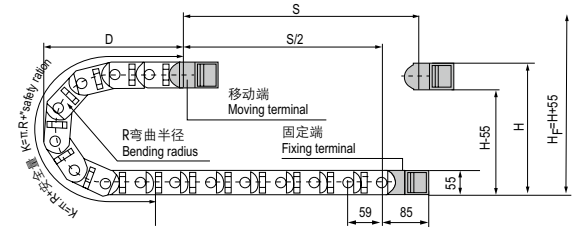


节距=59mm, 每米节数=17, 链长=S/2+K, S=行程距离, K=π.R+"安全量"
Pitch=59mm, link per meter=17, length of chain=S/2+K, S=stroke. K=π.R+"safety ration"

R	75(85)	100	125	150	175	200	250
H	225	255	305	355	405	455	555
D	172	187	212	237	262	287	337
K	413	472	531	590	708	767	944

安装实际高度:H_F=H+55mm(负载 10kg/m)

Actual mounting height:H_F=H+55mm(load 10kg/m)

示意图 Drawing

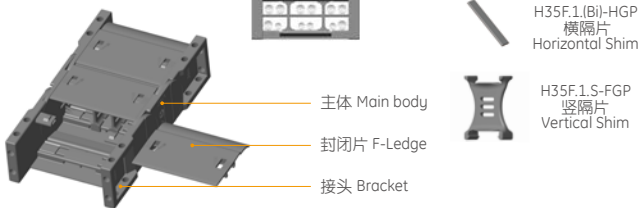


拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters									
							可配接头类型 Applicable bracket type	孔径 Bore diameter Φ1	孔距 (mm)hole distance						接头代号 Bracket No.	
									A	B	C	D	E	F		
J35F.1.50S	35	50	55	70	F.S	R75(实际 R85) 100,125 150,175 200,250		F-F	7.2	24	63.5	85	26	16	75	J35F.1.50S-FJT
J35F.1.75S	35	75	55	95	F.S			F-F	7.2	24	88.5	85	26	16	100	J35F.1.75S-FJT
J35F.1.100S	35	100	55	120	F.S			F-F	7.2	24	113.5	85	26	16	125	J35F.1.100S-FJT
J35F.1.125S	35	125	55	145	F.S			F-F	7.2	24	138.5	85	26	16	150	J35F.1.125S-FJT
J35F.1.150S	35	150	55	170	F.S			F-F	7.2	24	163.5	85	26	16	175	J35F.1.150S-FJT

单位 (unit): mm

注: S 表示两侧可打开, F 表示全封闭 Note: S indicates that the both side open, F indicates that the Enclosed

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

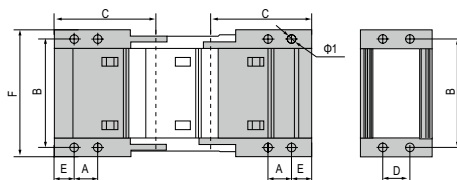

F-F 型接头 F-F type bracket



* 可选导向槽配套 Optional: Guide supporting solution 详见 See P092

订货示例 Order Example

示例 拖链内高 35mm、内宽 50mm、半径 75mm、长度 1 米 /17 节 (Sample: inner height 35mm, inner width 50mm, radius 75mm, length 1 meter)

拖链 Chain J35F.1.50S R75 1000mm /17 Links

接头 Bracket J35F.1.50S -FJT 1 副 (Set)

配件 Accessories 每节装 1 个竖隔片 /1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.