


◎ 适用于直径 32 毫米以下线缆 Suitable for 32mm or less of cable.

主要技术参数 Basic technical data

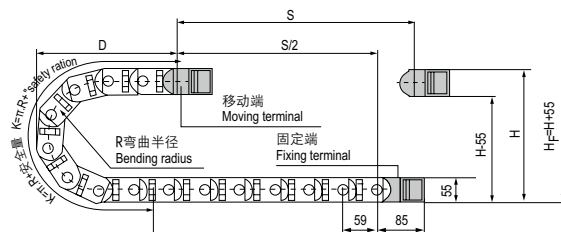

节距=59mm, 每米节数=17, 链长=S/2+K, S=行程距离, K=π.R+“安全量”


Pitch=59mm, link per meter=17, length of chain=S/2+K, S=stroke. K=π.R+“safety ration”

R	75	100	125	150	175	200	250
H	205	255	305	355	405	455	555
D	162	187	212	237	262	287	337
K	354	472	531	590	708	767	944

安装实际高度: $H_f = H + 55\text{mm}$ (负载 10kg/m)

Actual mounting height: $H_f = H + 55\text{mm}$ (load 10kg/m)


示意图 Drawing

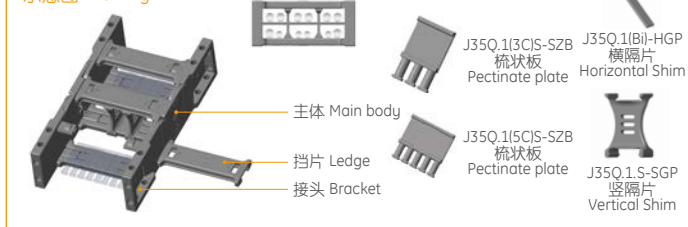

拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters								
							可配接头类型 Applicable bracket type	孔径 Bore diameter Φ1	孔距 (mm)hole distance						接头代号 Bracket No.
									A	B	C	D	E	F	
J35Q.1.50S	35	50	55	70	Q.S	75,100,125, 150,175,200 250	F-Q	7.2	24	63.5	85	26	16	75	J35Q.1.50S-FJT
J35Q.1.60S	35	60	55	80	Q.S		F-Q	7.2	24	73.5	85	26	16	85	J35Q.1.60S-FJT
J35Q.1.75S	35	75	55	95	Q.S		F-Q	7.2	24	88.5	85	26	16	100	J35Q.1.75S-FJT
J35Q.1.90S	35	90	55	110	Q.S		F-Q	7.2	24	103.5	85	26	16	115	J35Q.1.90S-FJT
J35Q.1.100S	35	100	55	120	Q.S		F-Q	7.2	24	113.5	85	26	16	125	J35Q.1.100S-FJT
J35Q.1.117S	35	117	55	137	Q.S		F-Q	7.2	24	130.5	85	26	16	142	J35Q.1.117S-FJT
J35Q.1.125S	35	125	55	145	Q.S		F-Q	7.2	24	138.5	85	26	16	150	J35Q.1.125S-FJT
J35Q.1.130S	35	130	55	150	Q.S		F-Q	7.2	24	143.5	85	26	16	155	J35Q.1.130S-FJT
J35Q.1.150S	35	150	55	170	Q.S		F-Q	7.2	24	163.5	85	26	16	175	J35Q.1.150S-FJT
J35Q.1.154S	35	154	55	174	Q.S		F-Q	7.2	24	167.5	85	26	16	179	J35Q.1.154S-FJT
J35Q.1.175S	35	175	55	195	Q.S		F-Q	7.2	24	188.5	85	26	16	200	J35Q.1.175S-FJT
J35Q.1.200S	35	200	55	220	Q.S		F-Q	7.2	24	213.5	85	26	16	225	J35Q.1.200S-FJT
J35Q.1.250S	35	250	55	270	Q.S		F-Q	7.2	24	263.5	85	26	16	275	J35Q.1.250S-FJT
J35Q.1.300S	35	300	55	320	Q.S		F-Q	7.2	24	313.5	85	26	16	325	J35Q.1.300S-FJT

注: S 表示两侧可打开 Note: S indicates that the both side open

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

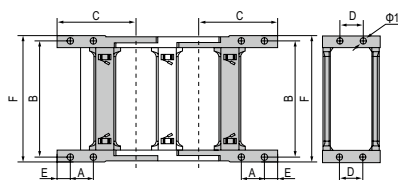

F-Q 型接头 F-Q type bracket

订货示例 Order Example

示例 拖链内高 35mm、内宽 50mm、半径 75mm、长度 1 米 /17 节 (Sample: inner height 35mm, inner width 50mm, radius 75mm, length 1 meter /17 links)

拖链 Chain J35Q.1.50S R75 1000mm /17 Links

接头 Bracket J35Q.1.50S-FJT 1 副 (Set)

配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.



* 可选导向槽配套 Optional: Guide supporting solution 详见 See P092