



JE15Q.1.F 系列 - 桥式方便型 (内侧开口)


Series of JE15Q.1.F Bridge type Convenient type (Inner Open)

JFLO®



◎ 适用于直径 12 毫米以下线缆 Suitable for 12mm or less of cable.

主要技术参数 Basic technical data

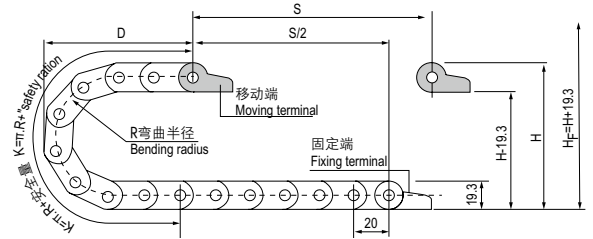


节距=20mm, 每米节数=50, 链长=S/2+K, S=行程距离, K=π.R+“安全量”
Pitch=20mm, link per meter=50, length of chain=S/2+K, S=stroke. K= π .R+“safety ration”

R	28	38	48
H	75	95	115
D	58	68	78
K	140	160	200

安装实际高度 :H_f=H+19.3mm(负载 0.1kg/m)

Actual mounting height:H_f=H+19.3mm(load 0.1kg/m)

示意图 Drawing

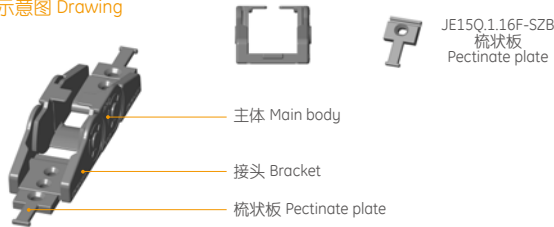


拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters									
							可配接头类型 Applicable bracket type		孔径 Bore diameter Φ1	孔距 (mm)hole distance						接头代号 Bracket No.
										A	B	C	D	E	F	
JE15Q.1.16F	14.7	16.2	19.3	24.2	方便型 内侧开口	28.38.48	X ₁	3.2	8		28		5	24.2	JE15Q.1.16F-XJT	
JE15Q.1.20F	14.7	20.2	19.3	28.2	方便型 内侧开口		X ₁	3.2	8		28		5	28.2	JE15Q.1.20F-XJT	
JE15Q.1.30F	14.7	30.2	19.3	38.2	方便型 内侧开口		X ₃	3.2	8	22	28		5	38.2	JE15Q.1.30F-XJT*	
JE15Q.1.40F	14.7	40.2	19.3	48.2	方便型 内侧开口		X ₃	3.2	8	32	28		5	48.2	JE15Q.1.40F-XJT*	


注：F 表示方便型 Note: F indicates that the Convenient type

单位 (unit): mm


固定接头类型及参数 Fix bracket type and parameters (见表格 See table)



X₁ 型接头 X₁ type bracket



X₃ 型接头 X₃ type bracket



斜接头安装方式 Connector mounting way

* 可选: 带梳状板接头 例: JE15Q.1.16F-XJTS

* Optional: Bracket with Pectinate plate Example: JE15Q.1.16F-XJTS

订货示例 Order Example

示例 拖链内高 14.7mm、内宽 16.2mm、半径 28mm、长度 1 米 /50 节 (Sample: inner height 14.7mm, inner width 16.2mm, radius 28mm, length 50 links/1 meter)

拖链 Chain JE15Q.1.16F R28 1000mm /50 Links

接头 Bracket JE15Q.1.16F-XJT 1 副 (Set)

配件 Accessories

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.



* 可选导向槽配套 Optional: Guide supporting solution 详见 See P092