



JEZ35Q.2.S 系列 - 桥式双侧打开


Series of JEZ35Q.2.S-Bridge type open of both side

JFLO®

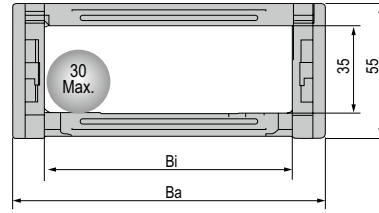

◎ 适用于直径 30 毫米以下线缆 Suitable for 30mm or less of cable.

主要技术参数 Basic technical data

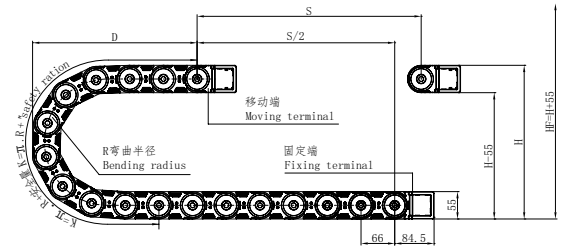


节距=66mm, 每米节数=15, 链长=S/2+K, S=行程距离, K=π·R+“安全量”
Pitch=66mm, link per meter=15, length of chain=S/2+K, S=stroke. K=π·R+“safety ration”

R	75	100	125	150	175	200	300
H	205	255	305	355	405	455	655
D	169	194	219	244	269	294	394
K	396	462	528	660	726	792	1122

安装实际高度:H_F=H+55mm(负载 15kg/m)

Actual mounting height:H_F=H+55mm(load 15kg/m)

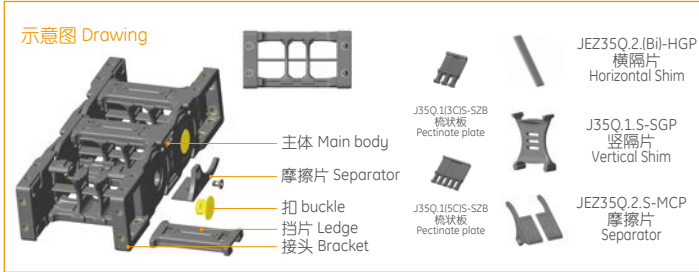


拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters								
							可配接头类型 Applicable bracket type	孔径 Bore diameter Φ1	孔距 (mm)hole distance						接头代号 Bracket No.
									A	B	C	D	E	F	
JEZ35Q.2.50S	35	50	55	73.2	Q.S	75.100.125. 150.175.200. 300	F-Q	6	24	66	84.5	26	16	78	JEZ35Q.2.50S-FJT
JEZ35Q.2.60S	35	60	55	83.2	Q.S		F-Q	6	24	76	84.5	26	16	88	JEZ35Q.2.60S-FJT
JEZ35Q.2.75S	35	75	55	98.2	Q.S		F-Q	6	24	91	84.5	26	16	103	JEZ35Q.2.75S-FJT
JEZ35Q.2.90S	35	90	55	113.2	Q.S		F-Q	6	24	106	84.5	26	16	118	JEZ35Q.2.90S-FJT
JEZ35Q.2.100S	35	100	55	123.2	Q.S		F-Q	6	24	116	84.5	26	16	128	JEZ35Q.2.100S-FJT
JEZ35Q.2.117S	35	117	55	140.2	Q.S		F-Q	6	24	133	84.5	26	16	145	JEZ35Q.2.117S-FJT
JEZ35Q.2.125S	35	125	55	148.2	Q.S		F-Q	6	24	141	84.5	26	16	153	JEZ35Q.2.125S-FJT
JEZ35Q.2.130S	35	130	55	153.2	Q.S		F-Q	6	24	146	84.5	26	16	158	JEZ35Q.2.130S-FJT
JEZ35Q.2.150S	35	150	55	173.2	Q.S		F-Q	6	24	166	84.5	26	16	178	JEZ35Q.2.150S-FJT
JEZ35Q.2.154S	35	154	55	177.2	Q.S		F-Q	6	24	170	84.5	26	16	182	JEZ35Q.2.154S-FJT
JEZ35Q.2.175S	35	175	55	198.2	Q.S		F-Q	6	24	191	84.5	26	16	203	JEZ35Q.2.175S-FJT
JEZ35Q.2.200S	35	200	55	223.2	Q.S		F-Q	6	24	216	84.5	26	16	228	JEZ35Q.2.200S-FJT
JEZ35Q.2.250S	35	250	55	273.2	Q.S		F-Q	6	24	266	84.5	26	16	278	JEZ35Q.2.250S-FJT
JEZ35Q.2.300S	35	300	55	323.2	Q.S		F-Q	6	24	316	84.5	26	16	328	JEZ35Q.2.300S-FJT


注: Q.S 表示桥式两侧可打开, F-Q 表示: 桥式方型接头, 不同序号表示安装孔的不同排列样式

Note: Q.S Bridge type open of both side, F-Q: bridge type square bracket, Different serial number indicates the difference rank type of fixing holes

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

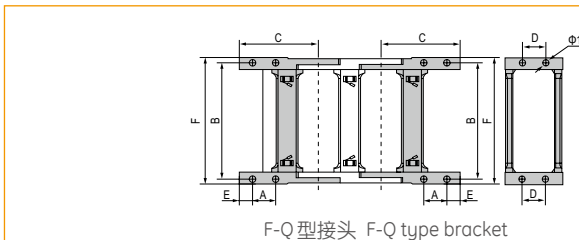

* 可选导向槽配套 Optional: Guide supporting solution



详见 P092
See P092

订货示例 Order Example

示例 拖链内高 35mm、内宽 50mm、半径 75mm、长度 1 米 /15 节 (Sample: inner height 35mm, inner width 50mm, radius 75mm, length 15 links/1 meter)

拖链 Chain JEZ35Q.2.50S R75 1000mm/15 Links (实际长度 Physical length: ± 2mm)

接头 Bracket JEZ35Q.2.50S-FJT 1 副 (Set)

配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)