



JEZ45Q.2.S 系列 - 桥式双侧打开


Series of JEZ45Q.2.S-Bridge type open of both side

JFLO®

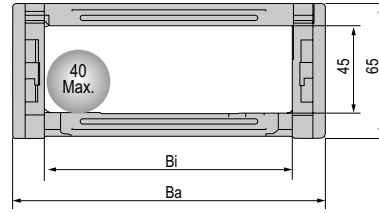

◎ 适用于直径 40 毫米以下线缆 Suitable for 40mm or less of cable.

主要技术参数 Basic technical data

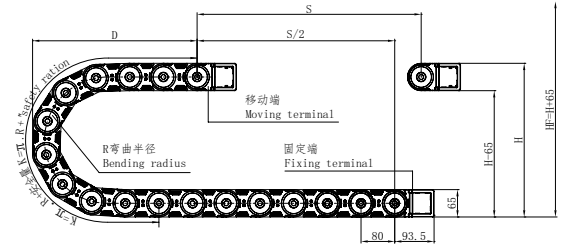


节距=80mm, 每米节数=13, 链长=S/2+K, S=行程距离, K=π.R+ "安全量"
Pitch=80mm, link per meter=13, length of chain=S/2+K, S=stroke, K=π.R+ "safety ration"

R	75	100	125	150	200	250	300
H	215	265	315	365	465	565	665
D	188	213	238	263	313	363	413
K	400	480	560	640	800	960	1120

安装实际高度: H_F=H+65mm(负载 28kg/m)

Actual mounting height: H_F=H+65mm(load 28kg/m)

示意图 Drawing


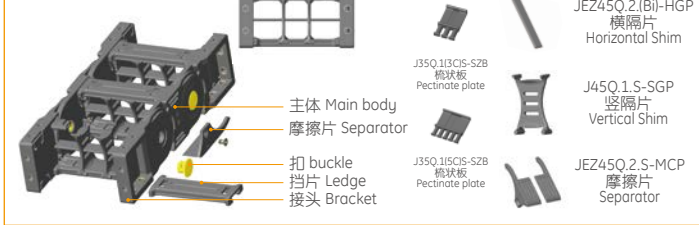


拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters								
							可配接头类型 Applicable bracket type	孔径 Bore diameter Φ1	孔距 (mm)hole distance						接头代号 Bracket No.
									A	B	C	D	E	F	
JEZ45Q.2.50S	45	50	65	76.2	Q.S	75.100.125. 150.200.250. 300	F-Q	6	23.5	68	93.5	25.5	16	83.5	JEZ45Q.2.50S-FJT
JEZ45Q.2.60S	45	60	65	86.2	Q.S		F-Q	6	23.5	78	93.5	25.5	16	93.5	JEZ45Q.2.60S-FJT
JEZ45Q.2.75S	45	75	65	101.2	Q.S		F-Q	6	23.5	93	93.5	25.5	16	108.5	JEZ45Q.2.75S-FJT
JEZ45Q.2.90S	45	90	65	116.2	Q.S		F-Q	6	23.5	108	93.5	25.5	16	123.5	JEZ45Q.2.90S-FJT
JEZ45Q.2.100S	45	100	65	126.2	Q.S		F-Q	6	23.5	118	93.5	25.5	16	133.5	JEZ45Q.2.100S-FJT
JEZ45Q.2.117S	45	117	65	143.2	Q.S		F-Q	6	23.5	135	93.5	25.5	16	150.5	JEZ45Q.2.117S-FJT
JEZ45Q.2.125S	45	125	65	151.2	Q.S		F-Q	6	23.5	143	93.5	25.5	16	158.5	JEZ45Q.2.125S-FJT
JEZ45Q.2.130S	45	130	65	156.2	Q.S		F-Q	6	23.5	148	93.5	25.5	16	163.5	JEZ45Q.2.130S-FJT
JEZ45Q.2.150S	45	150	65	176.2	Q.S		F-Q	6	23.5	168	93.5	25.5	16	183.5	JEZ45Q.2.150S-FJT
JEZ45Q.2.154S	45	154	65	180.2	Q.S		F-Q	6	23.5	172	93.5	25.5	16	187.5	JEZ45Q.2.154S-FJT
JEZ45Q.2.175S	45	175	65	201.2	Q.S		F-Q	6	23.5	193	93.5	25.5	16	208.5	JEZ45Q.2.175S-FJT
JEZ45Q.2.200S	45	200	65	226.2	Q.S		F-Q	6	23.5	218	93.5	25.5	16	233.5	JEZ45Q.2.200S-FJT
JEZ45Q.2.250S	45	250	65	276.2	Q.S		F-Q	6	23.5	268	93.5	25.5	16	283.5	JEZ45Q.2.250S-FJT
JEZ45Q.2.300S	45	300	65	326.2	Q.S		F-Q	6	23.5	318	93.5	25.5	16	333.5	JEZ45Q.2.300S-FJT

注: Q.S 表示桥式两侧可打开, F-Q 表示: 桥式方型接头, 不同序号表示安装孔的不同排列样式

Note: Q.S Bridge type open of both side, F-Q: bridge type square bracket, Different serial number indicates the difference rank type of fixing holes

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

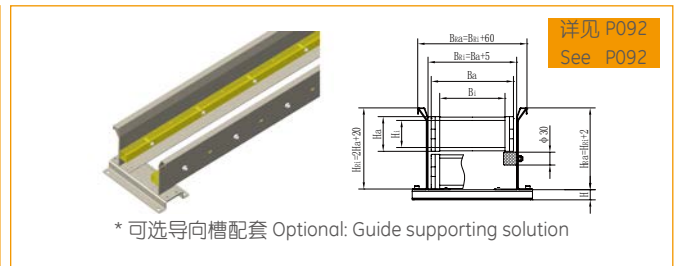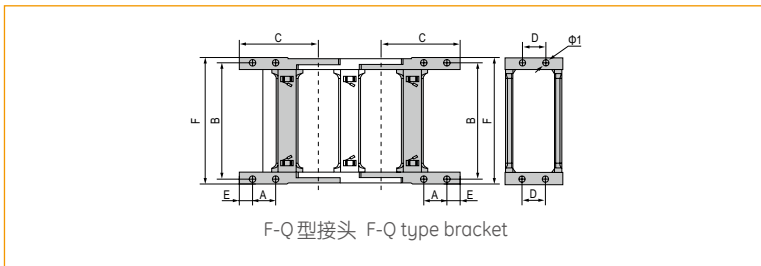

订货示例 Order Example

示例 拖链内高 45mm、内宽 50mm、半径 75mm、长度 1 米 /13 节 (Sample: inner height 45mm, inner width 50mm, radius 75mm, length 13 links/1 meter)

拖链 Chain JEZ45Q.2.50S R75 1000mm/13 Links (实际长度 Physical length: ± 2mm)

接头 Bracket JEZ45Q.2.50S-FJT 1 副 (Set)

配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)