




JN10Q.1.W 系列 - 桥式外侧开

Series of JN10Q.1.W-Bridge type exterior opening

JFLO®




示意图 Drawing

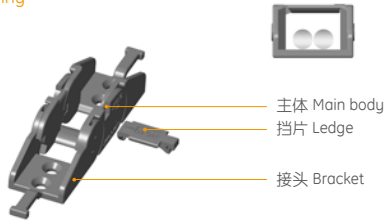

◎ 适用于直径 9 毫米以下线缆 Suitable for 9mm or less of cable.

主要技术参数 Basic technical data

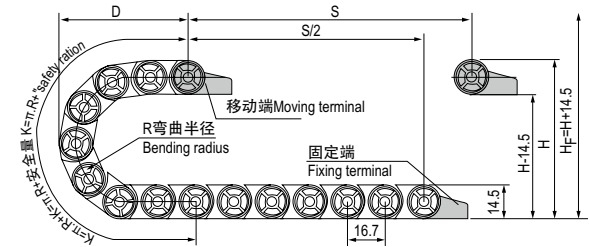

节距=16.7mm, 每米节数=60, 链长=S/2+K, S=行程距离, K=π.R+“安全量”
Pitch=16.7mm, link per meter=60, length of chain=S/2+K, S=stroke, K=π.R+“safety ration”

R	18	28	38	48
H	50.5	70.5	90.5	110.5
D	43	53	63	73
K	90	120	150	180

安装实际高度:H_f=H+14.5mm(负载 0.2kg/m)

Actual mounting height:H_f=H+14.5mm(load 0.2kg/m)


拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters									
							可配接头类型 Applicable bracket type		孔径 Bore diameter Φ1	孔距 (mm)hole distance						接头代号 Bracket No.
										A	B	C	D	E	F	
JN10Q.1.10W	10	10	14.5	17.5	Q.W	18,28,38,48	X ₁		3.2	8		22		4	17.5	JN10Q.1.10W-XJTS*
JN10Q.1.15W	10	15	14.5	22.5	Q.W		X ₁		3.2	8		22		4	22.5	JN10Q.1.15W-XJTS*
JN10Q.1.20W	10	20	14.5	27.5	Q.W		X ₁		3.2	8		22		4	27.5	JN10Q.1.20W-XJTS*
JN10Q.1.30W	10	30	14.5	37.5	Q.W		X ₃		3.2	8	22	22		4	37.5	JN10Q.1.30W-XJTS*

单位 (unit): mm

注: Q.W 表示桥式外侧开, X 表示: 斜型接头, 不同序号表示安装孔的不同排列样式

Note: Q.W Bridge type exterior opening, X: oblique bracket, Different serial number indicates the difference rank type of fixing holes

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

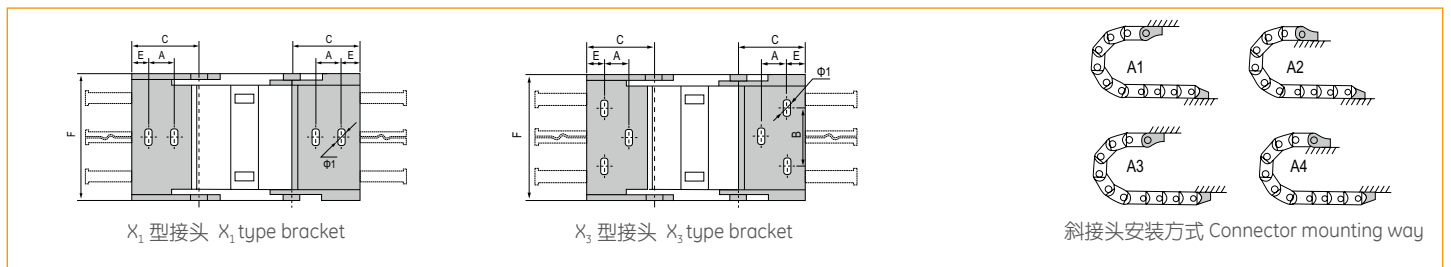

* 可选: 不带梳状板接头 例: JN10Q.1.10W-XJT

* Optional: Bracket without Pectinate plate Example: JN10Q.1.10W-XJT

订货示例 Order Example

示例 拖链内高 10mm、内宽 10mm、半径 18mm、长度 0.5 米 /30 节 (Sample: inner height 10mm, inner width 10mm, radius 18mm, length 30 links/0.5 meter)

拖链 Chain JN10Q.1.10W R18 500mm /30 Links (实际长度 Physical length: ±2mm)

接头 Bracket JN10Q.1.10W-XJTS* 1 副 (Set)

配件 Accessories