



# JN15Q.1.W 系列 - 桥式外侧开


## Series of JN15Q.1.W-Bridge type exterior opening

**JFLO®**



◎ 适用于直径 13 毫米以下线缆 Suitable for 13mm or less of cable.

### 主要技术参数 Basic technical data

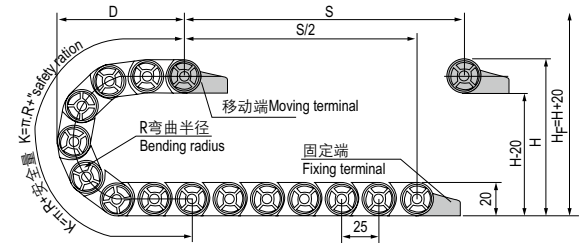


节距=25mm, 每米节数=40, 链长=S/2+K, S=行程距离, K=π.R+"安全量"  
Pitch=25mm, link per meter=40, length of chain=S/2+K, S=stroke. K=π.R+"safety ration"

|   |     |     |     |
|---|-----|-----|-----|
| R | 28  | 38  | 48  |
| H | 76  | 96  | 116 |
| D | 63  | 73  | 83  |
| K | 150 | 175 | 225 |

安装实际高度:H<sub>F</sub>=H+20mm(负载 0.75kg/m)

Actual mounting height:H<sub>F</sub>=H+20mm(load 0.75kg/m)

### 示意图 Drawing



J15.1.20-SZB  
梳状板  
Pectinate plate


| 拖链型号<br>Cable Chain<br>No. | 内高<br>Hi | 内宽<br>Bi | 外高<br>Ha | 外宽<br>Ba | 款式<br>Styles | 弯曲半径<br>Bending<br>radius<br>R | 固定接头类型及参数 Bracket type and parameters |                           |                      |    |    |  |   |    |                     |
|----------------------------|----------|----------|----------|----------|--------------|--------------------------------|---------------------------------------|---------------------------|----------------------|----|----|--|---|----|---------------------|
|                            |          |          |          |          |              |                                | 可配接头类型<br>Applicable<br>bracket type  | 孔径<br>Bore diameter<br>Φ1 | 孔距 (mm)hole distance |    |    |  |   |    | 接头代号<br>Bracket No. |
| JN15Q.1.15W                | 15       | 15       | 20       | 25       | Q.W          | 28,38,48                       | X <sub>1</sub>                        | 3.2*4.2L                  | 8                    |    | 32 |  | 7 | 25 | JN15Q.1.15W-XJT     |
| JN15Q.1.20W                | 15       | 20       | 20       | 30       | Q.W          |                                | X <sub>1</sub>                        | 3.2*4.2L                  | 8                    |    | 32 |  | 7 | 30 | JN15Q.1.20W-XJT     |
| JN15Q.1.30W                | 15       | 30       | 20       | 40       | Q.W          |                                | X <sub>2</sub>                        | 4.2*5.2L                  |                      | 15 | 32 |  | 7 | 40 | JN15Q.1.30W-XJT     |
| JN15Q.1.40W                | 15       | 40       | 20       | 50       | Q.W          |                                | X <sub>3</sub>                        | 3.2*4.2L                  | 8                    | 32 | 32 |  | 7 | 50 | JN15Q.1.40W-XJT     |
| JN15Q.1.50W                | 15       | 50       | 20       | 60       | Q.W          |                                | X <sub>3</sub>                        | 3.2*4.2L                  | 8                    | 42 | 32 |  | 7 | 60 | JN15Q.1.50W-XJT     |

注: Q.W 表示桥式外侧开, X 表示: 斜型接头, 不同序号表示安装孔的不同排列样式


Note: Q.W Bridge type exterior opening, X: oblique bracket, Different serial number indicates the difference rank type of fixing holes

单位 (unit): mm


### 固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

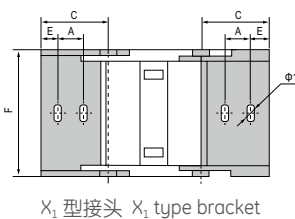


X<sub>1</sub> 型接头 X<sub>1</sub> type bracket

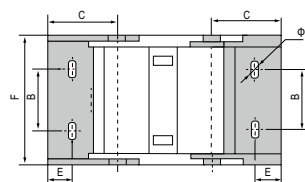

X<sub>2</sub> 型接头 X<sub>2</sub> type bracket



X<sub>3</sub> 型接头 X<sub>3</sub> type bracket

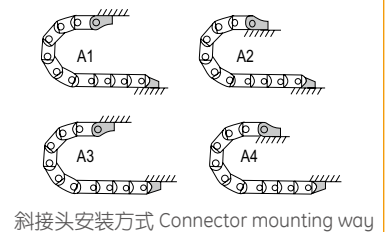

斜接头安装方式 Connector mounting way

### 订货示例 Order Example

示例 拖链内高 15mm、内宽 15mm、半径 28mm、长度 0.5 米 /20 节 (Sample: inner height 15mm, inner width 15mm, radius 28mm, length 20 links/0.5 meter)

拖链 Chain JN15Q.1.15W R28 500mm /20 Links (实际长度 Physical length: ±2mm)

接头 Bracket JN15Q.1.15W-XJT 1 副 (Set)

配件 Accessories