



JN65F.1.W 系列 - 封闭外侧开


Series of JN65F.1.W-Enclosed type exterior opening

JFLO®



◎ 适用于直径 60 毫米以下线缆 Suitable for 60mm or less of cable.

主要技术参数 Basic technical data

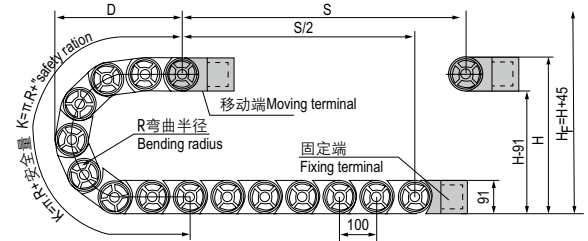


节距=100mm, 每米节数=10, 链长=S/2+K, S=行程距离, K=π.R+"安全量"
Pitch=100mm, link per meter=10, length of chain=S/2+K, S=stroke. K=π.R+"safety ration"

R	150	175	200	250	300	350
H	391	441	491	591	691	791
D	296	321	346	396	446	496
K	700	800	900	1000	1200	1300

安装实际高度 :H_F=H+45mm(负载 40kg/m)

Actual mounting height:H_F=H+45mm(load 40kg/m)

示意图 Drawing

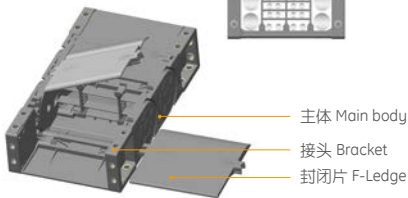

JN65F.1(B)-HGP
横隔片
Horizontal Shim
JN65F.1(S)-SGP
竖隔片
Vertical Shim


拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters									
							可配接头类型 Applicable bracket type	孔径 Bore diameter Φ1	孔距 (mm)hole distance						接头代号 Bracket No.	
									A	B	C	D	E	F		
JN65F.1.100W	65	100	91	140	F.W	150,175,200 250,300,350		F-F	9	35	122	135	45	20	144	JN65F.1.100W-FJT
JN65F.1.125W	65	125	91	165	F.W			F-F	9	35	147	135	45	20	169	JN65F.1.125W-FJT
JN65F.1.150W	65	150	91	190	F.W			F-F	9	35	172	135	45	20	194	JN65F.1.150W-FJT
JN65F.1.175W	65	175	91	215	F.W			F-F	9	35	197	135	45	20	219	JN65F.1.175W-FJT
JN65F.1.200W	65	200	91	240	F.W			F-F	9	35	222	135	45	20	244	JN65F.1.200W-FJT
JN65F.1.250W	65	250	91	290	F.W			F-F	9	35	272	135	45	20	294	JN65F.1.250W-FJT

注: F.W 表示封闭外侧开, F-F 表示: 封闭方型接头, 不同序号表示安装孔的不同排列样式

Note: F.W Enclosed type exterior opening, F-F: enclosed type bracket, Different serial number indicates the difference rank type of fixing holes

单位 (unit): mm

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

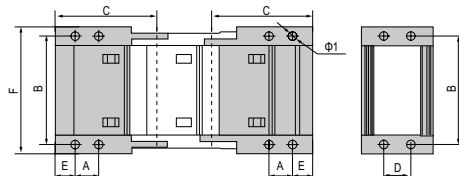

F-F 型接头 F-F type bracket



* 可选导向槽配套 Optional: Guide supporting solution 详见 See P092

订货示例 Order Example

示例 拖链内高 65mm、内宽 100mm、半径 125mm、长度 1 米 /10 节 (Sample: inner height 65mm, inner width 100mm, radius 125mm, length 10 links/1 meter)

拖链 chain JN65F.1.100W R125 1000mm /10 Links (实际长度 Physical length: ± 2mm)

接头 Connector JN65F.1.100W-FJT 1 副 (Set)

配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)