


◎ 适用于直径 56 毫米以下线缆 Suitable for 56mm or less of cable.


主要技术参数 Basic technical data

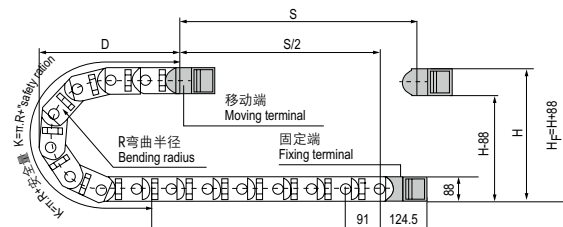



节距=91mm, 每米节数=11, ; 链长=S/2+K, S=行程距离, K=π.R+"安全量"
Pitch=91mm, link per meter=11, length of chain=S/2+K, S=stroke. K=π.R+"safety ration"+1 Pitch

R	135	150	175	200	250	300	350	400	500
H	358	388	438	488	588	688	788	888	1088
D	270	285	310	335	385	435	485	535	635
K	637	728	819	910	1001	1183	1365	1456	1820

示意图 Drawing

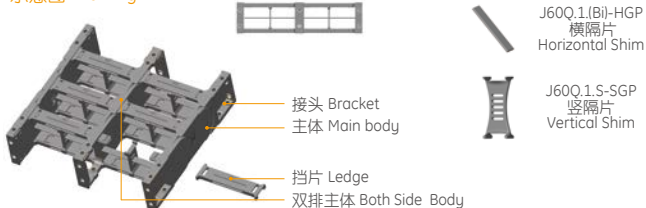

尺寸图 Dimension drawing

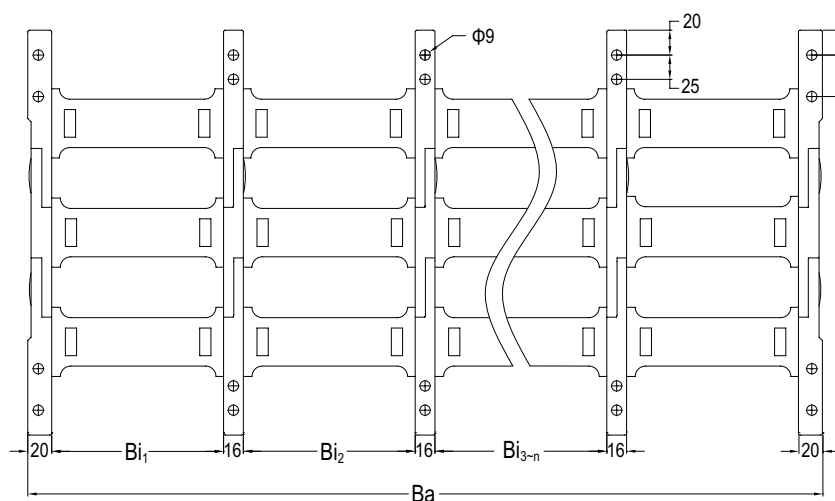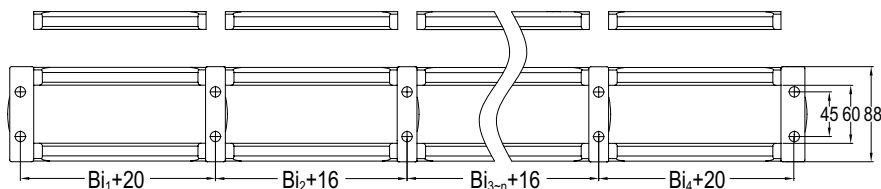

系列号 Series No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	弯曲半径 Bending radius R
JT60Q.1.S	60	75 100 125 150 175 200 250 300 350	88	Ba = 40+ (Bi1+Bi2+Bi3 +...+Bi n) + (n-1) *16	135 150 175 200 250 300 350 400 500

注：桥式拖链与封闭式拖链可混合安装分隔片参照附录一