

Product Specifications

- Signal bandwidth: 5150-5350MHz
- Output power: 47dBm
- Working voltage: 28V
- Power flatness: <1dB
- Upper sideband drift: <10MHz
- Lower sideband drift: <10MHz

Product Application

- WiFi、5150-5350MHz wireless signal shielding


Product Description

YJM5250B is a wireless signal shielding module dedicated to 5150-5350MHz signal. This module has the advantages of high average output power, good in band flatness, small upper and lower sideband offset and so on.

Product Display



Product Dimensions

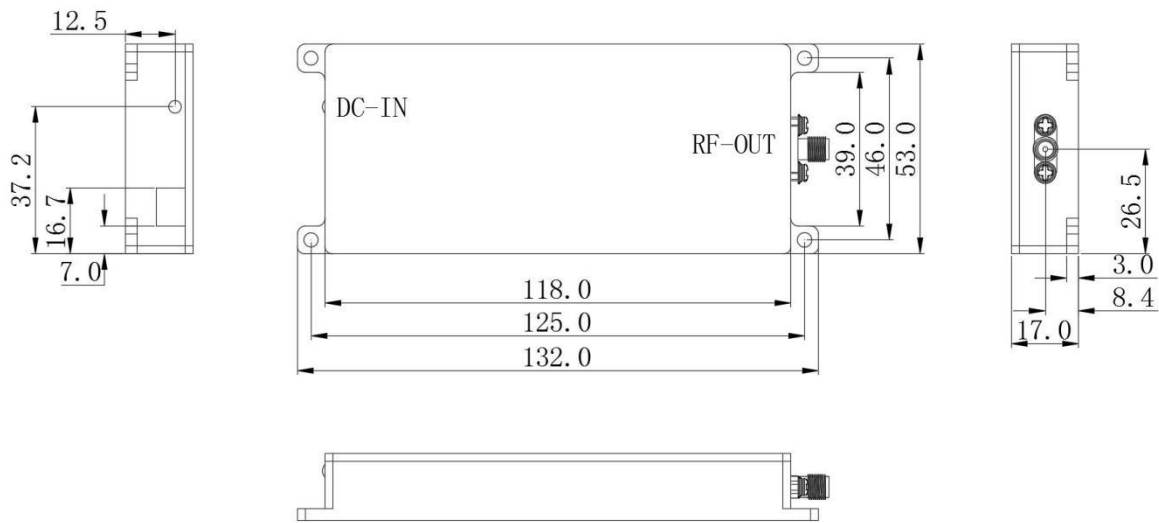

Working Conditions

Parameters	Value	Unit	Parameters	Value	Unit
Working voltage	28	V	Storage temperature	-40 ~ +150	°C
Working temperature	-30 ~ +70	°C	Relative humidity	<80%	RH

Electrical Characteristics

Parameters	Characteristics			Unit	Conditions
	Min	Typ	Max		
Test conditions					DC=28V,T=25°C
Signal bandwidth	5150		5350	MHz	
Output power	47	47.5	48	dBm	
Power flatness		1		dB	
Working current		4.5		A	