

SRE




- 耐高纹波,小尺寸,105°C 2000小时.
High ripple current ,Smaller size,Load life of 2000 hours at 105°C.
- 适用于开关电源, 变频器
Best for switching power supplies, Inverter.
- ROHS指令已对应完毕。
Adapted to the ROHS directive

主要技术性能 Specifications

项目 Items	特性 Characteristics							
使用温度范围 Operating Temperature Range	-40℃ ~ +105℃				-25℃ ~ +105℃			
额定电压范围 Rated Voltage Range	16 ~ 100 V				160 ~ 450V			
标称电容量允许偏差 Capacitance Tolerance	±20% (+20℃ , 120Hz)							
漏电流 Leakage Current	I ≤0.01CV(μA)或1.5mA 取较小值 (Whichever is smaller) 5分钟(at 20℃,after 5 minutes)							
损耗角正切值(tgδ) Dissipation Factor (+20℃, 120Hz)	U _r (V)	16	25	35	50	63~100	160~250	350~450
	tgδ	0.50	0.40	0.35	0.30	0.20	0.15	0.20
温度特性 Temperature Characteristics (Impedance ratio at 120Hz)	U _r (V)	16~100	160~250	400~450				
	Z-25℃ / Z+20℃	4	4	8				
	Z-40℃ / Z+20℃	15						
耐久性 Load Life	+105℃施加含额定纹波电流的额定电压2000小时，恢复16小时后： After applying rated voltage with specified ripple current for 2000 hours at +105℃ and then resumed for 16 hours: 电容量变化率 Capacitance change : ±20%初始测量值以内 ±20% of the initial measured value 漏 电 流 Leakage current : ≤初始规定值 ≤Initial specified value 损耗角正切值 Dissipation factor : ≤2倍初始规定值 ≤2 times of the initial specified value							
高温贮存 Shelf Life	+105℃，1000小时贮存后，加额定工作电压处理30分钟，恢复16小时后： After storage for 1000 hours at +105℃, U _r to be applied for 30 minutes and then resumed for 16 hours: 电容量变化率 Capacitance change : ±20%初始测量值以内 ±20% of the initial measured value 漏 电 流 Leakage current : ≤初始规定值 ≤Initial specified value 损耗角正切值 Dissipation factor : ≤2倍初始规定值 ≤2 times of the initial specified value							

外形图 Case Table

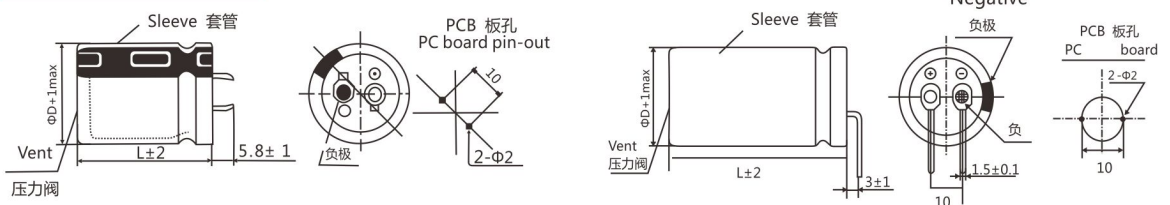

频率修正系数 Frequency Coefficient

电压 U(V)	频率 Freq.(Hz)	50	120	1K	10K	≥50K
10~100		0.90	1.00	1.15	1.25	1.35
160~450		0.80	1.00	1.30	1.41	1.43

尺寸 Dimensions

额定容量 CAR(μF)		额定电压 WV		16(1C)								25(1E)							
				Φ22		Φ25		Φ30		Φ35		Φ22		Φ25		Φ30		Φ35	
				尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple
4700	472											22×25	2.00						
5600	562											22×30	2.20						
6800	682	22×25	2.20									22×30	2.40	25×25	2.40				
8200	822	22×30	2.40									22×35	2.70	25×30	2.70	30×25	2.70		
10000	103	22×30	2.60	25×25	2.60							22×40	3.00	25×35	3.00	30×30	3.00		
12000	123	22×35	2.90	25×30	2.90	30×25	2.90					22×50	3.20	25×40	3.20	30×30	3.20		
15000	153	22×40	3.20	25×35	3.20	30×30	3.20							25×45	3.60	30×35	3.60	35×30	3.60
18000	183	22×45	3.50	25×40	3.50	30×30	3.50									30×40	3.60	35×35	3.90
22000	223			25×45	3.80	30×35	3.80	35×30	3.80							30×45	4.30	35×35	4.30
27000	273			25×50	4.20	30×40	4.20	35×30	4.20									35×45	4.80
33000	333							30×45	4.70	35×35	4.70								
39000	393							30×50	5.10	35×40	5.10								
47000	473									35×45	5.50								

额定容量 CAR(μF)		额定电压 WV		35(1V)								50(1H)							
				Φ22		Φ25		Φ30		Φ35		Φ22		Φ25		Φ30		Φ35	
				尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple
1800	182											22×25	1.50						
2200	222											22×30	1.70						
2700	272											22×30	1.80	25×25	1.80				
3300	332	22×25	1.90									22×35	2.00	25×30	2.00	30×25	2.70		
3900	392	22×30	2.00									22×40	2.30	25×30	2.20	30×25	2.20		
4700	472	22×35	2.20	25×25	2.20							22×45	2.60	25×35	2.40	30×30	2.50		
5600	562	22×35	2.40	25×30	2.40	30×25	2.60					22×50	2.80	25×40	2.80	30×30	2.75		
6800	680	22×40	2.60	25×35	2.60	30×25	2.75							25×45	3.30	30×35	3.30	35×30	3.30
8200	822	22×50	2.90	25×40	2.90	30×30	2.90									30×40	3.70	35×35	3.85
10000	103			25×45	3.20	30×35	3.20									30×45	4.30	35×40	4.50
12000	123			25×50	3.50	30×40	3.50	35×30	3.50									35×45	4.50
15000	153					30×45	3.90	35×35	3.90										
18000	183							35×40	4.50										
22000	223							35×45	5.25										

额定容量 CAR(μF)		额定电压 WV		63(1J)								80(1K)							
				Φ22		Φ25		Φ30		Φ35		Φ22		Φ25		Φ30		Φ35	
				尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple
820	821											22×25	1.11						
1200	122	22×25	1.40									22×30	1.39	25×25	1.39				
1500	152	22×30	1.50									22×35	1.61	25×30	1.62				
1800	182	22×30	1.70	25×25	1.70							22×40	1.83	25×30	1.82	30×25	1.81		
2200	222	22×30	1.85	25×30	2.00							22×45	2.09	25×35	2.01	30×30	2.10		
2700	272	22×40	2.20	25×35	2.20	30×30	2.20					22×45	2.40	25×40	2.38	30×35	2.35	35×30	2.35
3300	332	22×45	2.60	25×35	2.40	30×30	2.50							25×45	2.60	30×35	2.60	35×30	2.60
3900	392			25×40	2.55	30×35	2.70							25×50	2.90	30×40	2.80	35×30	2.95
4700	472			25×50	3.00	30×40	3.00	35×30	3.00							30×45	3.34	35×35	3.38
5600	562					30×40	3.20	35×35	3.30							30×50	3.80	35×40	3.80
6800	682					30×50	3.85	35×40	3.85									35×45	3.90
8200	822							35×45	4.40										
10000	103							35×40	4.70										
								35×50	5.10										

尺寸Size φD×L(mm)

最大允许纹波电流Maximum Allowable Ripple Current (A rms) at 105°C 120Hz

尺寸 Dimensions

额定电压 WV 尺寸 Size 额定容量 CAR(μF)		100(2A)								160(2C)							
		Φ22		Φ25		Φ30		Φ35		Φ22		Φ25		Φ30		Φ35	
		尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple
270	271									22×25	0.85						
330	331									22×30	1.10						
390	391									22×30	1.22						
470	471									22×30	1.35	25×25	1.35				
560	561									22×35	1.67	25×30	1.67				
680	681	22×25	1.00							22×40	1.82	25×35	1.85	30×25	1.82		
820	821	22×30	1.40							22×45	2.04	25×35	2.04	30×30	2.04		
1000	102	22×30	1.45	25×25	1.45							25×45	2.40	30×35	2.25		
1200	122	22×35	1.70	25×30	1.70							25×50	2.62	30×40	2.49	35×30	2.49
1500	152	22×40	2.00	25×35	2.00	30×25	1.95							30×40	2.84	35×40	2.84
1800	182	22×45	2.20	25×40	2.20	30×30	2.20							30×50	3.32	35×40	3.30
2200	222			25×45	2.50	30×35	2.55	35×30	2.60							35×45	3.45
2700	272			25×50	2.80	30×40	2.85	35×35	2.90								
3300	332					30×45	3.30	35×35	3.25								
3900	392					30×50	3.60	35×40	3.65								
4700	472							35×45	3.80								
5600	562							35×50	4.05								

额定电压 WV 尺寸 Size 额定容量 CAR(μF)		100(2A)								160(2C)							
		Φ22		Φ25		Φ30		Φ35		Φ22		Φ25		Φ30		Φ35	
		尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple
150	151									22×25	0.79						
180	181									22×30	0.88						
220	221	22×25	0.75							22×35	1.00						
270	271	22×30	0.85							22×40	1.18	25×30	1.27				
330	331	22×30	1.10							22×40	1.30	25×30	1.30	30×25	1.35		
390	391	22×35	1.35	25×25	1.35					22×45	1.49	25×35	1.49	30×30	1.49		
470	471	22×40	1.50	25×30	1.50	30×25	1.50			22×50	1.65	25×40	1.65	30×35	1.65		
560	561	22×40	1.67	25×30	1.59	30×25	1.67					25×45	1.80	30×40	1.80		
680	681	22×45	1.78	25×35	1.72	30×30	1.78					25×50	2.03	30×45	2.00	35×30	2.00
820	821			25×40	1.99	30×35	2.04	35×30	2.04					30×50	2.30	35×40	2.30
1000	102			25×50	2.42	30×40	2.30	35×35	2.30							35×40	2.69
1200	122					30×45	2.65	35×40	2.65							35×45	3.09
1500	152							35×45	3.08								
1800	182							35×45	3.48								

额定电压 WV 尺寸 Size 额定容量 CAR(μF)		100(2A)								160(2C)							
		Φ22		Φ25		Φ30		Φ35		Φ22		Φ25		Φ30		Φ35	
		尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple
56	560									22×25	0.51						
68	680	22×25	0.47							22×30	0.55						
82	820	22×30	0.54							22×30	0.64						
100	101	22×30	0.69							22×35	0.70	25×25	0.70				
120	121	22×35	0.70							22×40	0.73	25×30	0.73				
150	151	22×35	0.77							22×40	0.88	25×30	0.83	30×25	0.88		
180	181	22×40	0.87	25×30	0.92	30×25	0.90			22×40	0.93	25×35	0.98	30×30	0.98		
220	221	22×45	1.00	25×35	1.04	30×30	1.02			22×45	1.05	25×35	1.04	30×30	1.10		
270	271	22×50	1.11	25×40	1.18	30×30	1.17					25×40	1.29	30×35	1.22	35×30	1.22
330	331			25×45	1.29	30×35	1.34	35×30	1.22					30×45	1.55	35×30	1.44
390	391			25×50	1.51	30×35	1.43	35×30	1.45					30×45	1.60	35×35	1.60
470	471					30×40	1.57	35×35	1.65					30×50	1.90	35×40	1.90
560	561					30×50	1.85	35×40	1.90					30×60	2.11	35×45	2.12
680	681													30×70	2.40	35×50	2.40
820	821															35×60	2.83

尺寸Case Size φD×L(mm)

最大允许纹波电流Maximum Allowable Ripple Current (A rms) at 105°C 120Hz

尺寸 Dimensions

额定容量 CAP(μF)		额定电压 WV		420(2M)								420(2M)							
				Φ22		Φ25		Φ30		Φ35		Φ22		Φ25		Φ30		Φ35	
				尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple	尺寸 Size	纹波 Ripple
47	470											22×25	0.39						
56	560	22×25	0.51									22×25	0.50						
68	680	22×30	0.55									22×30	0.53	25×25	0.53				
82	820	22×35	0.64									22×35	0.64	25×25	0.64				
100	101	22×35	0.70	25×25	0.70							22×35	0.65	25×25	0.64	30×25	0.72		
120	121	22×40	0.70	25×30	0.70	30×25	0.78					22×40	0.80	25×30	0.80	30×25	0.80		
150	151	22×40	0.88	25×35	0.88	30×25	0.88					22×40	0.84	25×35	0.88	30×30	0.88		
180	181	22×40	0.90	25×35	0.92	30×30	0.96	35×25	0.94					25×40	1.00	30×30	1.00		
220	221	22×45	1.05	25×40	1.05	30×30	1.03	35×25	1.10					25×40	1.12	30×35	1.12	35×30	1.12
270	271			25×45	1.37	30×35	1.18	35×30	1.22							30×40	1.28	35×35	1.28
330	331					30×45	1.49	35×35	1.36							30×45	1.39	35×40	1.45
390	391					30×45	1.60	35×40	1.66									35×40	1.55
470	471							35×40	1.81									35×50	1.85
560	561															30×70	2.18	35×50	2.18
680	681																	35×60	2.45
820	821																	35×70	2.90

尺寸 Size φD×L(mm)

最大允许纹波电流 Maximum Allowable Ripple Current (A rms) at 105°C 120Hz