

CKJ系列交流低压真空接触器

主要技术参数

型号	额定电压 (工频) (V)		额定电流 (主电路) (A)	主触头参数		工频耐压 V (有效值)
	主电路	控制电路		开距 (mm)	超程 (mm)	
CKJ-63/660	660	36/110/220/380	63	1.6 ± 0.2	>1	4200
CKJ5-160/1140(125、80)	1140	36/110/220/380	160	1.8 ± 0.2	>1	4200
CKJ5-250/1140	1140	36/110/220/380	250	2 ± 0.2	>1.5	4200
CKJ5-400/1140	1140	36/110/220/380	400	$2^{+0.5}_0$	>1.5	4200
CKJ5-630/1140	1140	36/110/220/380	630	$2^{+0.5}_0$	>1.5	4200
XGCKJ-1600/1500	1500	220、380	1600	2.5 ± 0.5	>1.5	4200



CKJ-63/660




CKJ5-160/1140




CKJ5-250/1140


外形及安装尺寸

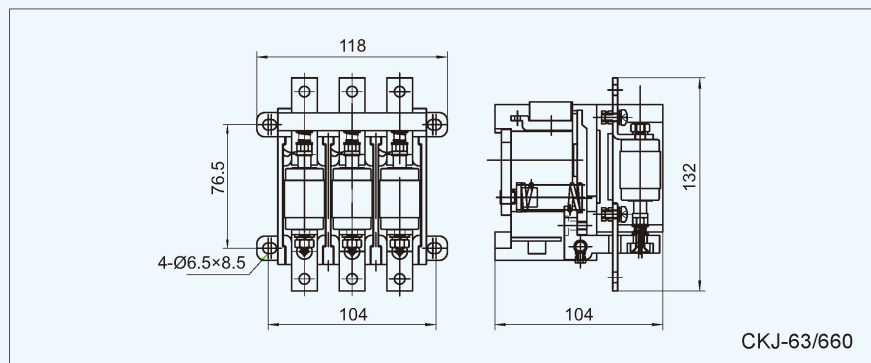

CKJ-63/660

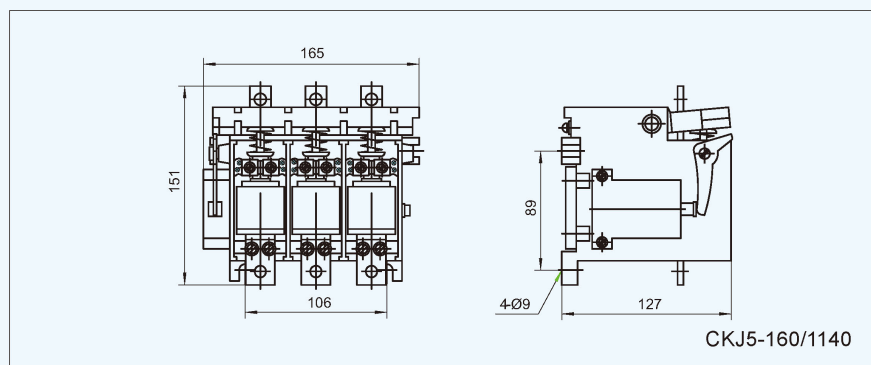

CKJ5-160/1140

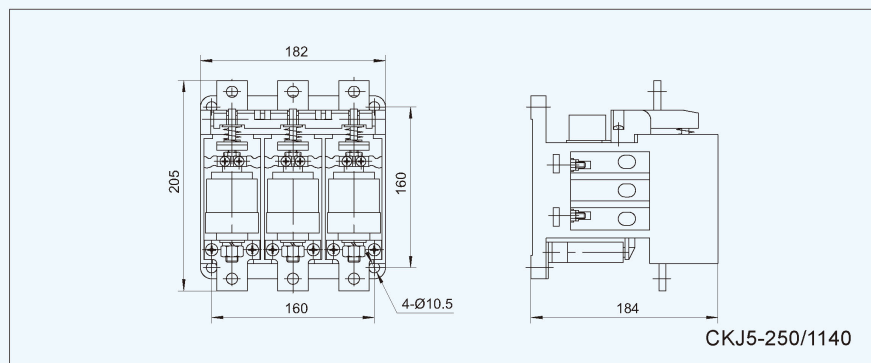


CKJ5-250/1140

外形及安装尺寸




CKJ5-400/1140

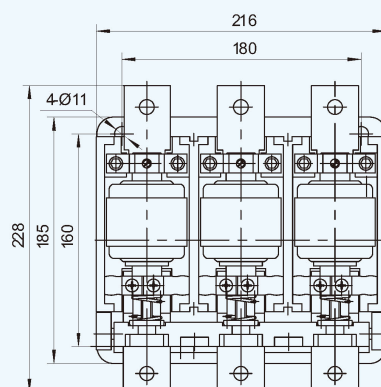


CKJ5-400/1140




CKJ5-630/1140

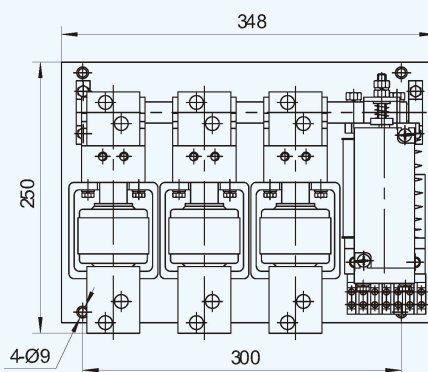

CKJ5-630/1140

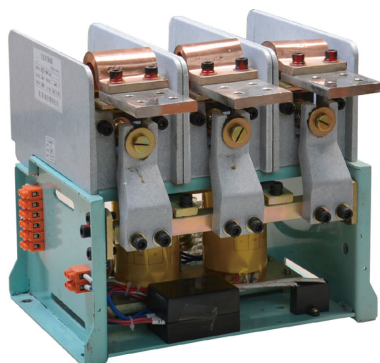

XGCKJ-1600/1500

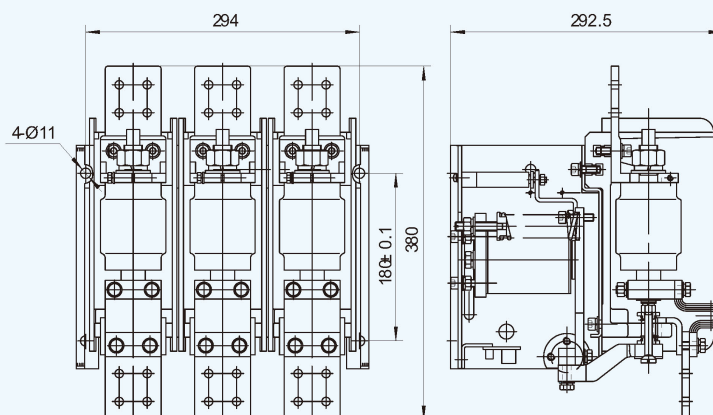

XGCKJ-1600/1500