

特征 Features



- ◎ 用于电机的直接启动与静止，也用于负载电流的经常性启动和断开。
- ◎ 形式有露出型、埋入型，材料有金属外壳、塑料外壳可供选择。
- ◎ Used in electrical machine's start and stop, also used in load current's frequent open and close.
- ◎ Surface& flush mounting, plastic&metal shell for selection.



特性 Characteristics

型式 Model	规格 Spec	安装型式 Mounting type	接线端子 Connection terminal	外壳材质 Material
TBSN-310	3 φ 10A 1.5KW	露出型 Surface mounting	M3.5	铁烤漆 Iron
TBSN-315	3 φ 15A 2.2KW		M4	
TBSN-330	3 φ 30A 3.7KW		M5	
TBSP-315	3 φ 15A 2.2KW	露出型 Surface mounting	M4	强化塑胶 Plastic
TBSP-330	3 φ 30A 3.7KW		M4	
TBSY-315	3 φ 15A 2.2KW	埋入型 Flush mounting	M4	铁烤漆 Iron
TBSY-330	3 φ 30A 3.7KW		M4	
TBSS-315	3 φ 15A 2.2KW	埋入型 Flush mounting	M3.5	铁烤漆 Iron
TBSS-330	3 φ 30A 3.7KW		M4	
TPB-2	3A 250VAC	露出型 Surface mounting	M4	强化塑胶 Plastic
TPB-3	3A 250VAC			

按钮开关 Pushbutton Switch

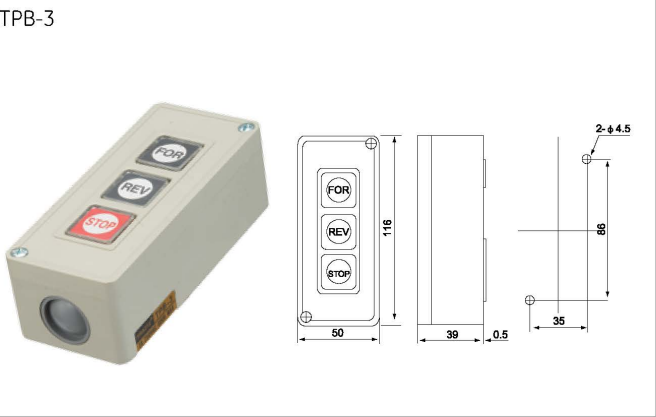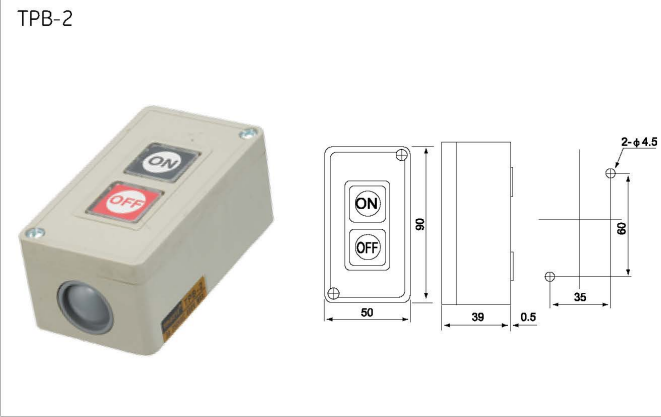

外观和尺寸 Appearance and Dimension

