



SL-ST 系列 - 鋼鐵製滑軌

SL Series- Steel Slide

- 材質：鐵
- Material : Steel
- 表面處理：鍍鋅
- S.Tr : Zinc Plated



SL-ST

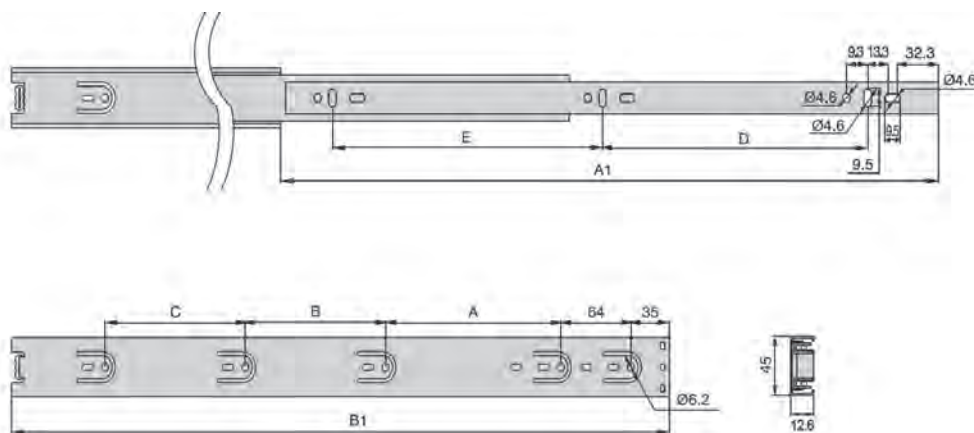

型號 Item No : SL - □"-ST

單位 : (mm)

型號	拉出 長度	尺寸表							荷重 Load Rating 公斤 / 對 (Kg/pair)
Item No.	Travel	A1	B1	A	B	C	D	E	
10"	250	250	250	96			169.4		80
12"	300	300	300	160			96	128	70
14"	350	350	350	160			128	128	60
16"	400	400	400	160	64		128	192	50
18"	450	450	450	160	128		160	192	45
20"	500	500	500	160	128	64	192	224	40
22"	550	550	550	160	128	64	224	224	40
24"	600	605	600	160	128	128	256	256	40

SL-SUS 系列 - 不銹鋼滑軌


Series-Stainless Steel Slide

SUS 304

夾鉗、滑軌、
支撐器、膠條

CLAMP · SLIDE ·
DOOR STAY · GASKETING

- 材質：不銹鋼 304
- Material: Stainless Steel 304

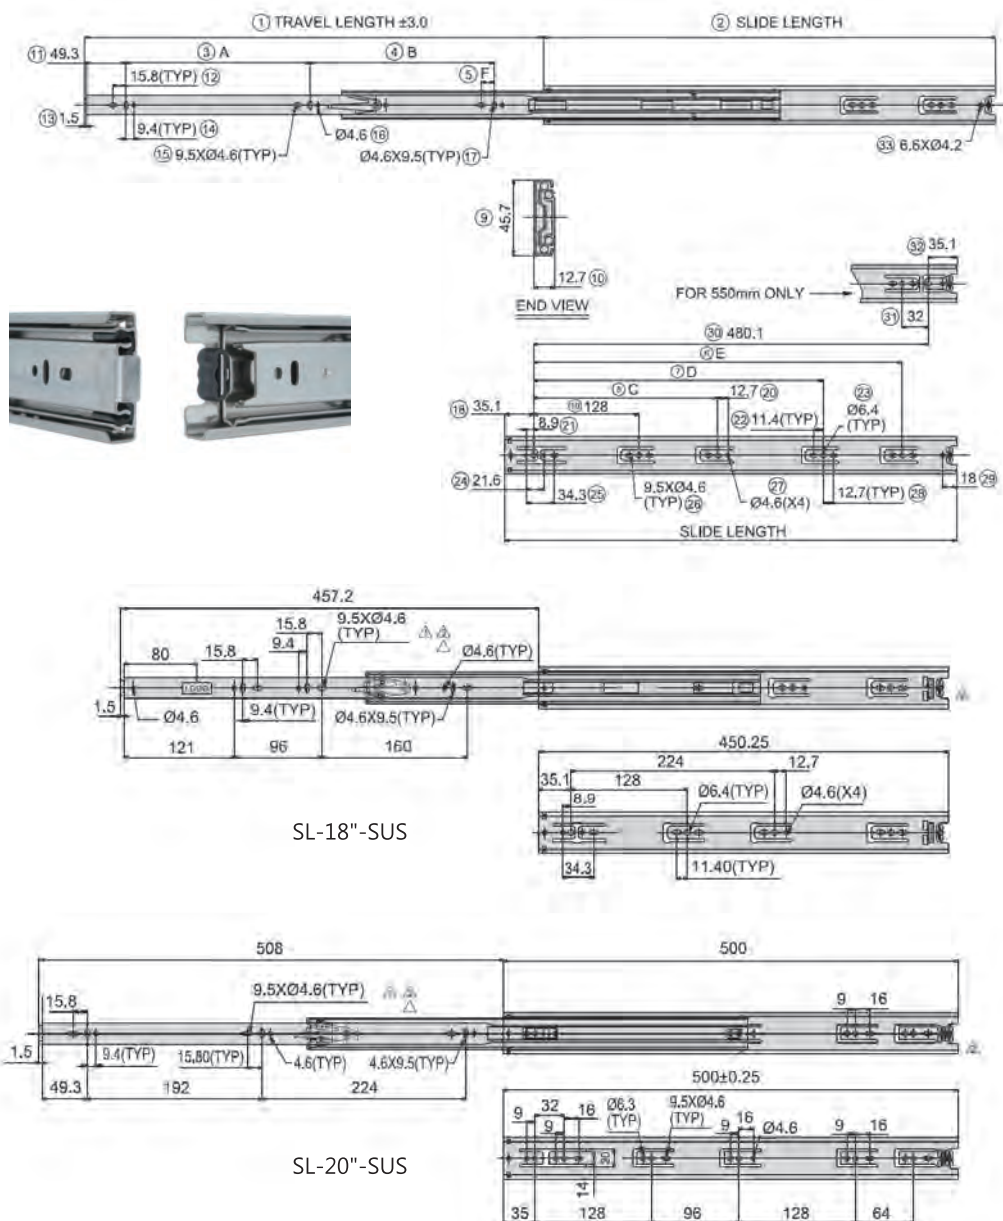

SL-18"-SUS

SL-20"-SUS

型號 Item No : SL - □ -SUS

24"	600 [23.62]	609.6 [24.00]	256 [10.08]	256 [10.08]	224 [8.82]	352 [13.86]	480.1 [18.90]	15.8 [0.62]
22"	550 [21.65]	558.8 [22.00]	224 [8.82]	224 [8.82]	224 [8.82]	352 [13.86]	/	15.8 [0.62]
20"	500 [19.69]	508 [20.00]						
18"	450 [17.72]	457.2 [18.00]						
16"	400 [15.75]	406.4 [16.00]	160 [6.30]	160 [6.30]	224 [8.82]	320 [12.60]	/	15.8 [0.62]
14"	350 [13.78]	355.6 [14.00]	128 [5.04]	128 [5.04]	224 [8.82]	/	/	15.8 [0.62]
12"	300 [11.81]	304.8 [12.00]	96 [3.78]	128 [5.04]	224 [8.82]	/	/	15.8 [0.62]
10"	250 [9.84]	254 [10.00]	169.5 [6.67]	/	/	/	/	/
PROD.NO.	SLIDE LENGTH	TRAVEL LENGTH	A	B	C	D	E	F



SL-SUS

可調行程·限位支撐器

Door Stay




KS-101-1




KS-101-2

伸縮示意圖

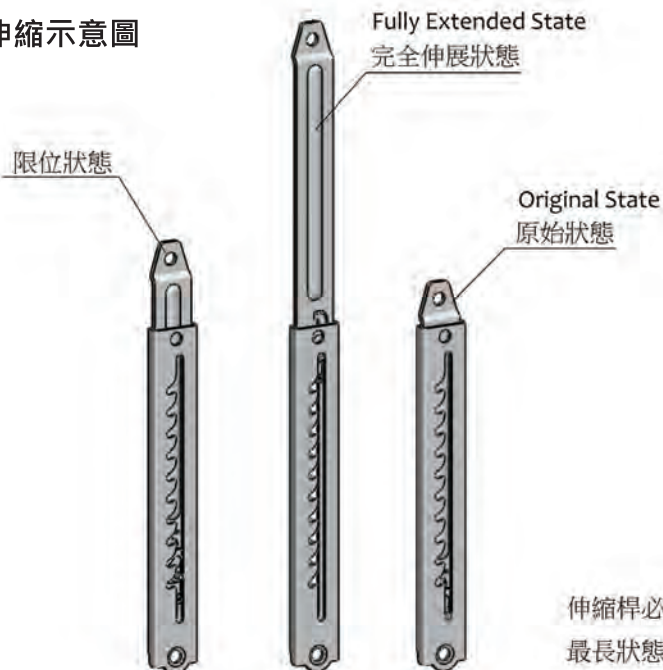

伸縮桿必須拉伸至
最長狀態才能收回

- 材質：鐵製
- Material : steel
- 表面處理：鐵鍍鋅
- S.Tr : Zinc Plated
- 可調節自鎖型限位支撐器

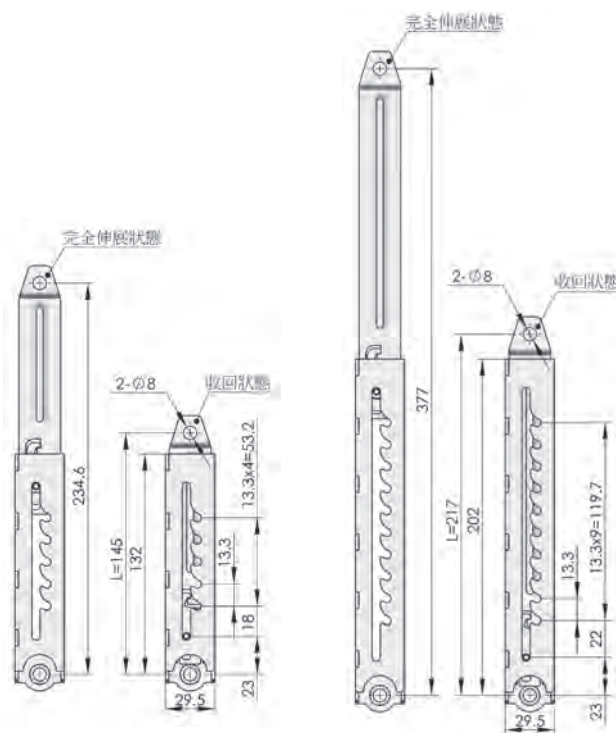

KS-101-1

KS-101-2

型號 Item No	
KS-101-1	L=145mm
KS-101-2	L=217mm

限位支撐器


Door Stay

夾鉗、滑軌、
支撐器、膠條


CLAMP · SLIDE ·
DOOR STAY · GASKETING

KS-80 系列

- 材質：鐵製
- Material：Steel
- 表面處理：鍍亮光鉻
- S. Tr：Bright Chrome Finish

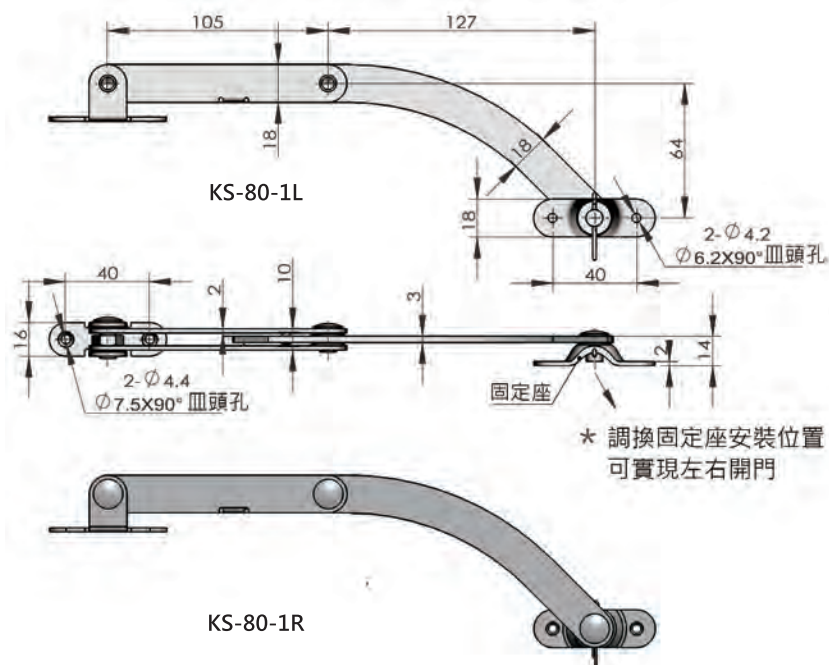

KS-80-1

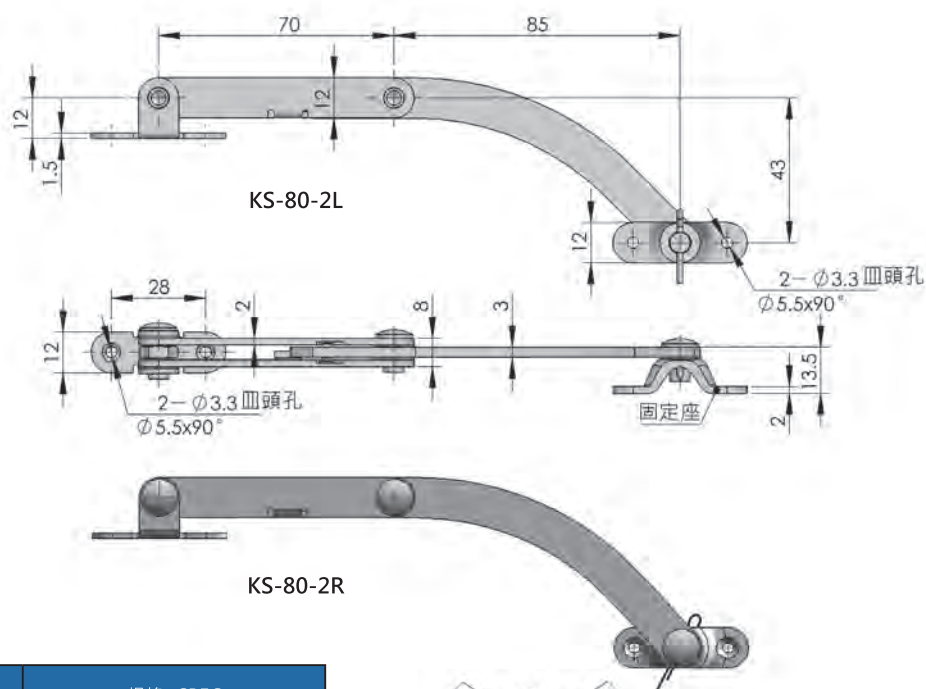

KS-80-2

型號 Item No	規格 . SPEC
KS-80-1L	左開門 For Left Opening Door
KS-80-1R	右開門 For Right Opening Door
KS-80-2L	左開門 For Left Opening Door
KS-80-2R	右開門 For Right Opening Door



限位支撐器

Door Stay

KS-90-1 系列





- 材質：鐵製或不鏽鋼
- Material : Steel or Stainless Steel
- 表面處理：鍍亮鉻或振動研磨
- S. Tr : Bright Chrome or Vibration Polish



KS-90-1R



KS-90-1L

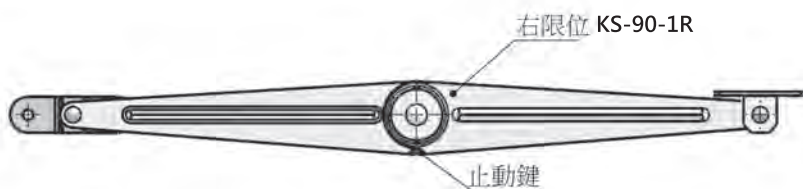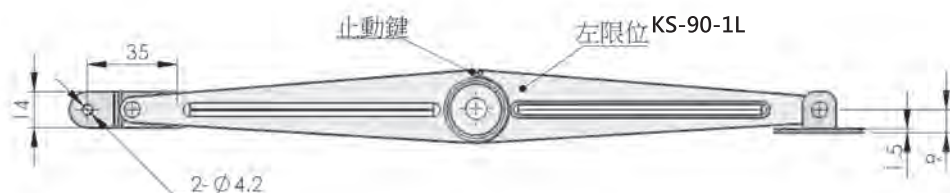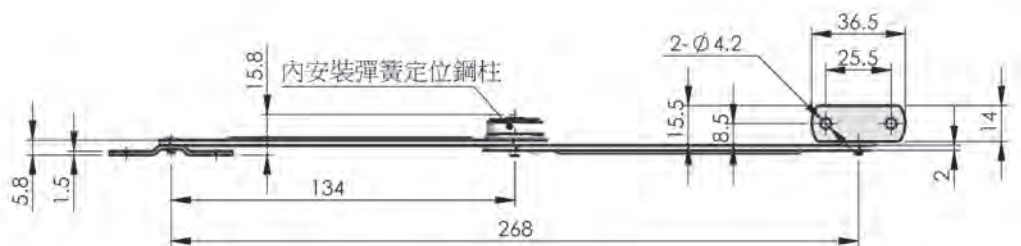

型號 Item No	規格 SPEC
KS-90-1L	左限位 . 鐵製 .Left side.Steel
KS-90-1R	右限位 . 鐵製 .Right side.Steel
KS-90-1L-SS	左限位 . 不鏽鋼製 .Left side.Stainless Steel
KS-90-1R-SS	右限位 . 不鏽鋼製 .Right side.Stainless Steel

限位支撐開閉器

Door Stay



SUS
304

RoHS



夾鉗、滑軌、
支撐器、膠條CLAMP · SLIDE ·
DOOR STAY · GASKETING

KS-91 系列

- 材質：不銹鋼 304. 電解表面
- Material : Stainless Steel 304. Electrolysis.

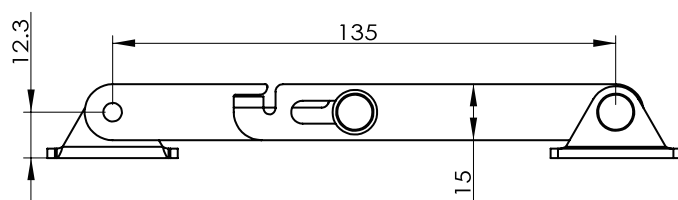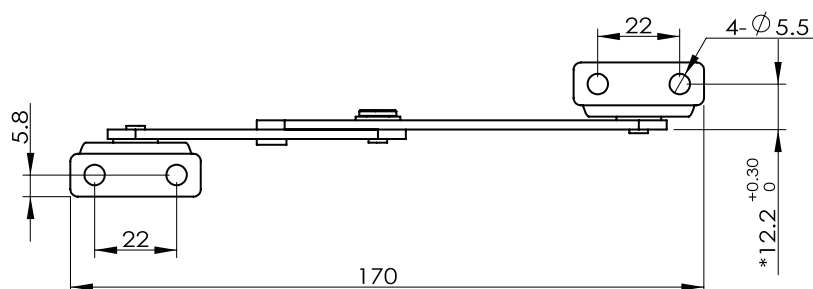

KS-91-3L

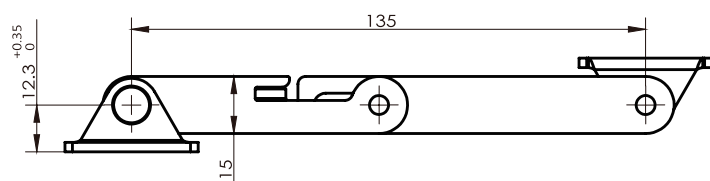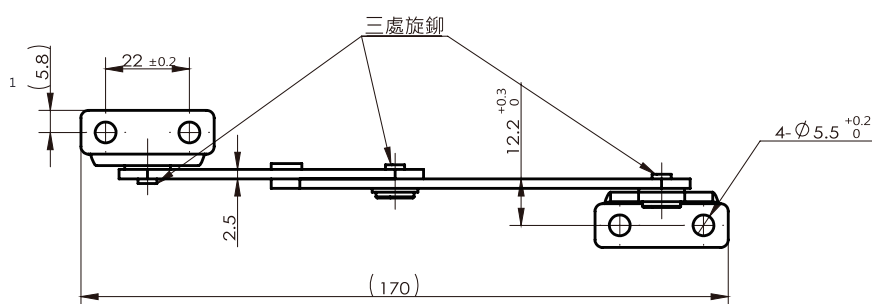

KS-91-3R



KS-91-3R



限位支撐器

Door Stay


SUS 304 RoHS



KS-91

KS-91 系列

- 材質：不銹鋼
- Material : Stainless Steel

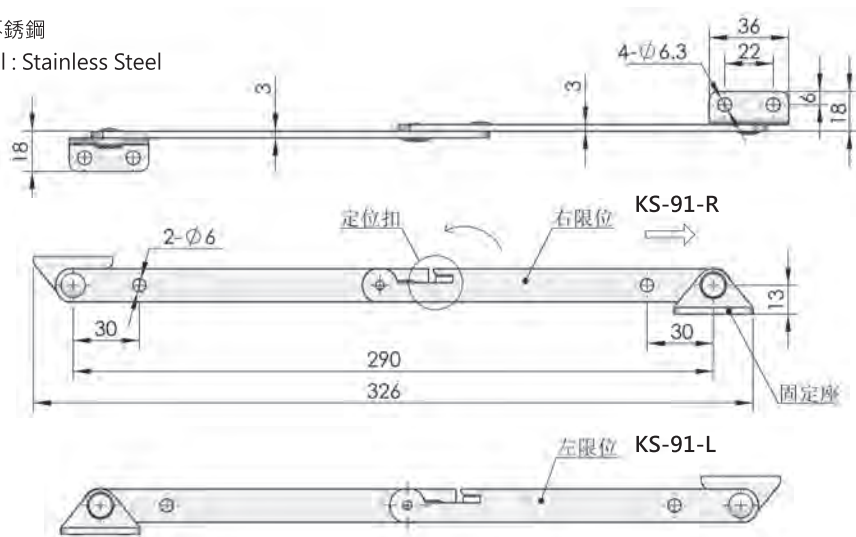


型號 Item No	規格 . SPEC
KS-91-L	左限位 For Left Side
KS-91-R	右限位 For Right Side

KS-90-2 系列

- 材質：鐵製
- Material : Steel
- 表面處理：鍍亮光鉻
- S. Tr : Bright Chrome Finish



KS-90-2R

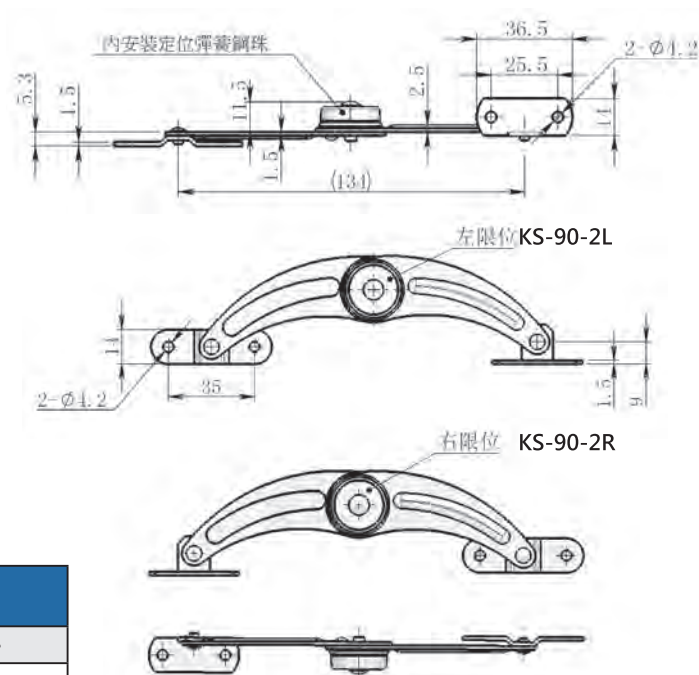

型號 Item No	規格 . SPEC
KS-90-2L	左限位 For Left Side
KS-90-2R	右限位 For Right Side

NOTE

可調間距 · 不銹鋼 · 夾鉗

Adjustable Toggle Clamps


SUS
304

- 材質：不銹鋼 304
- Material : Stainless Steel 304
- 鉤狀頂端可適用於門框或門中的螺柱或孔
- 另有鐵製鍍鋅材質




TH-40325

安裝示意圖

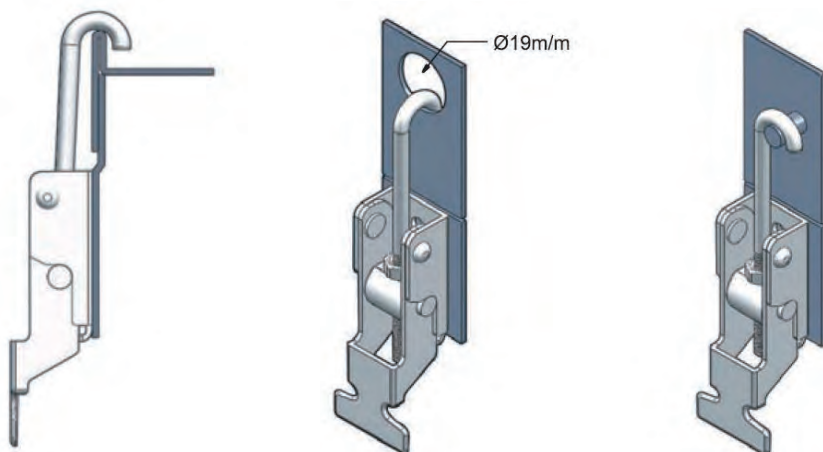

TH-40326

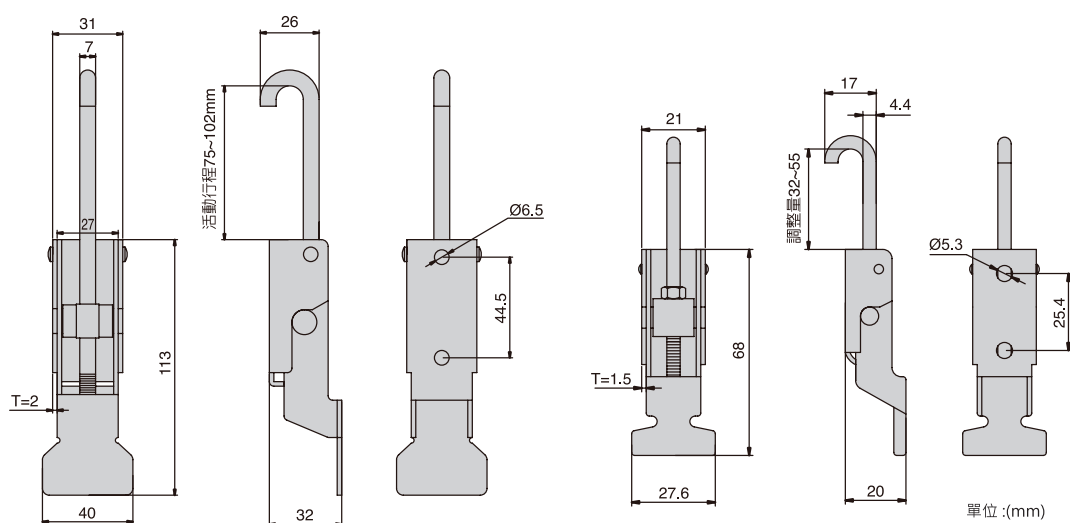

TH-40325


TH-40326

可調間距・水平安裝・不銹鋼・夾鉗

Adjustable Toggle Clamps

SUS
304

- 材質：不銹鋼 304
Material: Stainless Steel 304
- Weight: 70g
- 夾持力：160kg
- Holding capacity: 160kg

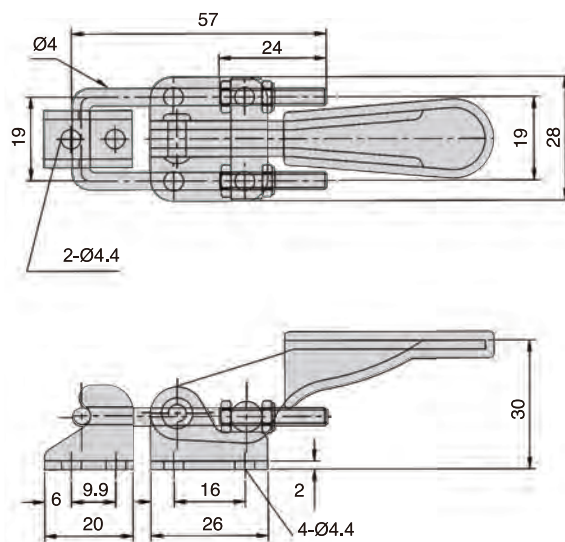


TH-40323-SS

可調間距・垂直型・不銹鋼・夾鉗

Adjustable Toggle Clamps

SUS
304

- 材質：不銹鋼 304
Material: Stainless Steel 304
- Weight: 170g
- 夾持力：95kg
- Holding capacity: 95kg

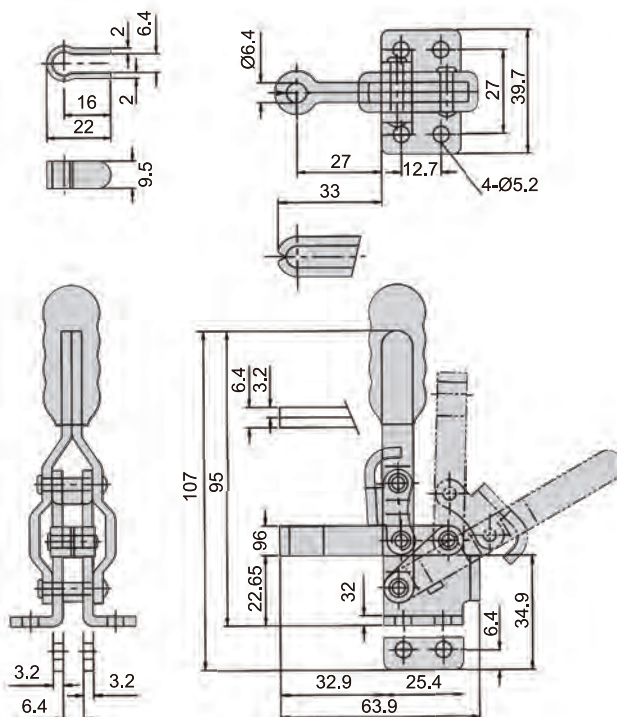

TH-12050-SS

可調間距 · 垂直安裝 · 不銹鋼 · 夾鉗

Adjustable Toggle Clamps

SUS
304




TH-40324-SS

- 材質：不銹鋼 304
- Material : Stainless Steel 304
- Weight : 110g
- 夾持力：225kg
- Holding capacity : 225kg





安裝示意

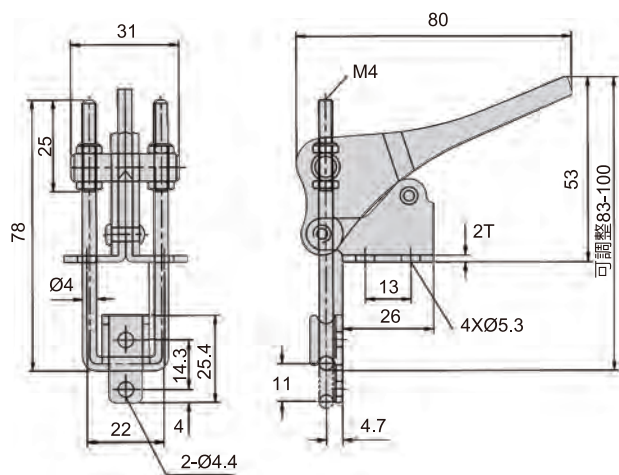



密封膠條

Gasket series

WT-001



WT-002

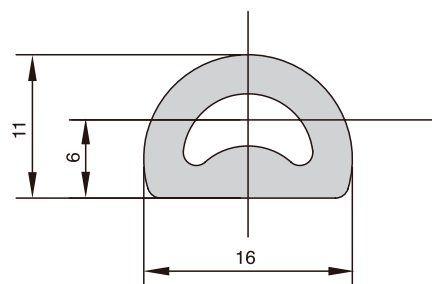


最大壓縮量 5 m.m

密封膠條

Gasket series



WT-009

- 材質：EPDM 橡膠
- 耐溫：-20° C~+100° C
- 適用板厚：1~2mm
- Material：EPDM
- Temperature：-20° C~+100° C
- Applicable platethickness：1~2mm




WT-022

- 材質：EPDM 橡膠
- 耐溫：-20° C~+100° C
- 適用板厚：1~1.5mm
- Material：EPDM
- Temperature：-20° C~+100° C
- Applicable platethickness：1~1.5mm




WT-048

- 材質：EPDM 橡膠
- 耐溫：-10° C~+70° C
- Material：EPDM
- Temperature：-10° C~+70° C



WT-050

- 材質：EPDM 橡膠
- 耐溫：-10° C~+70° C
- Material：EPDM
- Temperature：-10° C~+70° C



WT-065

- 材質：EPDM 橡膠
- 耐溫：-20° C~+100° C
- 適用板厚：1~3.5mm
- Material：EPDM
- Temperature：-20° C~+100° C
- Applicable platethickness：1~3.5mm

