

SM 58UR

技术参数:



压力: $\leq 1.0\text{MPa}$
线速度: $\leq 10\text{m/s}$
温度: $-20^{\circ}\text{C} \sim +150^{\circ}\text{C}$

Operating Limits

Pressure: $\leq 1.0\text{MPa}$
Speed: $\leq 10\text{m/s}$
Temperature: $-20^{\circ}\text{C} \sim +150^{\circ}\text{C}$

- 动环(车制石墨/碳化钨)
- 静环(碳化钨)
- 辅助密封(氟胶/聚四氟乙烯/丁腈胶)
- 弹簧及其它金属件(不锈钢)

- Rotary Ring (Carbon/TC)
- Stationary Ring (TC)
- Secondary Seal (VITON/PTFE/NBR)
- Spring & Other Parts (SUS304/SUS316)

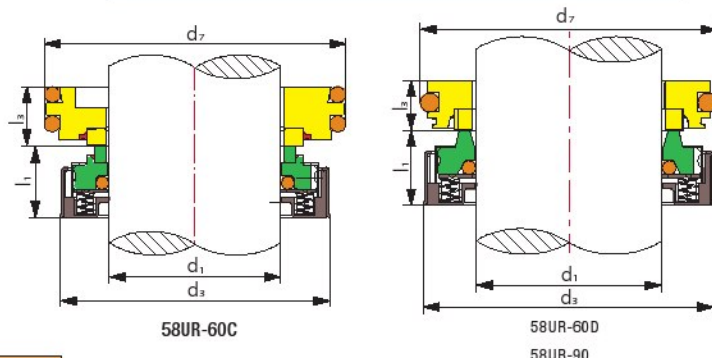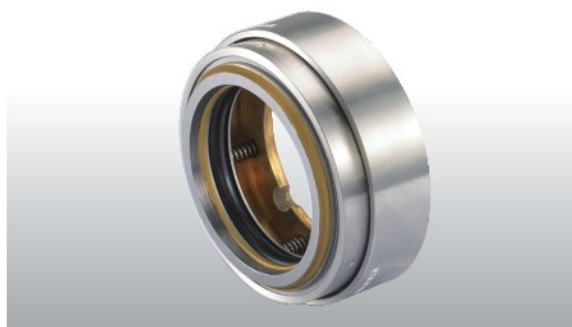

Model	d ₁ (mm)	d ₃	d ₇	l ₁	l ₂	Conform
SM58UR-60C	60	93.0	103.0	36	20.2	58UR-60B
SM58UR-60D	60	93.0	85.5	36	13.0	58UR-60A
SM58UR-90	90	116.5	115.0	32	16.0	/


SM 58B SM 59B

技术参数:

压力: $\leq 2.5\text{MPa}$
线速度: $\leq 25\text{m/s}$
温度: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

Operating Limits

Pressure: $\leq 2.5\text{MPa}$
Speed: $\leq 25\text{m/s}$
Temperature: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

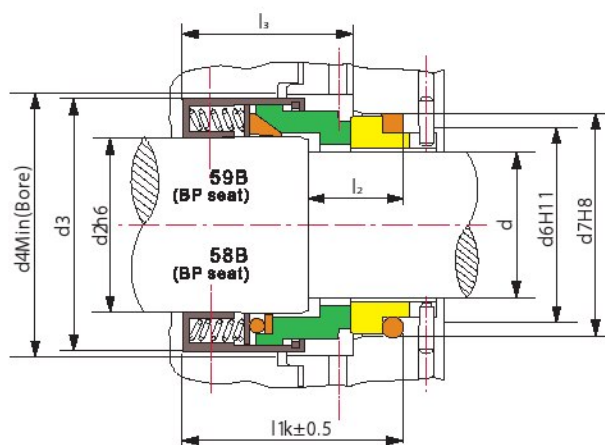

设计特点:

- a. 符合ISO3069和DIN24960标准
- b. 平衡型机械密封
- c. SM58B是橡胶O形圈结构; SM59B是聚四氟乙烯结构
- d. 材料同SM58U, SM59U

Design Features:

- a. Conform to ISO3069 and DIN24960 standards
- b. Balanced mechanical seal
- c. SM58B is rubber O-ring, SM59B is PTFE seal ring
- d. Materials same as SM58U, SM59U

Seal size d(mm)	d ₂	d ₃	d ₄	l, k	l ₂	l ₃	d ₆	d ₇
14	18	32	34	42.5	18	30.5	21	25
16	20	34	36	42.5	18	30.5	23	27
18	22	36	38	45.0	20	31.5	27	33
20	24	38	40	45.0	20	31.5	29	35
22	26	40	42	45.0	20	31.5	31	37
24	28	42	44	47.5	20	34.2	33	39
25	30	44	46	47.5	20	34.5	34	40
28	33	47	49	50.0	20	37.5	37	43
30	35	49	51	50.0	20	38.0	39	45
32	38	54	58	50.0	20	38.0	42	48
33	38	54	58	50.0	20	38.0	42	48
35	40	56	60	50.0	20	38.0	44	50
38	43	59	63	52.5	23	39.5	49	56
40	45	61	65	52.5	23	39.5	51	58
43	48	64	68	52.5	23	39.5	54	61
45	50	66	70	52.5	23	39.5	56	63
48	53	69	73	52.5	25	39.5	59	66
50	55	71	75	57.5	25	44.0	62	70
53	58	78	83	57.5	25	44.0	65	73
55	60	80	85	57.5	25	44.0	67	75
58	63	83	88	62.5	25	49.0	70	78
60	65	85	90	62.5	25	49.0	72	80
63	68	88	93	62.5	25	49.0	75	83
65	70	90	95	62.5	25	49.0	77	85
70	75	95	104	70.0	28	55.5	83	92
75	80	104	109	70.0	28	55.5	88	97
80	85	109	114	70.0	28	55.0	95	105
85	90	114	119	75.0	28	60.0	100	110
90	95	119	124	75.0	28	60.0	105	115
95	100	124	129	75.0	28	60.0	110	120
100	105	129	134	75.0	28	60.0	115	125