
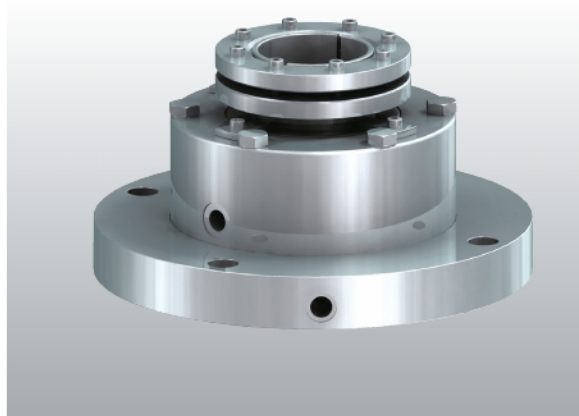


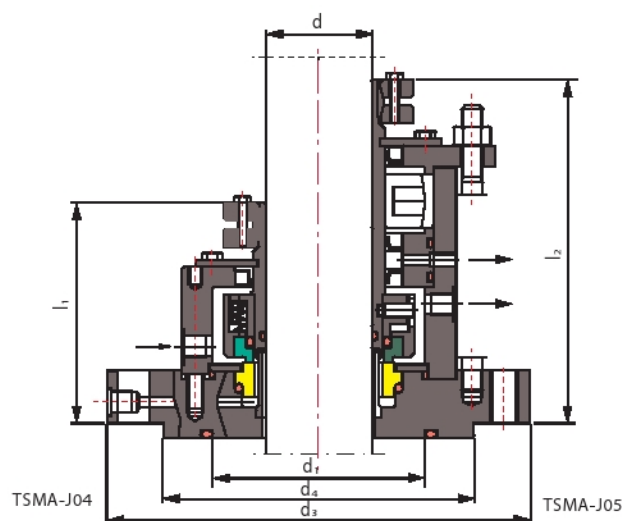

SM-2001 SM-2002

技术参数：

压力：≤0.6MPa
速率：≤1000rpm
温度：-60℃~+260℃

Operating Limits

Pressure：≤0.6MPa
Speed：≤1000rpm
Temperature：-60℃~+260℃

- 动环(碳化硅/石墨/碳化钨)
- 静环(碳化硅/陶瓷/碳化钨)
- 辅助密封(氟胶/包覆圈/聚四氟乙烯)
- 其它部件(SUS304/SUS316/钛材/哈氏-C)

- Rotary Ring(SiC/Carbon/TC)
- Stationary Ring(SiC/Ceramic/TC)
- Secondary Seal(VITON/Encapsulated Ring/PTFE)
- Other Parts(SUS304/SUS316/Titanium/Hastelloy-C)

d (mm)	d ₁	d ₂	d ₄	l ₁	l ₂
40	91	175	110	115	165
50	107	240	176	115	175
60	120	240	176	125	195
80	149	275	204	140	215
100	174	305	234	140	230
125	199	330	260	160	255
140	218	395	313	170	275
160	237	395	313	170	275
180	263	445	364	190	300
200	288	445	364	190	320
220	326	505	422	200	335