
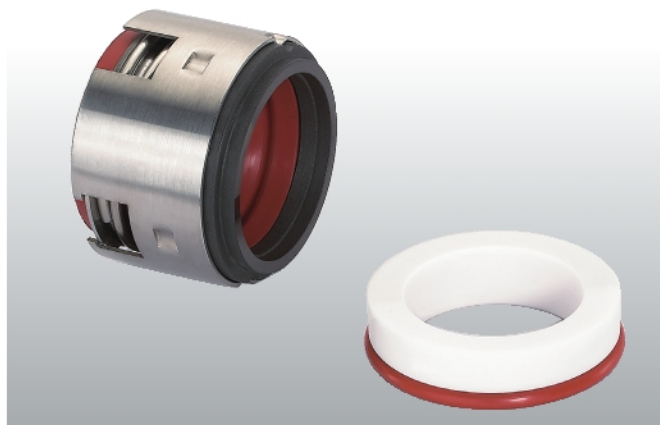


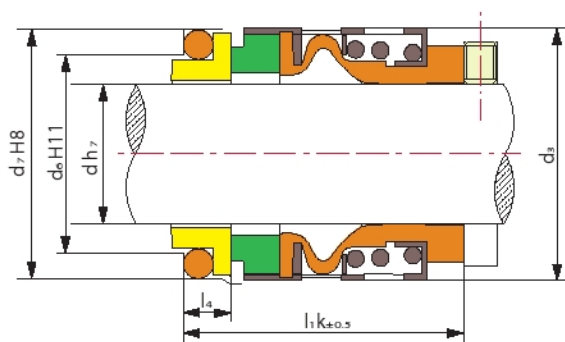

SM 502系列标准配BO静环(DIN24960),另外 还可提供BP、BC静环

SM 502 seal equip with BO seat (DIN24960),Other seats can also be provided,such as BP, BC

SM 502

技术参数:

压力: $\leq 4\text{MPa}$

线速度: $\leq 13\text{m/s}$

温度: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

Operating Limits

Pressure: $\leq 4\text{MPa}$

Speed: $\leq 13\text{m/s}$

Temperature: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

- 动环(车制石墨/碳化硅/碳化钨)
- 静环(99瓷/碳化硅/碳化钨)
- 辅助密封(氟胶/包覆圈)
- 弹簧及其它金属件(不锈钢)

- Rotary Ring (Carbon/SiC/TC)
- Stationary Ring (99%Ceramic/SiC/TC)
- Secondary Seal(VITON/Encapsulated Ring)
- Spring & Other Parts (SUS304/SUS316)

Seal size d(mm)	d _s	d _o	d _r	l, k	l _s
14	24	21	25	35.0	12.0
16	26	23	27	35.0	12.0
18	32	27	33	37.5	13.5
20	34	29	35	37.5	13.5
22	36	31	37	37.5	13.5
24	38	33	39	40.0	13.3
25	39	34	40	40.0	13.0
28	42	37	43	42.5	12.5
30	44	39	45	42.5	12.0
32	46	42	48	42.5	12.0
35	49	44	50	42.5	12.0
38	54	49	56	45.0	13.0
40	55	51	58	45.0	13.0
45	61	56	63	45.0	13.0
50	66	62	70	47.5	13.5
55	71	67	75	47.5	13.5
60	80	72	80	52.5	13.5
70	89	83	92	60.0	14.5
80	104	95	105	60.0	15.0