
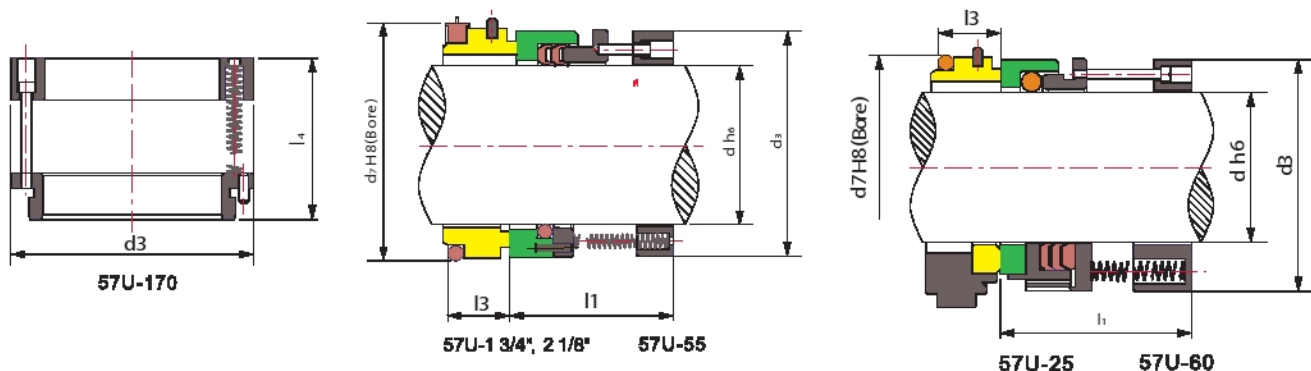


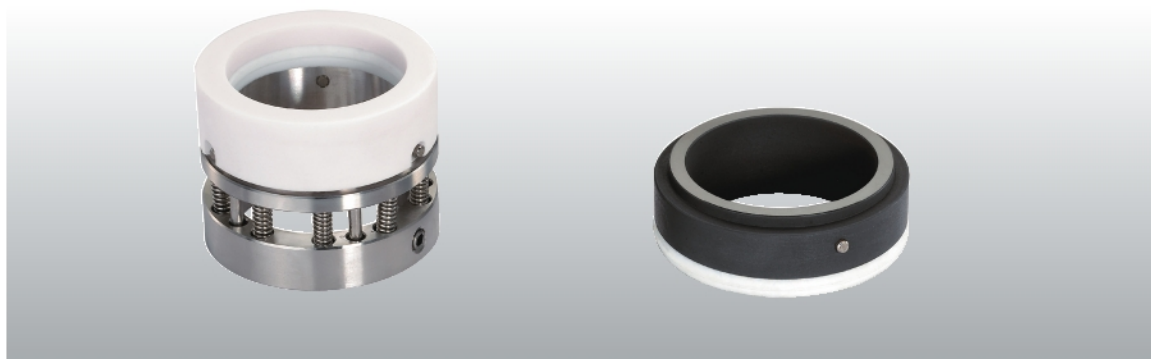

SM 57U

技术参数:

压力: $\leq 1.2\text{MPa}$
线速度: $\leq 20\text{m/s}$
温度: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

Operating Limits

Pressure: $\leq 1.2\text{MPa}$
Speed: $\leq 20\text{m/s}$
Temperature: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

- 动环(99瓷/碳化硅/碳化钨)
- 静环(车制石墨/碳化硅)
- 辅助密封(聚四氟乙烯/氟胶)
- 弹簧及销钉(不锈钢)
- 其它金属件(不锈钢)

- Rotary Ring (99% Ceramic/SiC/TC)
- Stationary Ring (Carbon/SiC)
- Secondary Seal (PTFE/VITON)
- Spring & Screw (SUS304/SUS316)
- Other Parts (SUS304/SUS316)

Seal size d(mm)	d	d _s	d _r	l ₁	l ₂	l ₄
25	25.0	39.0	50.0	34.0	19.5	\
55	55.0	73.0	75.0	30.0	16.5	\
60	60.0	81.0	\	43.0	26.0	\
170	170.0	195.3	\	\	\	33

Seal size (inches)	d	d _s	d _r	l ₁	l ₂	l ₄
1 3/4"	44.450	60.0	62.0	44.0	20.5	\
2 1/8"	53.975	71.2	71.4	43.0	20.8	\