





SM58U 配O型圈 (With O Ring)

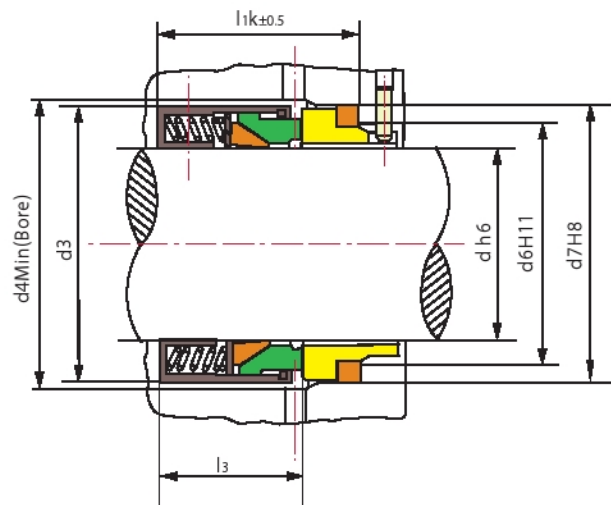

SM59U 配楔型圈 (With Wedge Ring)

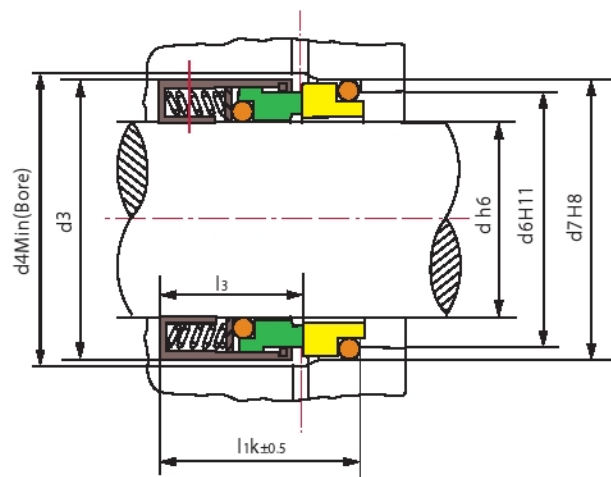

SM 58U SM 59U

技术参数:

压力: $\leq 1.7\text{MPa}$
线速度: $\leq 25\text{m/s}$
温度: $-20^{\circ}\text{C} \sim +200^{\circ}\text{C}$

Operating Limits

Pressure: $\leq 1.7\text{MPa}$
Speed: $\leq 25\text{m/s}$
Temperature: $-20^{\circ}\text{C} \sim +200^{\circ}\text{C}$

设计特点:

符合ISO3069, DIN24960 和
BS5257-1975标准

Design Features:

Conform to ISO3069, DIN24960
and BS5257-1975 standards

- 动环(车制石墨/碳化硅/碳化钨)
- 静环(99瓷/碳化硅/碳化钨)
- 辅助密封(氟胶/聚四氟乙烯/包覆圈)
- 弹簧及其它金属件(不锈钢)

- Rotary Ring (Carbon/SiC/TC)
- Stationary Ring(99%Ceramic/SiC/TC)
- Secondary Seal(VITON/PTFE/Encapsulated Ring)
- Spring & Other Parts (SUS304/SUS316)

Seal size d(mm)	d ₃	d ₄	l ₁ k	l ₃	d ₆	d ₇
14	24	26	35.0	23.0	21	25
16	26	28	35.0	23.0	23	27
18	32	34	37.5	24.0	27	33
20	34	36	37.5	24.0	29	35
22	36	38	37.5	24.0	31	37
24	38	40	40.0	26.7	33	39
25	39	41	40.0	27.0	34	40
28	42	44	42.5	30.0	37	43
30	44	46	42.5	30.5	39	45
32	46	48	42.5	30.5	42	48
33	47	49	42.5	30.5	42	48

Seal size d(mm)	d ₃	d ₄	l ₁ k	l ₃	d ₆	d ₇
35	49	51	42.5	30.5	44	50
38	54	58	45.0	32.0	49	56
40	55	60	45.0	32.0	51	58
43	59	63	45.0	32.0	54	61
45	61	65	45.0	32.0	56	63
48	64	68	45.0	32.0	59	66
50	66	70	47.5	34.0	62	70
53	69	73	47.5	34.0	65	73
55	71	75	47.5	34.0	67	75
58	78	83	52.5	39.0	70	78
60	80	85	52.5	39.0	72	80

Seal size d(mm)	d ₃	d ₄	l ₁ k	l ₃	d ₆	d ₇
63	83	88	52.5	39.0	75	83
65	85	90	52.5	39.0	77	85
68	88	93	52.5	39.0	81	90
70	90	95	60.0	45.5	83	92
75	95	104	60.0	45.5	88	97
80	104	109	60.0	45.0	95	105
85	109	114	60.0	45.0	100	110
90	114	119	65.0	50.0	105	115
95	119	124	65.0	50.0	110	120
100	124	129	65.0	50.0	115	125