


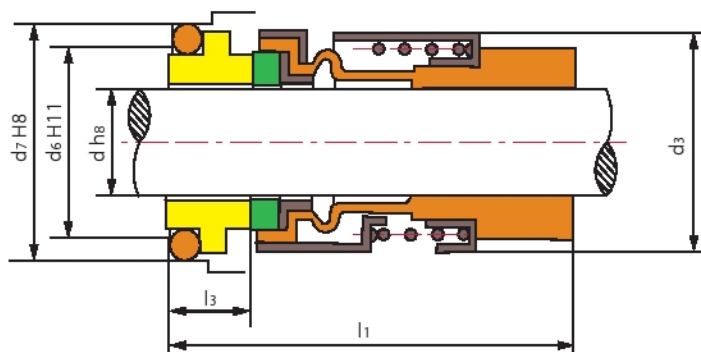

SM G3

技术参数:

压力: $\leq 1.2\text{MPa}$
线速度: $\leq 10\text{m/s}$
温度: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

Operating Limits

Pressure: $\leq 1.2\text{MPa}$
Speed: $\leq 10\text{m/s}$
Temperature: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

- 动环(碳化硅/碳化钨)
- 静环(车制石墨/碳化硅/碳化钨)
- 辅助密封(丁腈胶/氟胶)
- 传动套(不锈钢)
- 弹簧(不锈钢)

- Rotary Ring(SiC/TC)
- Stationary Ring(Carbon/SiC/TC)
- Secondary Seal(NBR/VITON)
- Retainer(SUS304/SUS316)
- Spring(SUS304/SUS316)

Seal size d(mm)	d ₃	d ₆	d ₇	l ₁	l ₃
12	22	19	23	39.0	7.6
12A	22	19	23	34.0	7.6
14	24	21	25	40.6	6.6
15	26	23	27	39.0	8.7
16	26	23	27	39.0	8.7