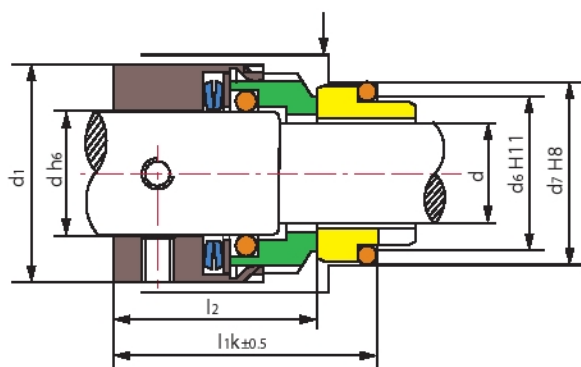
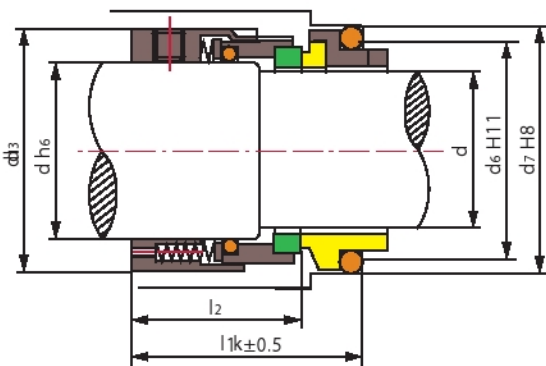



H7N

H75

SMH7N 波簧结构 SMH7N Wave Spring

SMH75 多弹簧结构 SMH75 Multiple Spring

SM H7N SM H75

技术参数:

压力: $\leq 2.5\text{MPa}$

线速度: $\leq 20\text{m/s}$

温度: $-20^{\circ}\text{C} \sim +220^{\circ}\text{C}$

- 动环(碳化硅/碳化钨/车制石墨)
- 静环(车制石墨/碳化硅/碳化钨)
- 辅助密封(氟胶/包覆圈)
- 金属件(不锈钢)
- 波簧(17-7PH/不锈钢)

Operating Limits

Pressure: $\leq 2.5\text{MPa}$

Speed: $\leq 20\text{m/s}$

Temperature: $-20^{\circ}\text{C} \sim +220^{\circ}\text{C}$

- Rotary Ring (SiC/TC/Carbon)
- Stationary Ring (Carbon/SiC/TC)
- Secondary Seal (VITON/Encapsulated Ring)
- Metal Parts (SUS304/SUS316)
- Wave Spring (17-7PH/SUS304/SUS316)

Seal size d(mm)	d ₀	d ₁	d ₀	d ₁	l ₂	l ₁ k
25	30	45	34	40	36.0	47.5
28	33	48	37	43	38.5	50.0
30	35	50	39	45	38.5	50.0
33	38	55	42	48	38.5	50.0
35	40	57	44	50	38.5	50.0
38	43	60	49	56	38.5	52.5
40	45	62	51	58	38.5	52.5
43	48	65	54	61	38.5	52.5
45	50	67	56	63	38.5	52.5
48	53	70	59	66	38.5	52.5
50	55	72	62	70	42.5	57.5
53	58	79	65	73	42.5	57.5
55	60	81	67	75	42.5	57.5
60	65	86	72	80	47.5	62.5
65	70	91	77	85	47.5	62.5
70	75	99	83	92	52.0	70.0
75	80	104	88	97	52.0	70.0
80	85	109	95	105	51.8	70.0
85	90	114	100	110	56.8	75.0
90	95	119	105	115	56.8	75.0
95	100	124	110	120	57.8	75.0