

SM HJ

技术参数:

压力: $\leq 2.5\text{MPa}$

线速度: $\leq 20\text{m/s}$


温度: $-20^{\circ}\text{C} \sim +180^{\circ}\text{C}$

Operating Limits

Pressure: $\leq 2.5\text{MPa}$

Speed: $\leq 20\text{m/s}$

Temperature: $-20^{\circ}\text{C} \sim +180^{\circ}\text{C}$

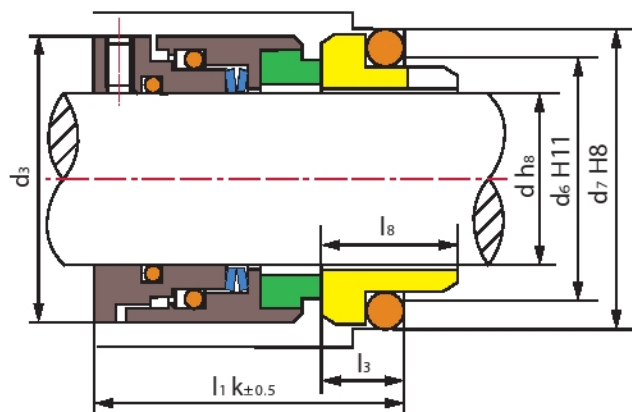

- 动环(碳化硅/碳化钨/碳石墨)
- 静环(车制石墨/碳化硅/碳化钨)
- 辅助密封(氟胶/包覆圈)
- 金属件(不锈钢)
- 波簧(17-7PH/不锈钢)

- Rotary Ring (SiC/TC/Carbon)
- Stationary Ring (Carbon/SiC/TC)
- Secondary Seal (VITON/Encapsulated Ring)
- Metal Parts (SUS304/SUS316)
- Wave Spring (17-7PH/SUS304/SUS316)

介质: 含固体颗粒和高粘度液体,
如制糖、造纸、污水等工业。

Medium: Liquid rich in solid impurity
or high viscosity, such as refine sugar,
sewage and paper industry.

设计特点:

- 单端面平衡型
- 符合DIN24960和GB6556标准

Design Features:

- Single face, balanced.
- Conform to the DIN24960 and GB6556 standards.

Seal size d(mm)	d _s	d _e	d _r	l ₈	l _{1,k}	l ₃
18	32	27	33	15.0	37.5	7
20	34	29	35	15.0	37.5	7
22	36	31	37	15.0	37.5	7
24	38	33	39	15.0	40.0	7
25	39	34	40	15.0	40.0	7
28	42	37	43	15.0	42.5	7
30	44	39	45	15.0	42.5	7
32	47	42	48	15.0	42.5	7
33	47	42	48	15.0	42.5	7
35	49	44	50	15.0	42.5	7
38	54	49	56	16.0	45.0	8
40	56	51	58	16.0	45.0	8
43	59	54	61	16.0	45.0	8
45	61	56	63	16.0	45.0	8
48	64	59	66	16.0	45.0	8

Seal size d(mm)	d _s	d _e	d _r	l ₈	l _{1,k}	l ₃
50	66	62	70	17.0	47.5	9.5
53	69	65	73	17.0	47.5	9.5
55	71	67	75	17.0	47.5	9.5
58	78	70	78	18.0	52.5	10.5
60	80	72	80	18.0	52.5	10.5
63	83	75	83	18.0	52.5	10.5
65	85	77	85	18.0	52.5	10.5
68	88	81	90	18.5	52.5	11.0
70	90	83	92	19.0	60.0	11.5
75	99	88	97	19.0	60.0	11.5
80	104	95	105	19.0	60.0	11.5
85	109	100	110	19.0	60.0	11.5
90	114	105	115	20.5	65.0	13.0
95	119	110	120	20.5	65.0	13.0
100	124	115	125	20.5	65.0	13.0