


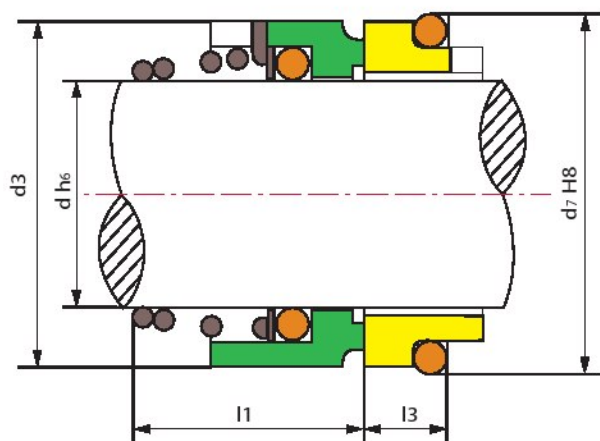

SM M2N

技术参数:

压力: $\leq 1\text{MPa}$
线速度: $\leq 15\text{m/s}$
温度: $-20^{\circ}\text{C} \sim +180^{\circ}\text{C}$

Operating Limits

Pressure: $\leq 1\text{MPa}$
Speed: $\leq 15\text{m/s}$
Temperature: $-20^{\circ}\text{C} \sim +180^{\circ}\text{C}$

- 动环(车制石墨/碳化硅)
- 静环(99陶瓷/碳化硅)
- 辅助密封(丁腈胶/三元乙丙胶/氟胶/聚四氟乙烯)
- 弹簧及其它金属件(不锈钢)

- Rotary Ring(Carbon/SiC)
- Stationary Ring(99%Ceramic/SiC)
- Secondary Seal (NBR/EPDM/VITON/PTFE)
- Spring & Other Parts (SUS304/SUS316)

设计特点:

- 1.单端面密封
- 2.非平衡型
- 3.锥形弹簧
- 4.旋转方向固定
- 5.符合DIN24960

Design Features:

1. Single seal
2. Unbalanced
3. Conical spring
4. Dependent on direction
5. To DIN 24960

静环型式:

1. TS M2N标准配G9静环(DIN24960)
2. 另可配G6(DIN24960)和G4静环

Stationary Seats:

1. TS M2N seal equip with 'G9' seat(DIN24960)
2. Stationary seal alternative: 'G6' (DIN 24960) and 'G4' seats

Seal size d(mm)	d _s	d _r	l ₁	l ₃
6	15	\	\	\
8	18	\	\	\
10	20	21	17.5	10.0
12	22	23	17.5	10.0
14	25	25	17.5	10.0
15	27	\	\	\
16	27	27	19.5	10.0
18	30	33	20.5	11.5
20	32	35	22.0	11.5

Seal size d(mm)	d _s	d _r	l ₁	l ₃
22	35	37	23.5	11.5
24	38	39	25.0	11.5
25	40	40	26.5	11.5
26	41	\	\	\
28	43	43	26.5	11.5
30	47	\	\	\
32	48	\	\	\
35	53	\	\	\
38	56	\	\	\