




SMM7N

波簧结构 SMM7N Wave Spring

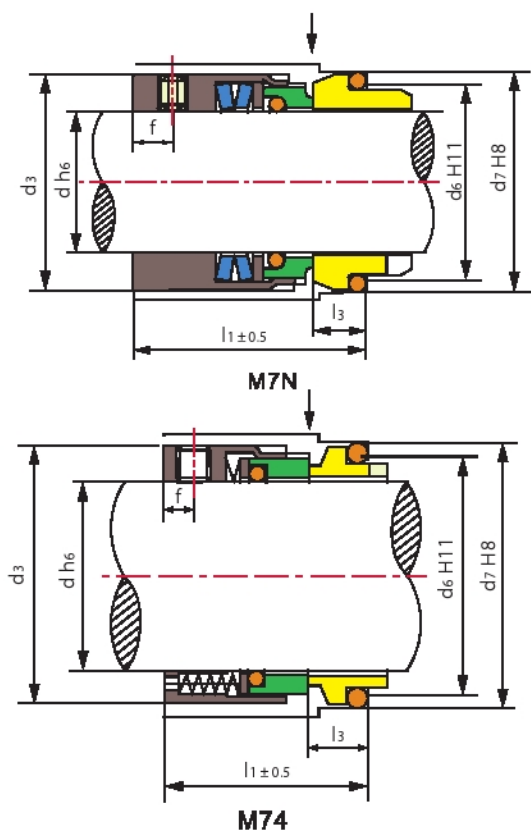

SMM74

多弹簧结构 SMM74 Multiple Spring

SM M7N SM M74

技术参数:

压力: $\leq 1.6\text{MPa}$ Pressure: $\leq 1.6\text{MPa}$
 线速度: $\leq 20\text{m/s}$ Speed: $\leq 20\text{m/s}$
 温度: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$ Temperature: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

Operating Limits

本表静环尺寸为G9静环符合DIN24960,如用户选配G4,G13,G6静环,请查对前"静环尺寸表"
 For G4,G6,G9,G13 seat, refer to the frontal "stationary seats dimensional data list"

- 动环(碳化硅/碳化钨/车制石墨)
- 静环(车制石墨/碳化硅/碳化钨)
- 辅助密封(氟胶/包覆圈)
- 金属件(不锈钢)
- 波簧(17-7PH/不锈钢)

- Rotary Ring (SiC/TC/Carbon)
- Stationary Ring (Carbon/SiC/TC)
- Secondary Seal(VITON/Encapsulated Ring)
- Metal Parts(SUS304/SUS316)
- Wave Spring(17-7PH/SUS304/SUS316)

Seal size d(mm)	d _s	d _e	d _r	l ₁	l ₃
14	25	21	25	35.0	10.0
16	27	23	27	35.0	10.0
18	33	29	33	37.5	11.5
20	35	29	35	37.5	11.5
22	37	31	37	37.5	11.5
24	39	33	39	40.0	11.5
25	40	34	40	40.0	11.5
28	43	37	43	42.5	11.5
30	45	39	45	42.5	11.5
32	47	42	48	42.5	11.5
33	48	42	48	42.5	11.5
35	50	44	50	42.5	11.5
38	55	49	56	45.0	14.0
40	57	51	58	45.0	14.0
43	60	54	61	45.0	14.0
45	62	56	63	45.0	14.0

Seal size d(mm)	d _s	d _e	d _r	l ₁	l ₃
48	65	59	66	45.0	14.0
50	67	62	70	47.5	15.0
53	70	65	73	47.5	15.0
55	72	67	75	47.5	15.0
58	79	70	78	52.5	15.0
60	81	72	80	52.5	15.0
63	84	75	83	52.5	15.0
65	86	77	85	52.5	15.0
8	89	81	90	52.5	18.0
70	91	83	92	60.0	18.0
75	99	88	97	60.0	18.0
80	104	95	105	60.0	18.2
85	109	100	110	60.0	18.2
90	114	105	115	65.0	18.2
95	119	110	120	65.0	17.2
100	124	115	125	65.0	17.2