
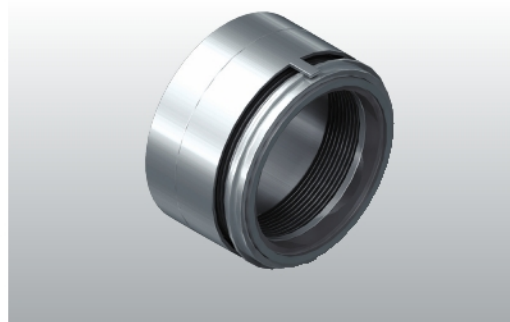


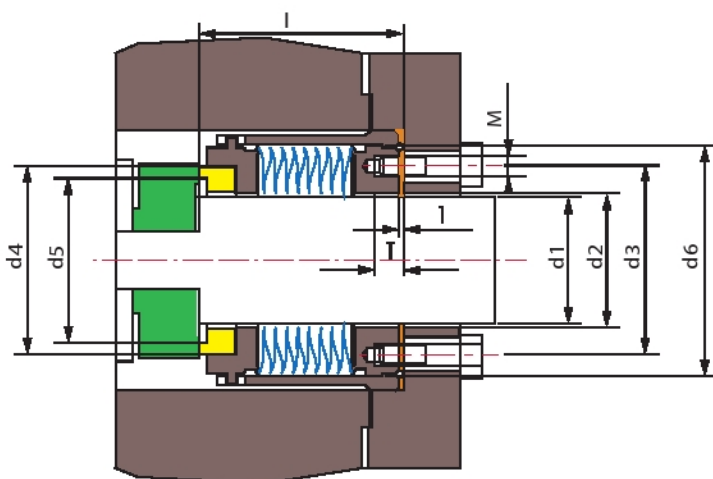

## SM MFL65

### 技术参数:

压力:  $\leq 2.5\text{MPa}$

速率:  $\leq 50\text{m/s}$

温度:  $-20^{\circ}\text{C} \sim +400^{\circ}\text{C}$

### Operating Limits

Pressure:  $\leq 2.5\text{MPa}$

Speed:  $\leq 50\text{m/s}$

Temperature:  $-20^{\circ}\text{C} \sim +400^{\circ}\text{C}$

- 动环(碳化硅/碳化钨)
- Rotary Ring(SiC/TC)
- 静环(碳化硅/石墨/碳化钨)
- Stationary Ring(SiC/Carbon/TC)
- 辅助密封(包覆圈/柔性石墨)
- Secondary Seal(Encapsulated Ring/Flexible Carbon)
- 金属波纹管(SUS316L/AM350/Inconel718/  
钛材/哈氏C/合金20)
- Metal Bellows(SUS316L/AM350/Inconel718  
/Titanium/Hastelloy-C/Alloy-20)
- 其它部件(SUS304/SUS316/钛材/哈氏-C)
- Other Parts(SUS304/SUS316/Titanium/Hastelloy-C)

| shaft<br>(inches) | d <sub>1</sub> | d <sub>2</sub> | d <sub>3</sub> | d <sub>4</sub> | d <sub>5</sub> | d <sub>6</sub> | l    | M      | T |
|-------------------|----------------|----------------|----------------|----------------|----------------|----------------|------|--------|---|
| 19                | 16~19          | 20.5           | 29             | 30.3           | 25.3           | 45.0           | 33.5 | 4 x M4 | 6 |
| 24                | 20~24          | 25.5           | 35             | 38.8           | 33.8           | 49.0           | 33.5 | 4 x M4 | 6 |
| 30                | 25~30          | 31.5           | 40             | 43.6           | 38.6           | 55.0           | 34.5 | 6 x M4 | 6 |
| 35                | 31~35          | 36.0           | 45             | 45.8           | 40.8           | 59.0           | 33.0 | 6 x M4 | 6 |
| 40                | 36~40          | 41.0           | 50             | 51.5           | 46.5           | 65.0           | 30.5 | 6 x M4 | 6 |
| 45                | 41~45          | 46.0           | 55             | 55.2           | 50.2           | 69.0           | 35.5 | 6 x M4 | 6 |
| 51                | 46~51          | 52.0           | 63             | 64.7           | 59.7           | 76.5           | 40.5 | 6 x M5 | 7 |
| 60                | 52~60          | 61.0           | 70             | 70.6           | 65.6           | 84.0           | 32.0 | 6 x M5 | 7 |
| 70                | 61~70          | 71.0           | 80             | 82.8           | 76.8           | 95.0           | 38.0 | 6 x M5 | 7 |
| 82                | 71~82          | 83.5           | 95             | 98.0           | 92.0           | 112.0          | 41.0 | 6 x M6 | 7 |
| 88                | 83~88          | 89.5           | 100            | 107.7          | 101.7          | 120.0          | 47.0 | 6 x M6 | 7 |
| 100               | 89~100         | 101.0          | 112            | 112.7          | 106.7          | 130.0          | 47.0 | 6 x M6 | 7 |