


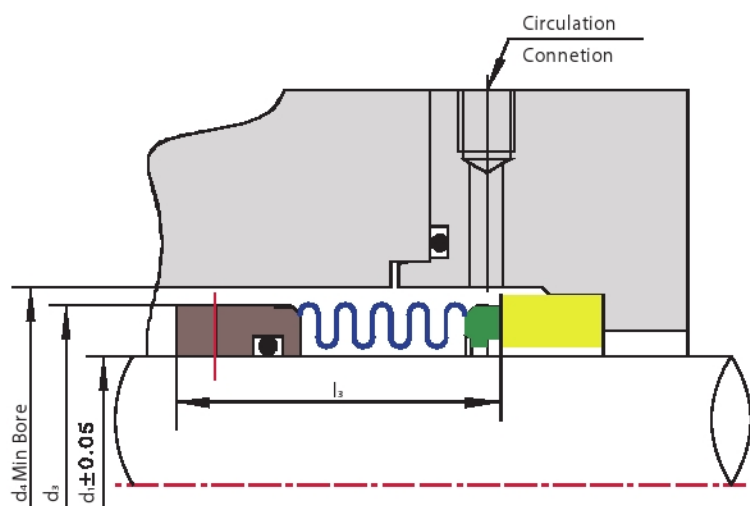

SM-MFL95N

技术参数:

压力: $\leq 1\text{MPa}$
速度: $\leq 25\text{m/s}$
温度: $-40^\circ\text{C} \sim +230^\circ\text{C}$

Operating Limits

Pressure: $\leq 1\text{MPa}$
Speed: $\leq 25\text{m/s}$
Temperature: $-40^\circ\text{C} \sim +230^\circ\text{C}$

- 动环(石墨/碳化硅/无压碳化硅/碳化钨)
- 静环(石墨/碳化硅/无压碳化硅)
- 膨胀金属波纹管(SUS304/SUS316/AM350/Inconel718/钛材/哈氏C/合金20)
- 其他部件(SUS304/SUS316/钛材/哈氏C)
- Rotary Ring(Carbon/SiC/SSiC/TC)
- Stationary Ring(Carbon/SiC/SSiC)
- Expand Metal Bellows(SUS304/SUS316/AM350/Inconel718/Titanium/Hastelloy-C/Alloy-20)
- Other Parts(SUS304/SUS316/Titanium/Hastelloy-C)

seal size (mm)	d ₁	d ₃	d ₄	l ₃
0.750	19.05	31.00	34.90	31.50
0.875	22.23	36.00	38.10	37.00
1.000	25.40	39.00	41.30	37.50
1.125	28.58	42.00	44.50	38.00
1.250	31.75	46.00	47.60	43.00
1.375	34.93	48.50	50.80	43.00
1.500	38.10	51.50	57.20	42.00
1.625	41.28	58.40	60.30	47.00
1.750	44.45	58.40	63.50	47.00
1.875	47.63	63.70	66.70	46.50
2.000	50.80	63.70	69.90	46.50
2.125	53.98	69.00	73.00	56.50
2.250	57.15	73.30	76.20	56.50
2.375	60.33	76.70	79.40	56.50
2.500	63.50	79.40	82.60	56.50
2.625	66.68	83.00	85.70	66.50
2.750	69.85	87.80	96.00	65.50
2.875	73.02	94.00	99.00	65.50
3.000	76.20	94.00	100.00	65.50
3.125	79.37	100.60	104.00	75.00
3.250	82.55	100.60	108.00	75.00
3.375	85.72	106.00	111.00	75.00
3.500	88.90	110.30	115.00	75.00
3.625	92.07	114.90	118.00	75.00
3.750	95.25	114.90	121.00	75.00
3.875	98.42	121.30	124.00	75.00
4.000	101.60	121.30	127.00	75.00