
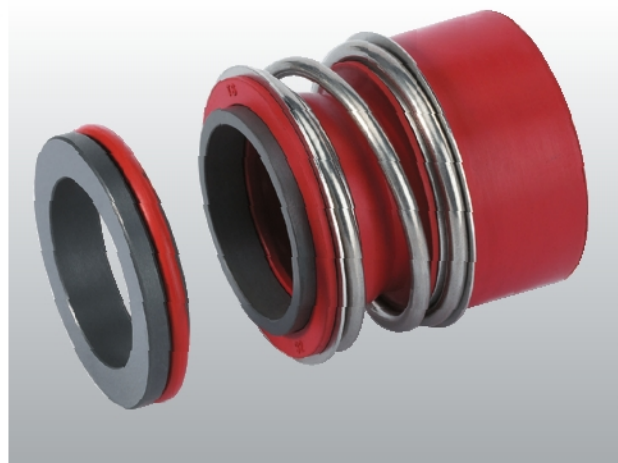


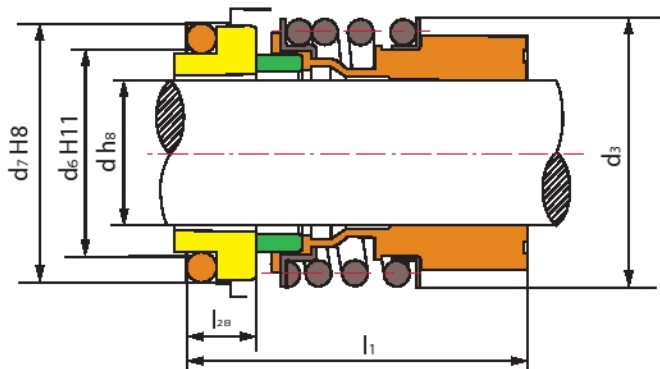

SM MG13

技术参数:

压力: $\leq 1.2\text{MPa}$
线速度: $\leq 10\text{m/s}$
温度: $-20^{\circ}\text{C} \sim +180^{\circ}\text{C}$

Operating Limits

Pressure: $\leq 1.2\text{MPa}$
Speed: $\leq 10\text{m/s}$
Temperature: $-20^{\circ}\text{C} \sim +180^{\circ}\text{C}$

- 动环(车制石墨/碳化硅)
- 静环(陶瓷/碳化硅/碳化钨)
- 辅助密封(丁腈胶/三元乙丙胶/氟胶)
- 传动套(不锈钢)
- 弹簧(不锈钢)
- 弹簧座(不锈钢)

- Rotary Ring(Carbon/SiC)
- Stationary Ring(Ceramic/SiC/TC)
- Secondary Seal(NBR/EPDM/VITON)
- Retainer(SUS304/SUS316)
- Spring(SUS304/SUS316)
- Spring Holder(SUS304/SUS316)

Seal size d(mm)	d ₃	d ₆	d ₇	l ₁	l ₂₈
24	42.5	33	39	50	7.5
25	42.5	34	40	50	7.5
28	49.0	37	43	50	7.5
30	49.0	39	45	50	7.5
32	53.5	42	48	55	7.5
35	57.0	44	50	55	7.5
38	59.0	49	56	55	9.0
40	62.0	51	58	55	9.0