
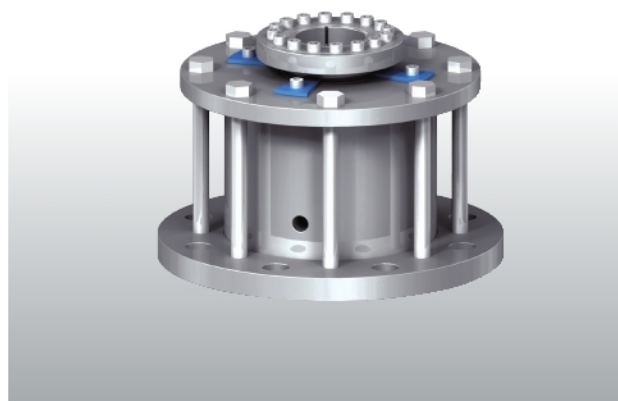


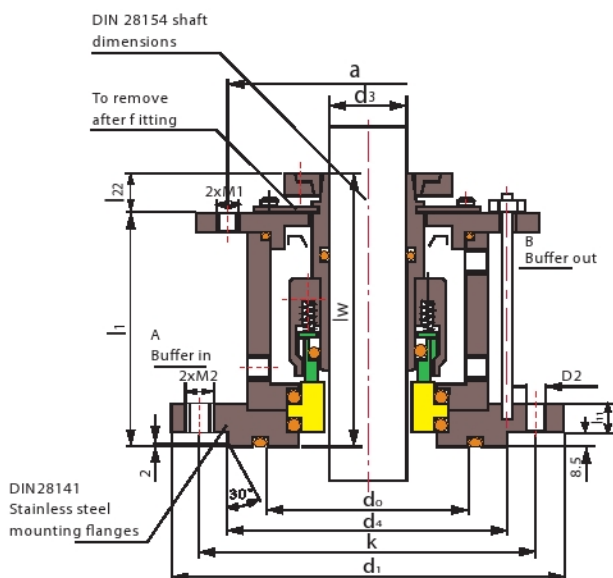

SM-U01

技术参数:

压力: <2.1MPa(轴径≤75mm)
<1.3MPa(轴径>75mm)
速率: ≤25m/s
温度: -30°C ~ +205°C

Operating Limits


Pressure: <2.1MPa(shaft diameter≤75mm)
<1.3MPa(shaft diameter>75mm)
Speed: ≤25m/s
Temperature: -30°C ~ +205°C

- 动环(碳化硅/石墨/碳化钨)
- 静环(碳化硅/陶瓷)
- 辅助密封(氟胶/包覆圈/聚四氟乙烯)
- 其它部件(SUS304/SUS316/钛材/哈氏-C)

- Rotary Ring(SiC/Carbon/TC)
- Stationary Ring(SiC/Ceramic)
- Secondary Seal(VITON/Encapsulated Ring/PTFE)
- Other Parts(SUS304/SUS316/Titanium/Hastelloy-C)


d ₃ (mm)	d ₇	d ₁	D ₂ xn	d ₄	d ₀	k	l ₁	l ₂	lw	l ₁₁	l ₂₂	a	M ₁	M ₂	A,B
40	38	175	18x4	110	90	145	110.5	159.5	143	15	28	122	M12	M16	3/8G
50	48	240	18x8	176	135	210	114.5	174.5	148	17	28	157	M12	M16	3/8G
60	58	240	18x8	176	135	210	119.0	181.5	158	17	28	168	M12	M16	3/8G
80	78	275	22x8	204	155	240	133.0	217.5	168	20	34	203	M16	M20	1/2G
100	98	305	22x8	234	190	270	137.5	218.5	178	20	34	228	M16	M20	1/2G
125	120	330	22x8	260	215	295	138.5	233.5	203	20	40	268	M20	M20	1/2G
140	135	395	22x12	313	250	350	152.5	250.5	208	20	40	285	M20	M20	1/2G
160	150	395	22x12	313	265	350	161.0	253.0	213	25	40	297	M20	M20	1/2G
180	170	445	22x12	364	310	400	166.0	263.5	233	25	45	332	M24	M20	1/2G
200	190	445	22x12	364	310	400	171.0	271.0	243	25	45	352	M24	M20	1/2G
220	210	505	22x16	422	340	460	\	\	263	25	\	\	M24	M20	1/2G

SM-U02

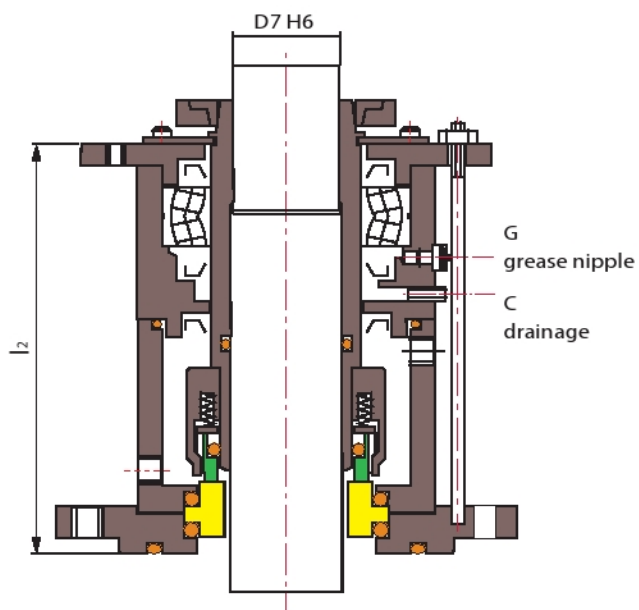


尺寸及参数同 SM - U01
Size and operating limits same as SM - U01

SM-U03

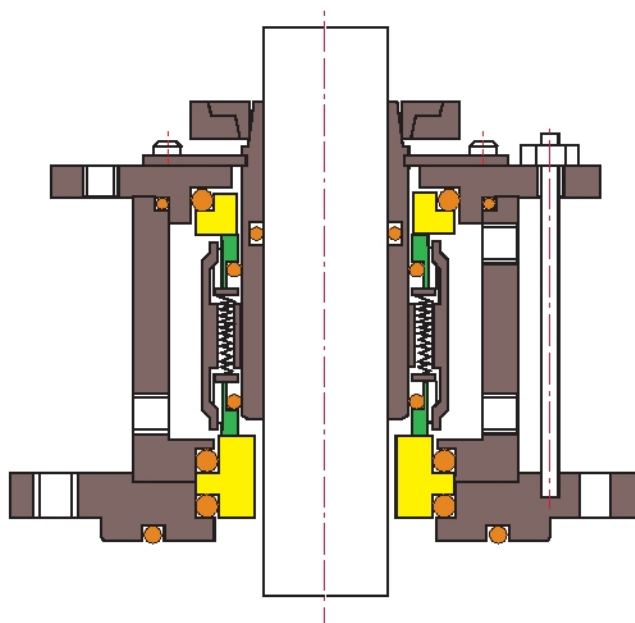

尺寸及参数同 SM - U01
Size and operating limits same as SM - U01

SM-U04

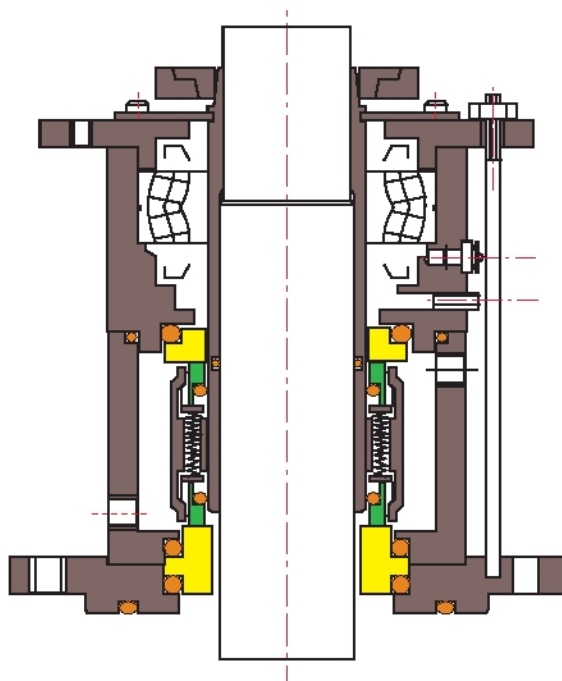

尺寸及参数同SM - U01
Size and operating limits same as SM - U01

