

SM WB2

技术参数:

压力: $\leq 0.5\text{MPa}$

线速度: $\leq 11\text{m/s}$



温度: $-20^{\circ}\text{C} \sim +125^{\circ}\text{C}$

Operating Limits

Pressure: $\leq 0.5\text{MPa}$

Speed: $\leq 11\text{m/s}$

Temperature: $-20^{\circ}\text{C} \sim +125^{\circ}\text{C}$

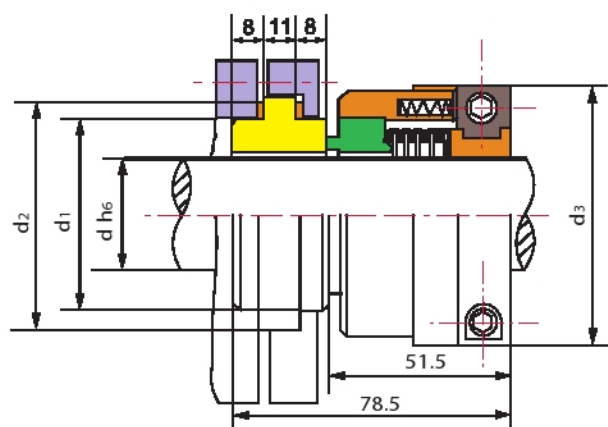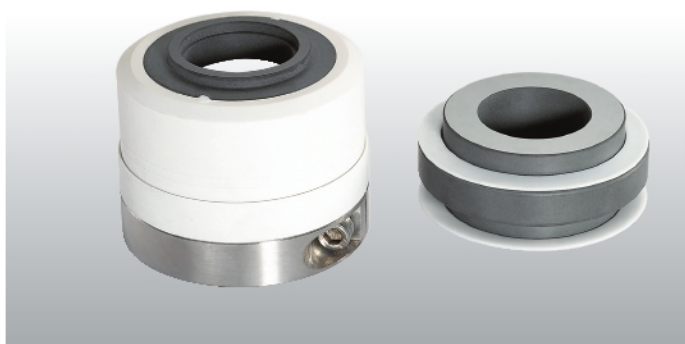

- 动环(填充聚四氟乙烯/碳化硅)
- 静环(99瓷/碳化硅)
- 辅助密封(聚四氟乙烯)
- 弹簧及其它金属件(不锈钢)
- Rotary Ring (Filled PTFE/SiC)
- Stationary Ring (99% Ceramic/SiC)
- Secondary Seal (PTFE)
- Spring & Other Parts (SUS304/SUS316)

介质: 强酸、强氧化剂和其它强腐蚀性液体;
不适用于碱、氢氟酸和含颗粒溶液。

Medium: Strong acid, strong oxidant and other
strong corrosive liquid. Not apply to alkali,
hydrofluoric acid and solution with impurity

设计特点:

- a. 外装、单端面、多弹簧、聚四氟乙烯波纹管结构机械密封。
- b. 为非推进式、内在平衡型密封、补偿机构浮动性好,密封可靠。

Design Features:

- a. Externally mounted, single face, multiple springs and PTFE bellows
- b. Non-pusher, internal balanced structure, fine fluctuation of compensation and reliable seal

Seal size d(mm)	d ₃	d ₁	d ₂
30	74	54	68
35	79	58	71
40	84	63	77
45	89	70	84
50	96	73	87
55	101	77	90
60	106	86	102
65	111	87	100