


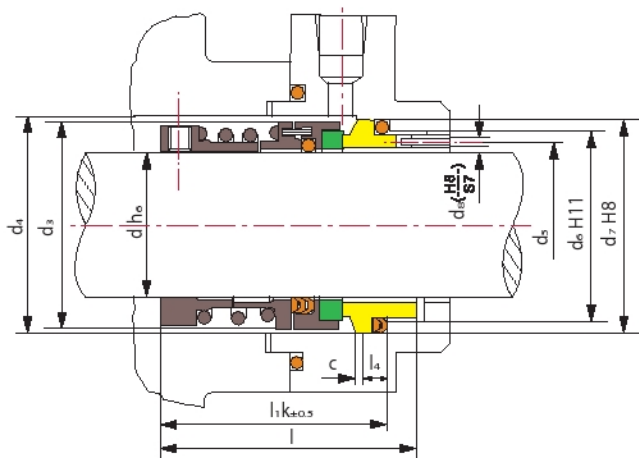

SM ZU4

技术参数:

压力: 0~1MPa

线速度: $\leq 20\text{m/s}$

温度: $-20^{\circ}\text{C} \sim +180^{\circ}\text{C}$

Operating Limits

Pressure: 0~1MPa

Speed: $\leq 20\text{m/s}$

Temperature: $-20^{\circ}\text{C} \sim +180^{\circ}\text{C}$

- 动环(碳化硅/碳化钨)
- 静环(车制石墨/碳化硅/碳化钨)
- 辅助密封(三元乙丙胶/氟胶/聚四氟乙烯)
- 弹簧及其它金属件(不锈钢)

- Rotary Ring (SiC/TC)
- Stationary Ring (Carbon/SiC/TC)
- Secondary Seal(EPDM/VITON/PTFE)
- Spring & Other Parts(SUS304/SUS316)

介质:水、油,易结晶的酸、碱、高粘度的液体,纸浆等

Medium: water, oil, crystallizing acid, alkali, high viscosity liquid, paper pulp, etc.

设计特点:

除安装长度外,其它尺寸符合
ISO3069,DIN24960和GB6556标准

Design Features:

Except for the install length, all other dimensions are conform to ISO3069 DIN24960 and GB6556 standards.

Seal size d(mm)	d ₃	d ₄	d ₆	d ₇	d ₈	d ₉	l	l:k	l _a	c
		min					(±0.5)	(±0.5)		
18	32	34	27	33	23	3	52.0	45.0	5	2.0
20	34	36	29	35	25	3	52.0	45.0	5	2.0
22	36	38	31	37	27	3	53.0	46.0	5	2.0
24	38	40	33	39	29	3	56.0	49.0	5	2.0
25	39	41	34	40	30	3	56.0	49.0	5	2.0
28	42	44	37	43	33	3	56.5	49.5	5	2.0
30	44	46	39	45	35	3	57.0	50.0	5	2.0
32	46	48	42	48	38	3	58.5	51.5	5	2.0
33	47	49	42	48	38	3	58.8	51.5	5	2.0
35	49	51	44	50	40	3	58.5	51.5	5	2.0
38	54	58	49	56	44	4	62.0	55.0	6	2.0
40	56	60	51	58	46	4	62.0	55.0	6	2.0
43	59	63	54	61	49	4	65.0	58.0	6	2.0
45	61	65	56	63	51	4	65.0	58.0	6	2.0
48	64	68	59	66	54	4	66.0	59.0	6	2.0
50	66	70	62	70	57	4	67.0	60.0	6	2.5
53	69	73	65	73	60	4	71.5	64.5	6	2.5
55	71	75	67	75	62	4	73.5	66.5	6	2.5
58	78	83	70	78	65	4	76.5	69.5	6	2.5
60	80	85	72	80	67	4	76.5	69.5	6	2.5
63	83	88	75	83	70	4	78.5	71.5	6	2.5
65	85	90	77	85	72	4	81.5	74.5	6	2.5
68	88	93	81	90	75	4	82.5	75.5	7	2.5
70	90	95	83	92	77	4	86.5	79.5	7	2.5
75	99	104	88	97	82	4	87.0	80.0	7	2.5
80	104	109	95	105	88	4	90.5	83.5	7	3.0
85	109	114	100	110	93	4	90.5	83.5	7	3.0
90	114	119	105	115	98	4	92.5	85.5	7	3.0
95	119	124	110	120	103	4	93.5	86.5	7	3.0
100	124	129	115	125	108	4	93.5	86.5	7	3.0