
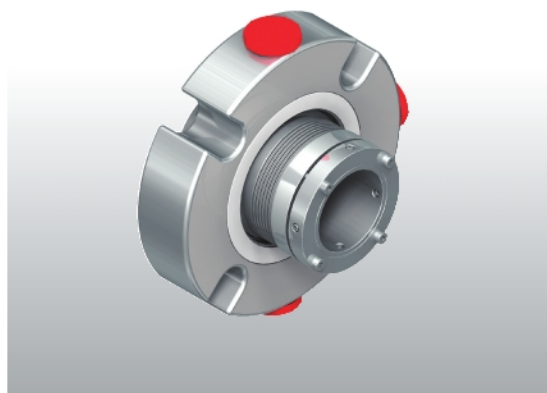


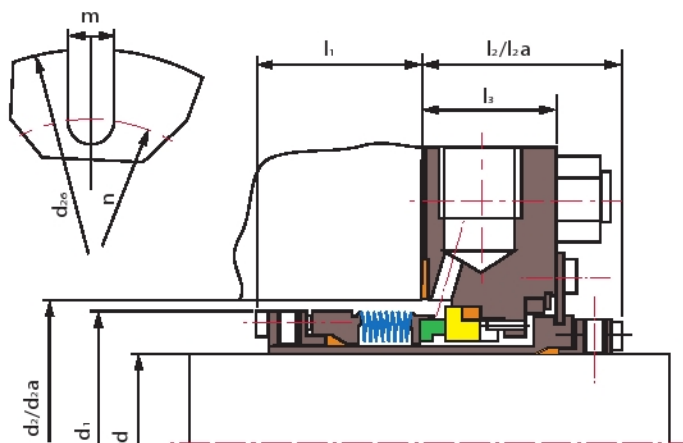

SM-1604

技术参数:

压力: $\leq 2\text{MPa}$
速率: $\leq 20\text{m/s}$
温度: $-73^{\circ}\text{C} \sim +427^{\circ}\text{C}$

Operating Limits

Pressure: $\leq 2\text{MPa}$
Speed: $\leq 20\text{m/s}$
Temperature: $-73^{\circ}\text{C} \sim +427^{\circ}\text{C}$

- 动环(碳化硅/石墨/碳化钨) ● Rotary Ring(SiC/Carbon/TC)
- 静环(碳化硅/碳化钨) ● Stationary Ring(SiC/TC)
- 辅助密封(柔性石墨) ● Secondary Seal(Flexible Carbon)
- 金属波纹管(SUS316L/AM350/Inconel718/
钛材/哈氏C/合金20) ● Metal Bellows(SUS316L/AM350/Inconel718
/Titanium/Hastelloy-C/Alloy-20)
- 其它部件(SUS304/SUS316/钛材/哈氏-C) ● Other Parts(SUS304/SUS316/Titanium/Hastelloy-C)

d (inches)	d _{2o} max	d ₂ min	d _{2a} min	d ₁ max	l ₁ min	l ₂ max	l _{2a} max	n			m max	l ₃ max	NPT
								3/8"	1/2"	5/8"			
1.125	4.250	2.000	2.250	1.940	1.640	1.920	2.050	3.120	3.240	\	0.500	1.260	3/8
1.125	4.250	1.880	2.130	0.810	1.580	1.920	2.050	2.870	\	\	0.440	1.260	3/8
1.250	4.500	2.250	2.380	2.170	1.680	1.920	2.050	3.190	3.310	\	0.500	1.260	3/8
1.375	4.750	2.380	2.630	2.300	1.680	1.990	2.110	3.490	3.620	\	0.560	1.320	3/8
1.375	4.250	2.130	2.380	2.060	1.640	1.920	2.050	3.240	\	\	0.440	1.260	3/8
1.500	5.250	2.500	2.750	2.420	1.680	1.990	2.110	3.620	3.740	\	0.560	1.320	1/2
1.625	5.500	2.630	2.880	2.550	1.680	1.990	2.110	3.740	3.870	\	0.560	1.320	1/2
1.750	5.750	2.750	3.000	2.670	1.680	1.990	2.110	3.870	3.990	\	0.560	1.320	1/2
1.875	6.000	2.880	3.250	2.800	1.800	2.050	2.170	4.120	4.240	\	0.560	1.380	1/2
2.000	6.250	3.000	3.380	2.920	1.800	2.050	2.170	4.240	4.370	4.490	0.690	1.380	1/2
2.125	6.250	3.130	3.500	3.050	1.800	2.050	2.170	4.370	4.490	4.620	0.690	1.380	1/2
2.250	6.500	3.250	3.630	3.190	1.800	2.050	2.170	4.490	4.620	4.740	0.690	1.380	1/2
2.375	6.500	3.380	3.630	3.310	1.800	2.110	2.240	4.490	4.620	4.740	0.690	1.450	1/2
2.500	6.500	3.500	3.750	3.440	1.800	2.110	2.240	4.620	4.740	4.870	0.690	1.450	1/2
2.625	6.750	3.750	4.000	3.630	1.830	2.110	2.240	4.870	4.990	5.120	0.690	1.450	1/2

d (mm)	d _{2o} max	d ₂ min	d _{2a} min	d ₁ max	l ₁ min	l ₂ max	l _{2a} max	n			m max	l ₃ max	NPT
								10mm	12mm	16mm			
25	108	48	54	46	42	49	52	76	78	\	13	32	3/8
30	108	51	57	49	42	49	52	79	82	\	13	32	3/8
32	114	57	60	55	43	49	52	81	99	\	13	32	3/8
35	121	60	67	58	43	50	54	89	92	\	14	34	3/8
38	133	64	70	61	43	50	54	92	95	\	14	34	1/2
40	140	67	73	65	43	50	54	95	98	\	14	34	1/2
42	140	67	73	65	43	50	54	95	98	\	14	34	1/2
45	146	70	76	68	43	50	54	98	101	\	14	34	1/2
50	159	76	80	74	46	52	55	108	111	114	18	35	1/2
55	159	79	89	77	46	52	55	111	114	117	18	35	1/2
60	165	86	92	84	46	54	57	114	117	120	18	37	1/2
65	165	89	95	87	46	54	57	117	120	123	18	37	1/2